Assignment -4
Distance Detection Using Ultrasonic Sensor

Assignment Date	20 October 2022
Students Name	Madhavan S Mithileash T Mohammed Maaz K Mohamed Irfan A
Students Roll Number	312419106076 312419106081 312419106085 312419106082
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK : https://wokwi.com/projects/345964118720643668

CODE:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-------credentials of IBM Accounts------

#define ORG "f59trs"//IBM ORGANITION ID
#define DEVICE_TYPE "ultrasonicsensor"//Device type mentioned in
ibm watson IOT Platform
#define DEVICE_ID "distancedetection"//Device ID mentioned in ibm
watson IOT Platform
#define TOKEN "AlGMGaaF01nawa1QA3"      //Token
String data3;
float dist;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";//
Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and
type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String";//
cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client
id


//-------------------------------------------------------------
```

```
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient);
//calling the predefined client id by passing parameter like
server id,portand wificredential

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
Serial.begin(115200);
pinMode(trig,OUTPUT);
pinMode(echo,INPUT);
pinMode(LED, OUTPUT);
delay(10);
wificonnect();
mqttconnect();
}
void loop()// Recursive Function
{

 digitalWrite(trig,LOW);
  digitalWrite(trig,HIGH);
  delayMicroseconds(10);
  digitalWrite(trig,LOW);
  float dur = pulseIn(echo,HIGH);
  float dist = (dur * 0.0343)/2;
  Serial.print ("Distancein cm");
  Serial.println(dist);


  PublishData(dist);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}



/*.....................................retrieving to
Cloud. ............................. */

void PublishData(float dist) {
  mqttconnect();//function call for connecting to ibm
  /*
     creating the String in in form JSon to update the data to
ibm cloud
  */
```

```
  String object;
  if (dist <100)
  {
    digitalWrite(LED,HIGH);
    Serial.println("object is near");
    object = "Near";
  }
  else
  {
    digitalWrite(LED,LOW);
    Serial.println("no object found");
    object = "No";
  }

  String payload = "{\"distance\":";
  payload += dist;
  payload += "," "\"object\":\"";
  payload += object;
  payload += "\"}";


  Serial.print("Sending payload: ");
  Serial.println(payload);




  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data
on the cloud then it will print publish ok in Serial monitor or
else it will print publish failed
  } else {
    Serial.println("Publish failed");
  }

}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }

     initManagedDevice();
     Serial.println();
  }
```

```
}
void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");

  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials
to establish the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength)
{

  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }

//   Serial.println("data: "+ data3);
//   if(data3=="Near")
//   {
// Serial.println(data3);
// digitalWrite(LED,HIGH);

//   }

//   else
//   {
```

```
// Serial.println(data3);
// digitalWrite(LED,LOW);

//    }
data3="";


}
```

OUTPUT :

When object is not near to the ultrasonic sensor

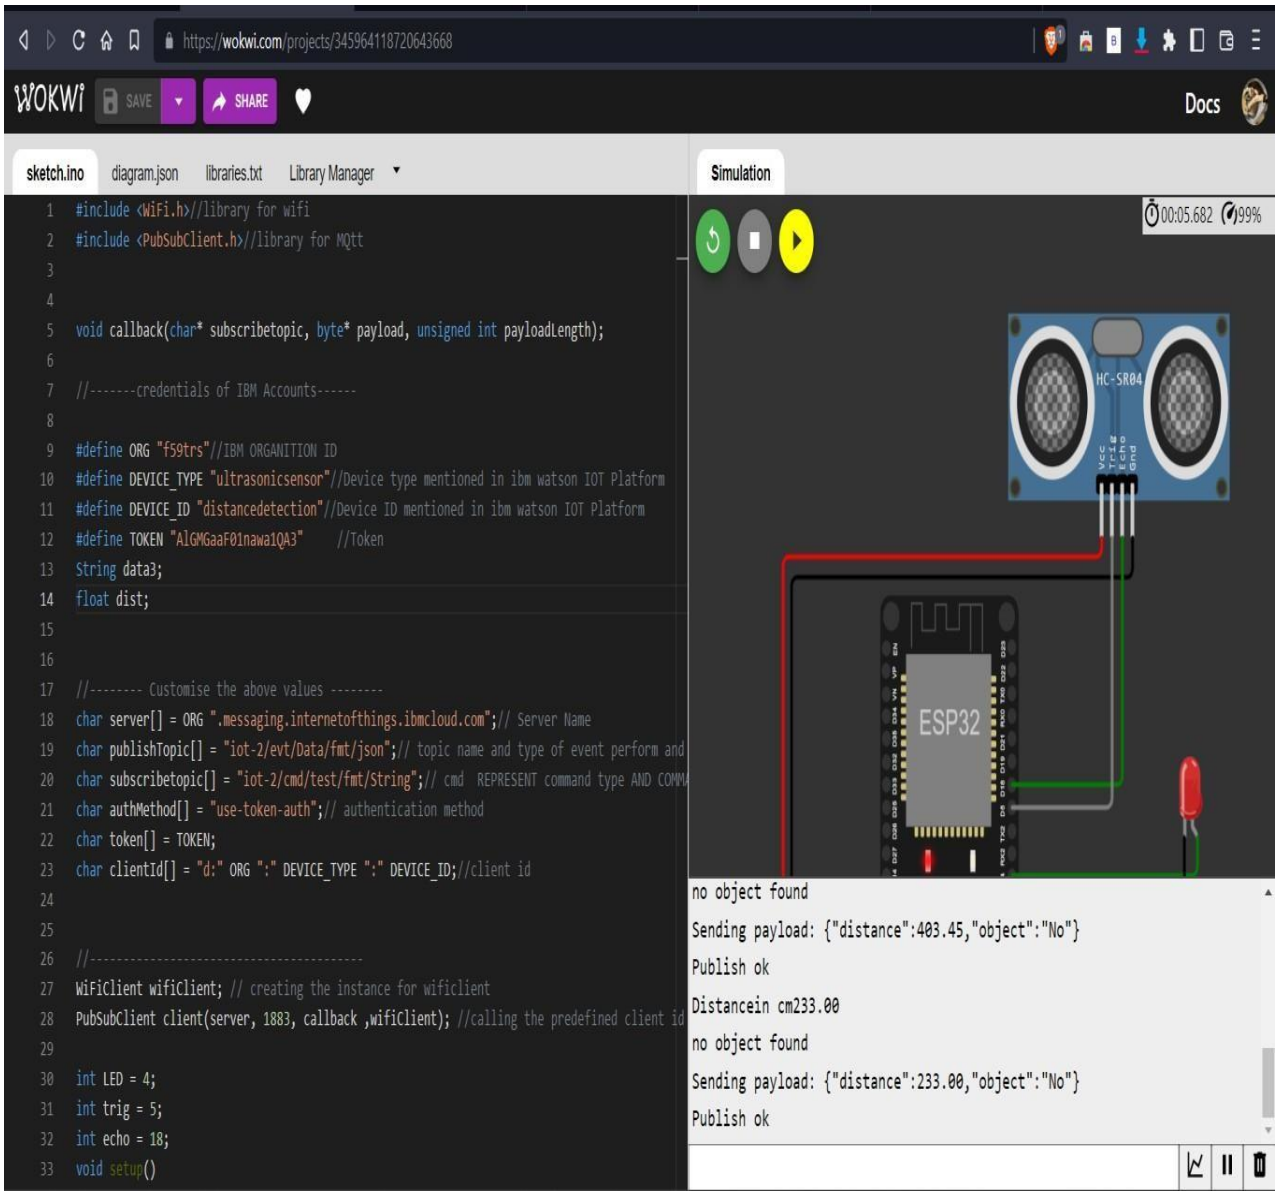


```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-------credentials of IBM Accounts------

#define ORG "f59trs"//IBM ORGANITION ID
#define DEVICE_TYPE "ultrasonicsensor"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "distancedetection"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "AlGMGaaF01nawa1QA3"     //Token
String data3;
float dist;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMM
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
```

Data sent to the IBM cloud device when the object is far

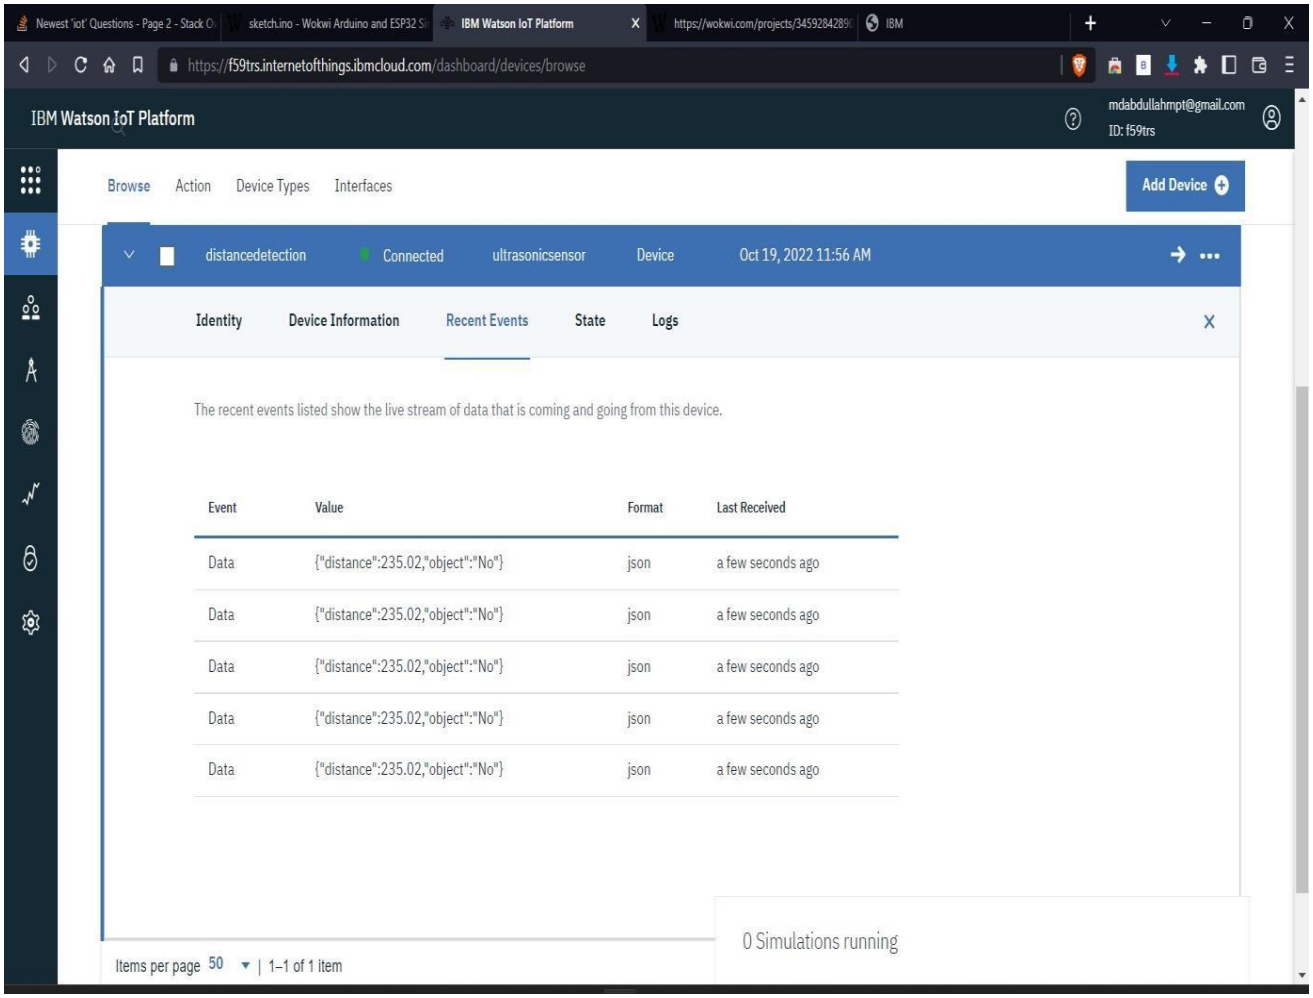

When object is nearer to the ultrasonic sensor

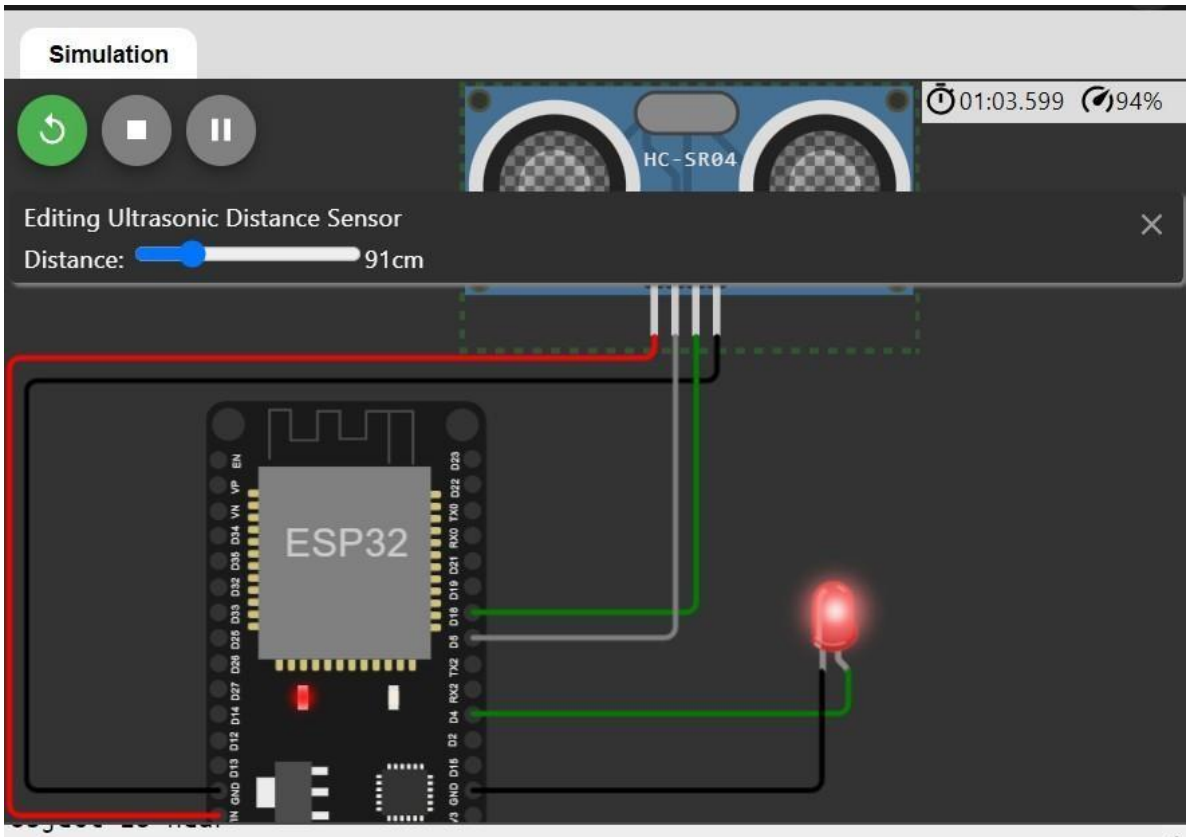

Data sent to the IBM cloud device when the object is near

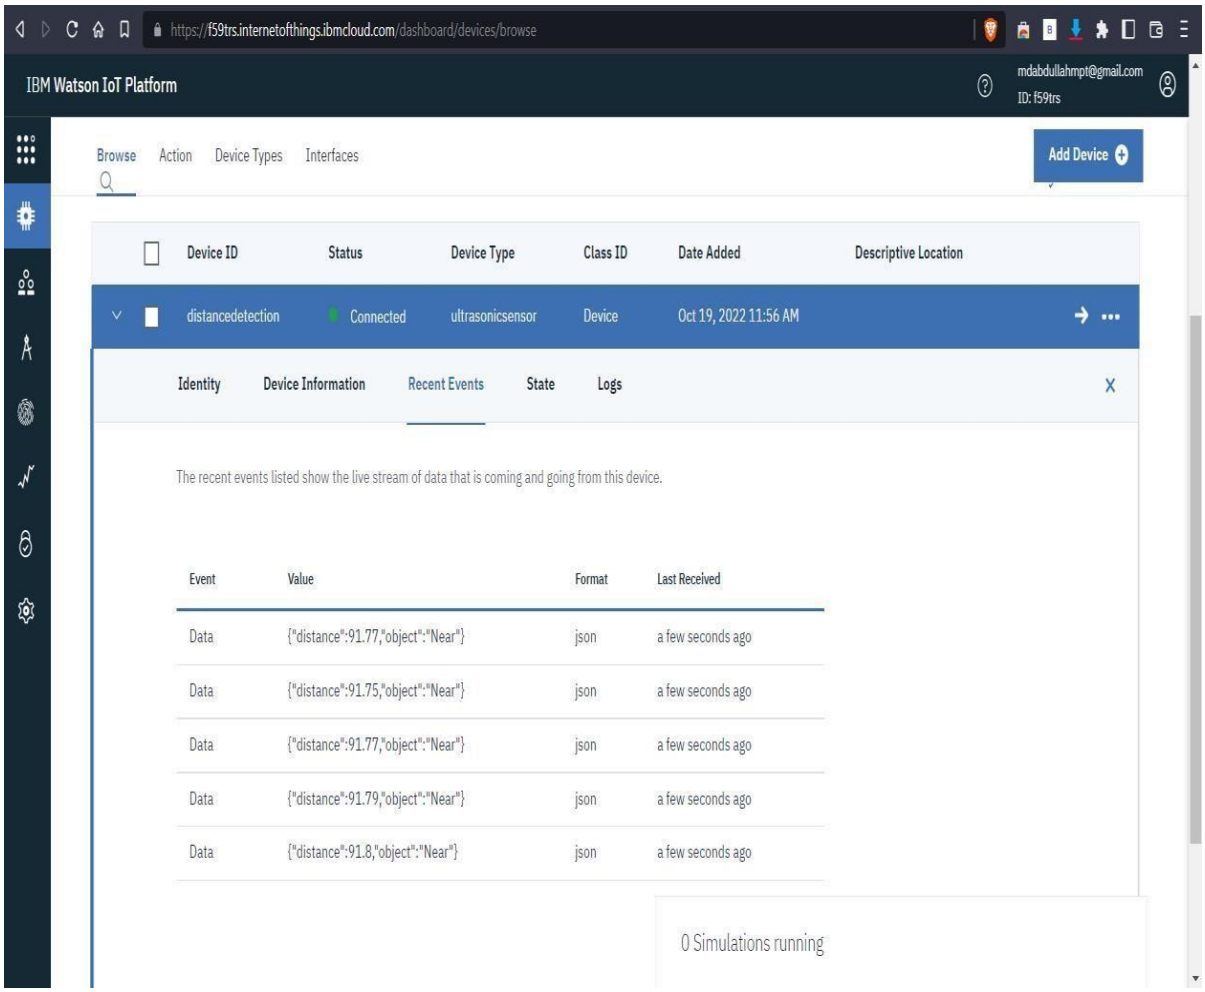

https://wokwi.com/projects/345964118720643668