
Learn the Basics: React Native

Build native mobile apps using the React framework you already know.

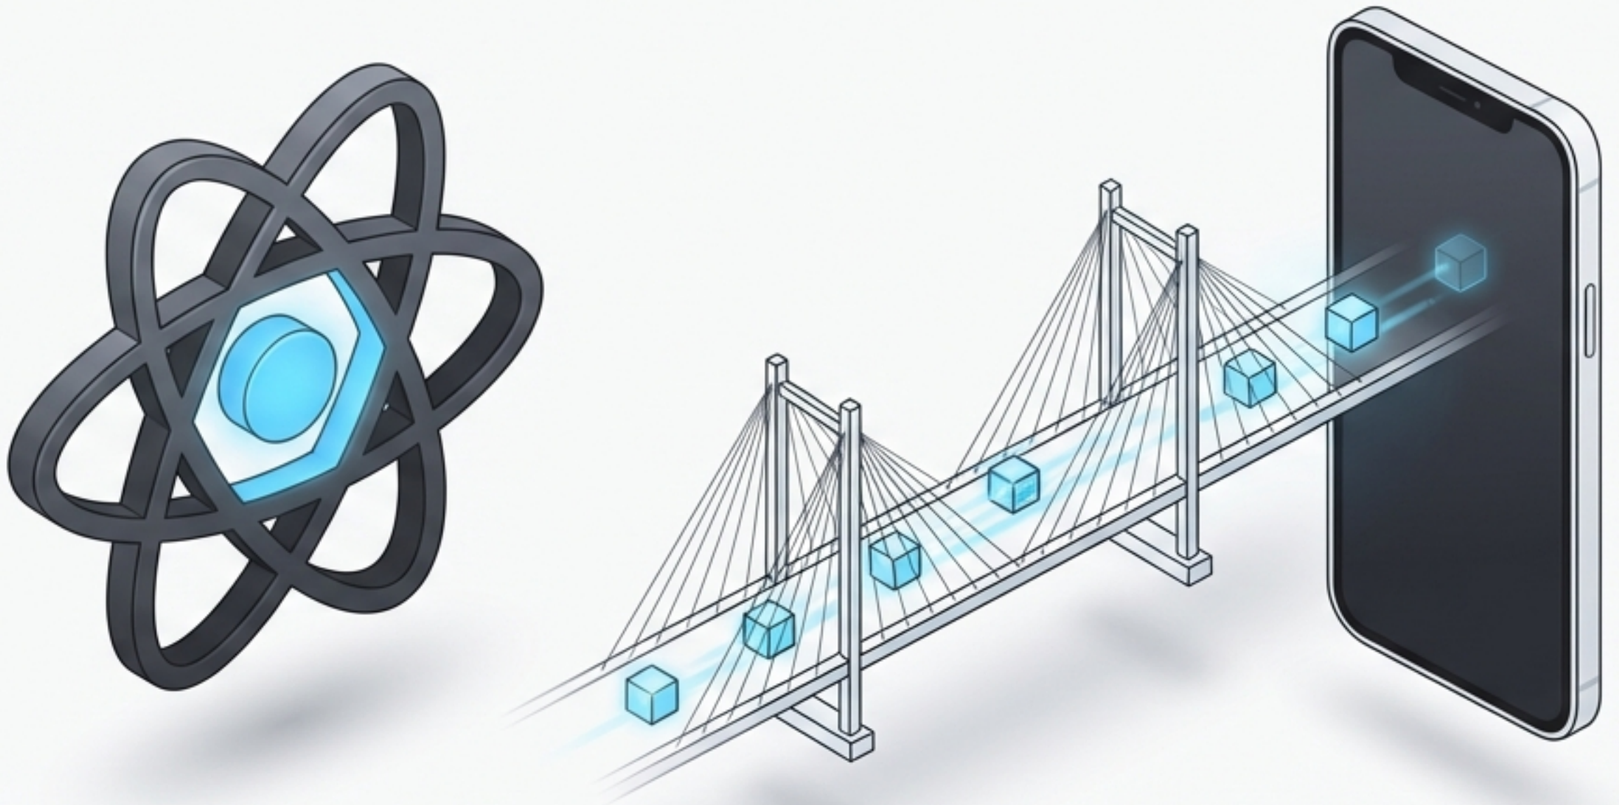


Based on "Learn the Basics" v0.77

NotebookLM

React Native is React, but with Native Components

The logic remains the same; only the output tags change.

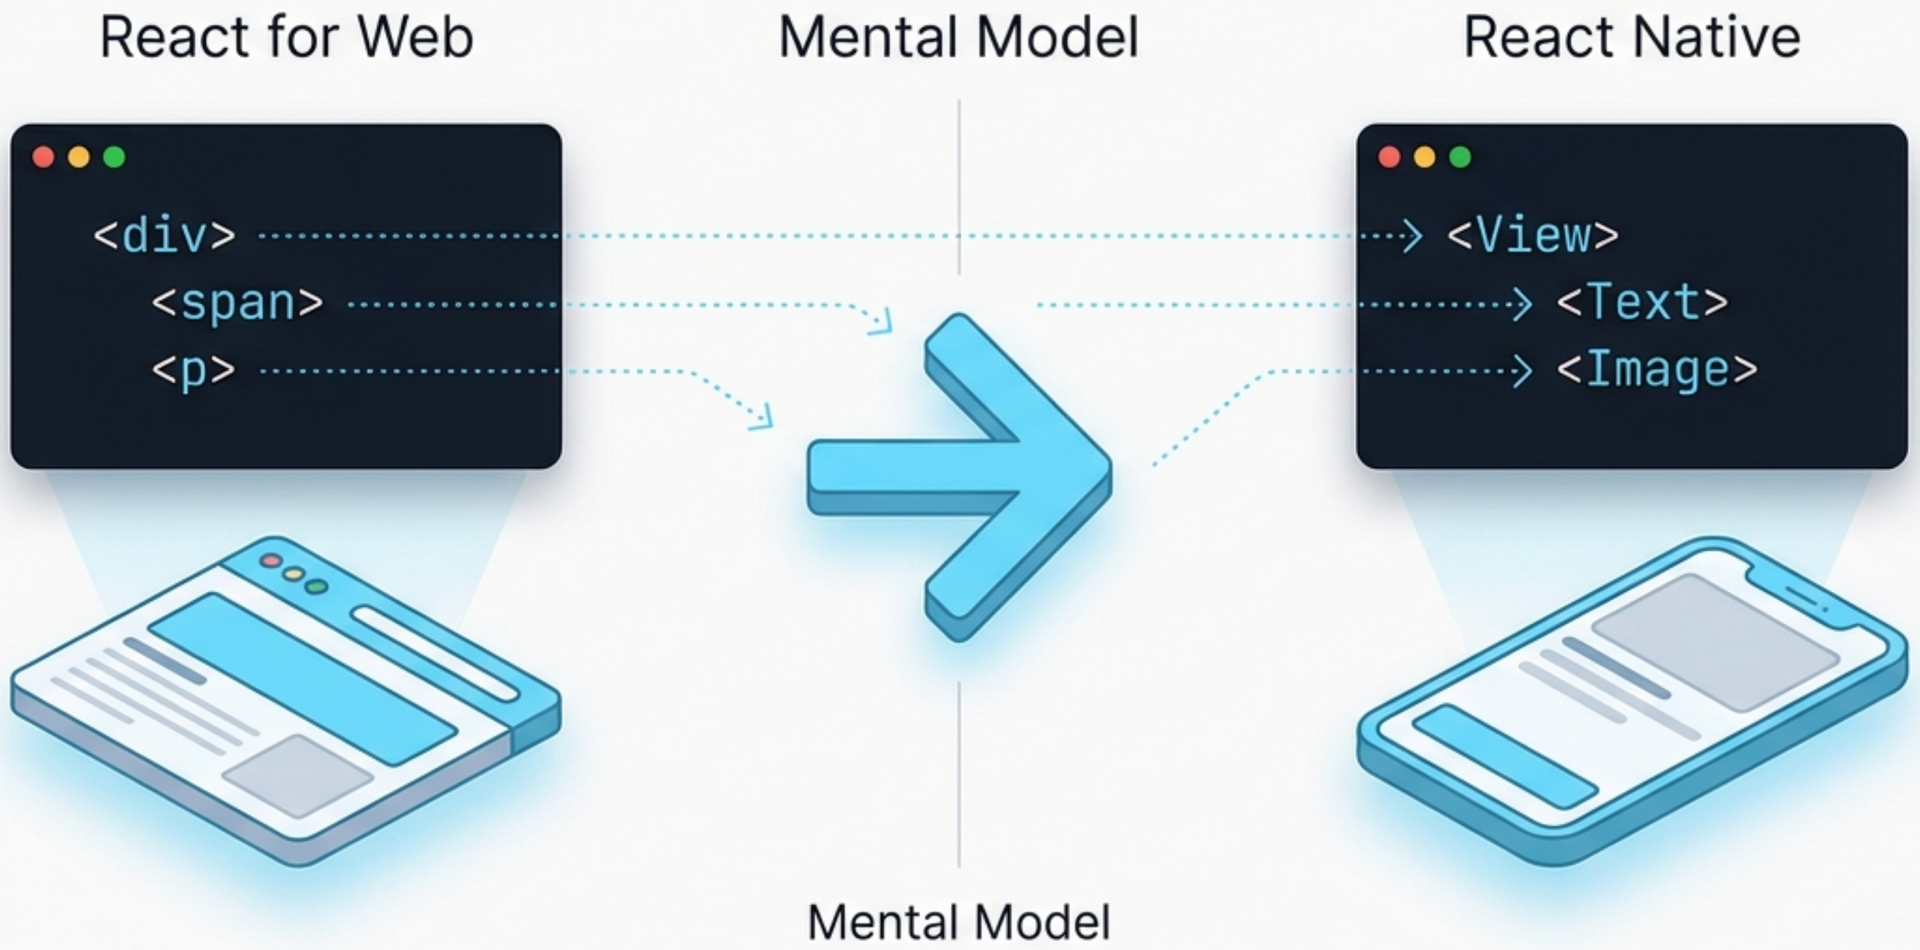


NotebookLM

The Specimen: Hello World

```jsx
import React from 'react';
import {Text, View} from 'react-native';

const HelloWorldApp = () => {
  return (
    <View style={{
      flex: 1,
      justifyContent: 'center',
      alignItems: 'center',
    }}>
      <Text>Hello, world!</Text>
    </View>
  );
};

export default HelloWorldApp;
```

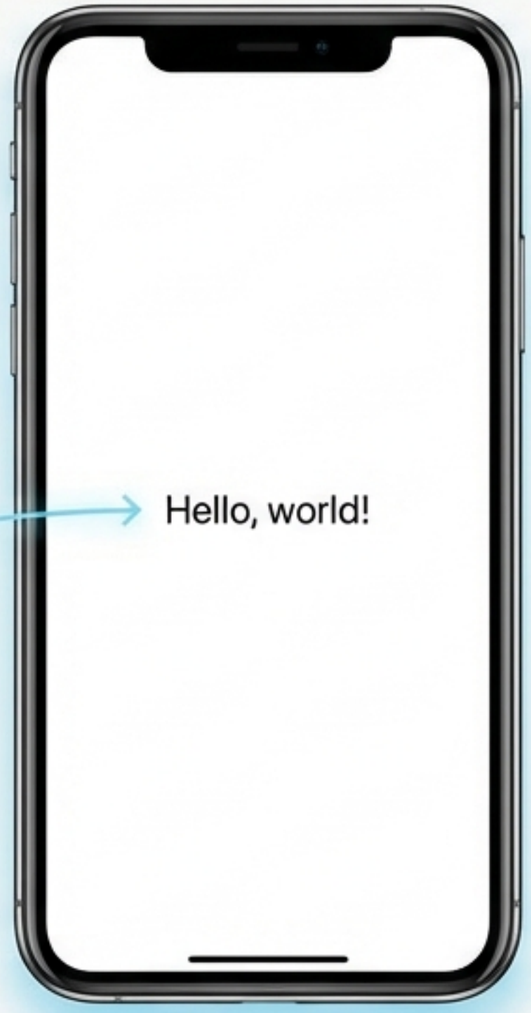

NotebookLM

The Environment: ES6 Imports



React Native ships with ES2015 (ES6) support.

Modern JavaScript features like 'import'.

The fift like 'import', 'const', and arrow functions work out of the box.

NotebookLM

JSX: Writing Markup inside Code

```
import React from 'react';
import {Text, View} from 'react-native';

const HelloWorldApp = () => {
   return (
      <View style={{...}}>
         <Text>Hello, world!</Text>
      </View>
   );
};

export default HelloWorldApp;
```

Similar to


Similar to

JSX looks like HTML, but instead of web tags, you use React Core Components.

NotebookLM

Layout & Style with Flexbox


```
style={{
  flex: 1,
  justifyContent: 'center',
  alignItems: 'center',
}}
```

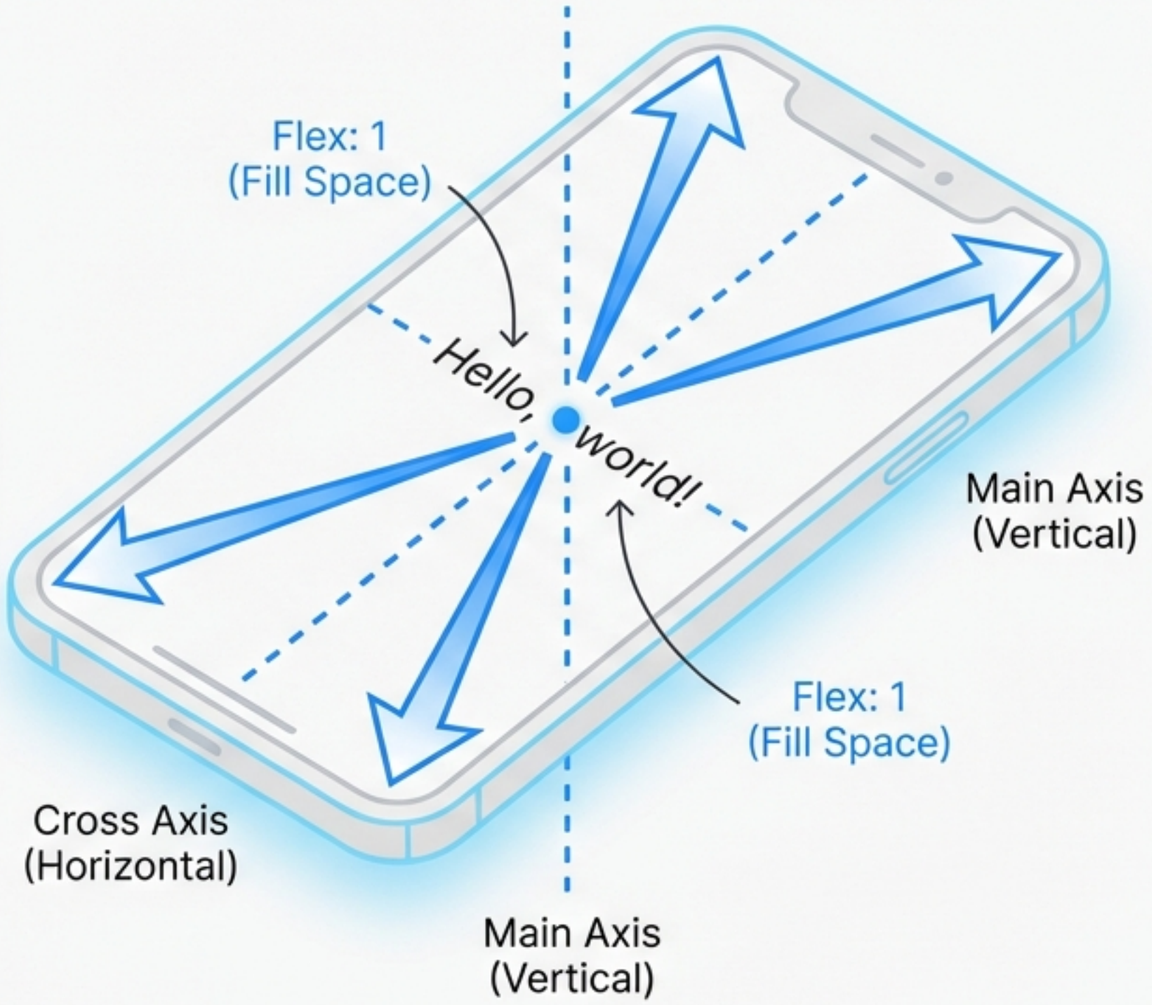

NotebookLM

Props Enable Reusability

Most components can be customized when they are created. These creation parameters are called props.

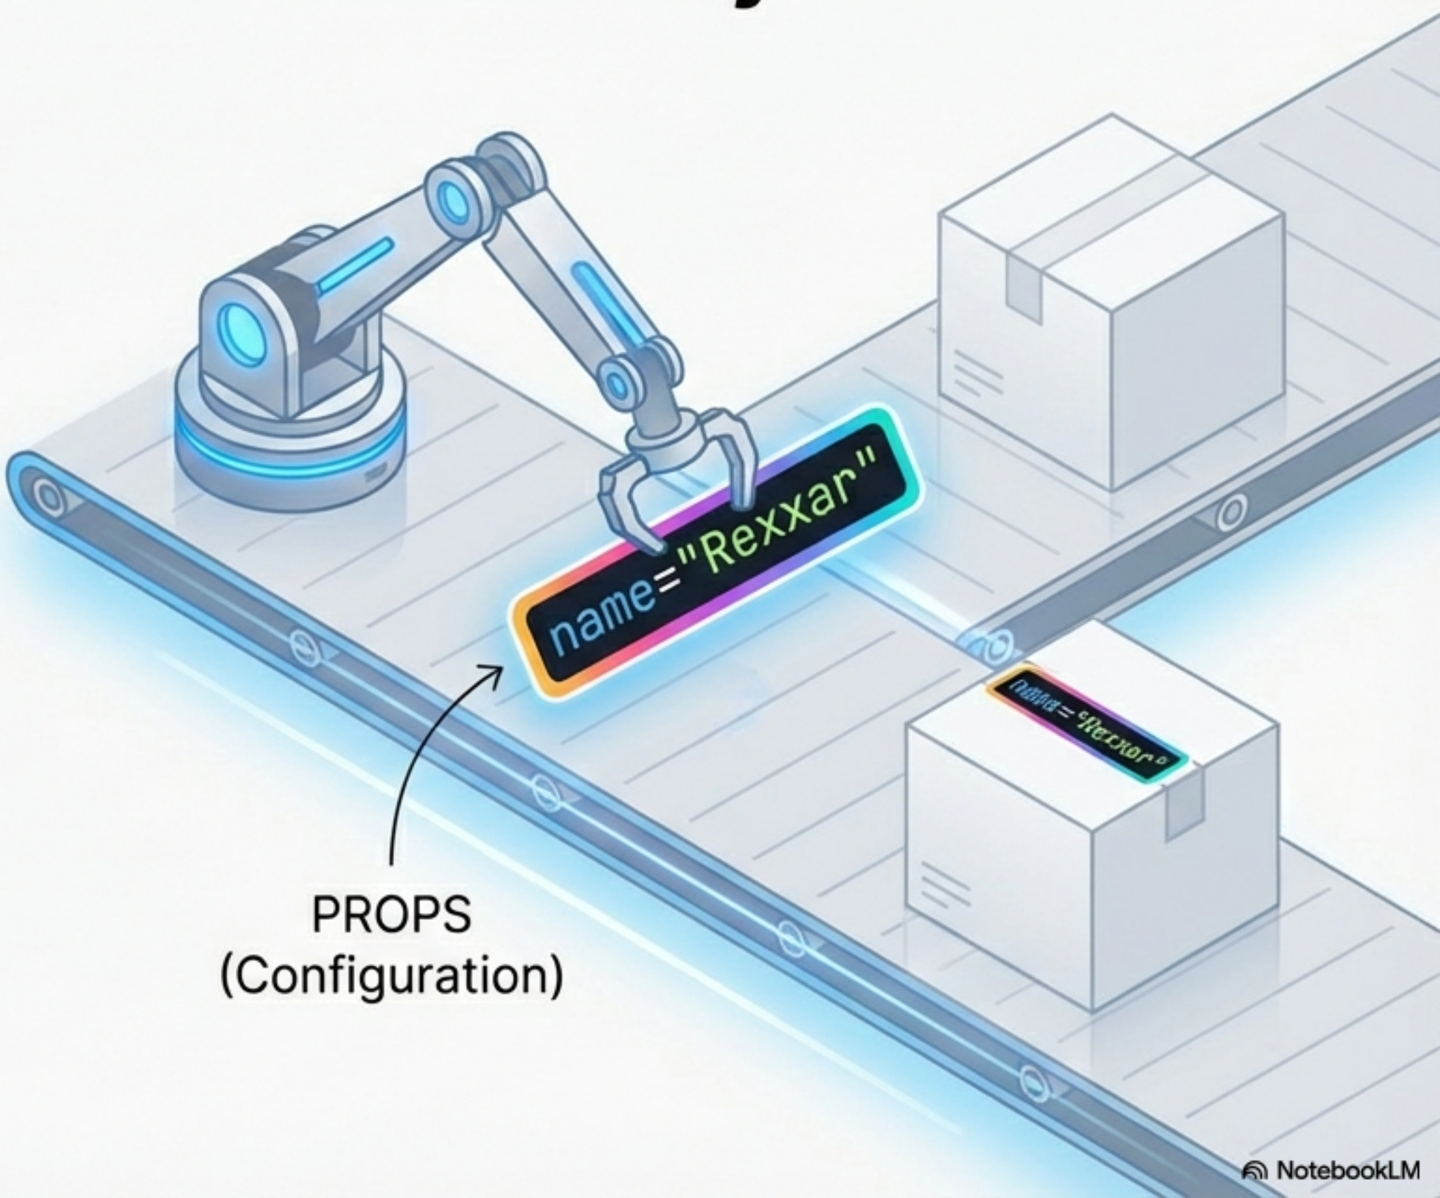

NotebookLM

Customizing Components with Props

```
<Greeting name="Rexxar" />
```





```
const Greeting = (props) => {
  return <Text>Hello {props.name}!</Text>;
};
```

NotebookLM

The Engine of Interactivity: State

Passed from Parent (Read-Only)

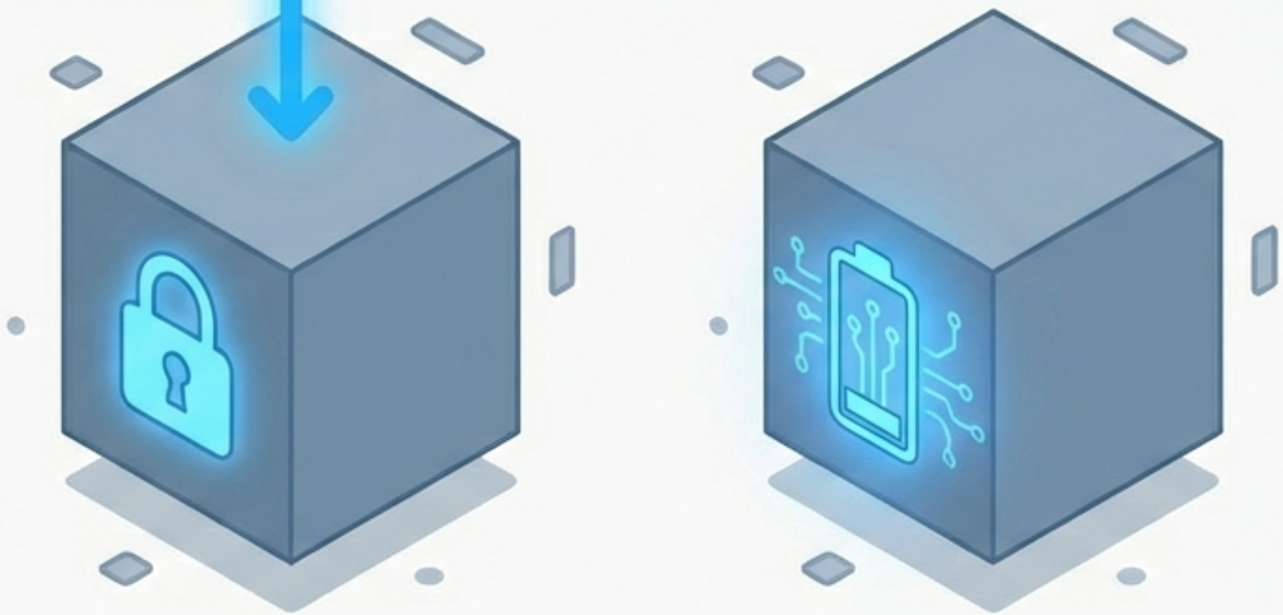

Managed Internally (Changeable)

Unlike props that are read-only, state allows React components to change their output over time.

NotebookLM


State in Action: The Counter

```
class App extends Component {
  state = { count: 0 };

  render() {
    return (
      <Text>
        You clicked {this.state.count} times
      </Text>
    );
  }
}
```

Initializes the internal memory.


Displays current value.

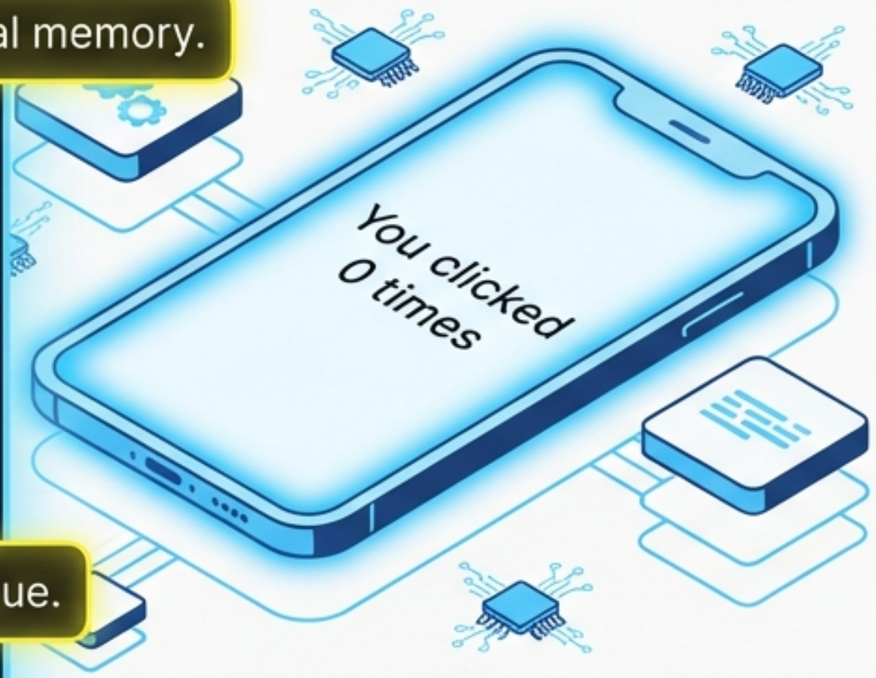

NotebookLM

Triggering Updates with setState


```
onPress = () => {
  this.setState({
    count: this.state.count + 1
  });
};
```

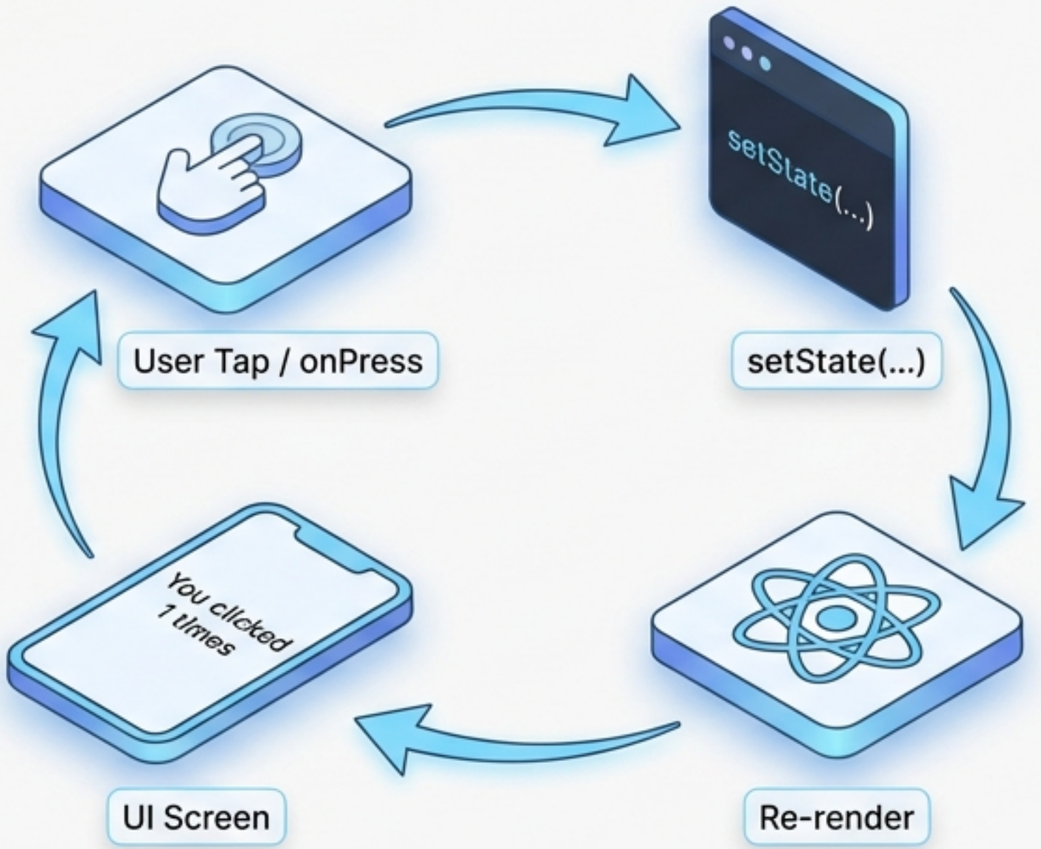

Note: State is not modified directly. We use `setState` to trigger the update.

NotebookLM


Cheat Sheet: Props vs. State

	PROPS	STATE
Role	Configuration 	Internal Management 
Source	Passed from Parent 	Initialized by Component 
Mutability	Read-Only (Immutable) 	Updatable (Mutable via setState) 

There is no difference in handling state between React for Web and React Native.

NotebookLM

From Static to Dynamic

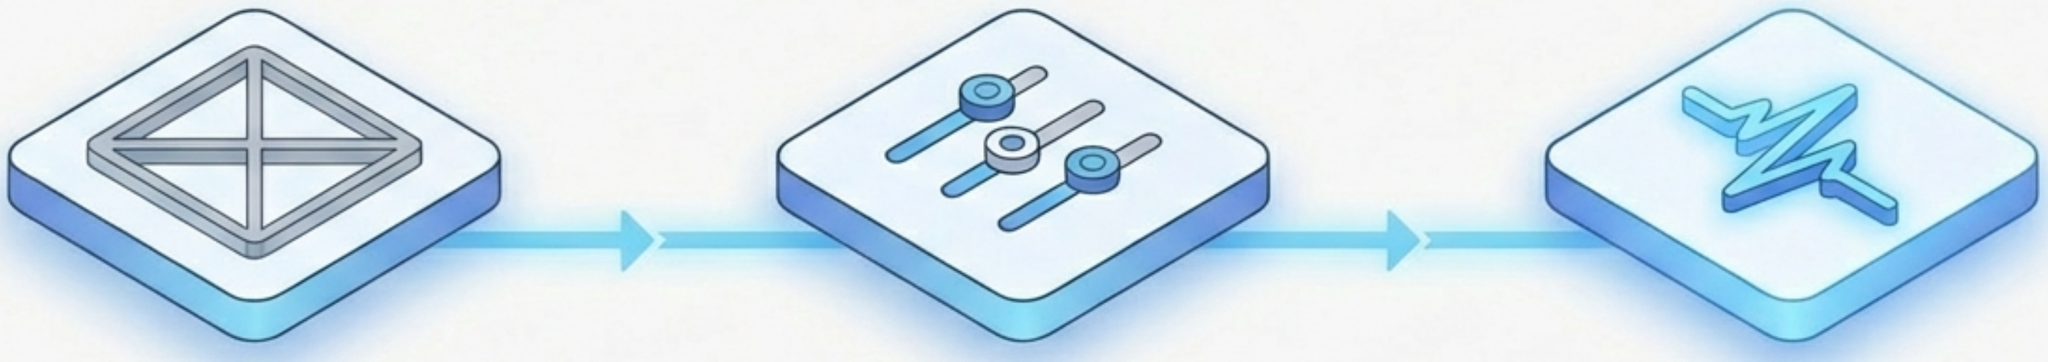

Components (Structure)

Built static screens

Props (Configuration)

Made UI reusable

State (Interactivity)

Handled data changes

With these three building blocks, you have the foundation to build any mobile application.

NotebookLM