Assignment-4

Date	24 October 2022
Name	Surendaranand.P
Roll Number	620119106303
Team ID	PNT2022TMID30898
Project Name	Project – Personal Assistance for seniors
	who are self-reliant

Question:

Write code and connections in wokwi for ultrasonic sensors. That whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images.

Wokwi:

https://wokwi.com/projects/348489538027389522


Code:


```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>
WiFiClient wifiClient;
#define ORG "v17d01"
#define DEVICE_TYPE "assign"
#define DEVICE ID "2022"
#define TOKEN "36912151821"
#define speed 0.034
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Sensor_value/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";
```

```
long duration;
int dist;
void setup()
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
 mqttConnect();
}
void loop() {
  publishData();
  delay(500);
  if (!client.loop()) {
   mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
   while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(1000);
    }
    initManagedDevice();
    Serial.println();
  }
}
void initManagedDevice() {
  if (client.subscribe(topic)) {
     Serial.println(client.subscribe(topic));
   Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
```

```
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin, LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
  if(dist<100){</pre>
    dist=100-dist;
    icon="fa-trash";
  }else{
    dist=0;
    icon="fa-trash-o";
  }
  DynamicJsonDocument doc(1024);
  String payload;
  doc["Name"]=name;
  doc["Latitude"]=lat;
  doc["Longitude"]=lon;
  doc["Icon"]=icon;
  doc["FillPercent"]=dist;
  serializeJson(doc, payload);
  delay(3000);
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  } else {
    Serial.println("Publish FAILED");
  }
}
```

Diagram:



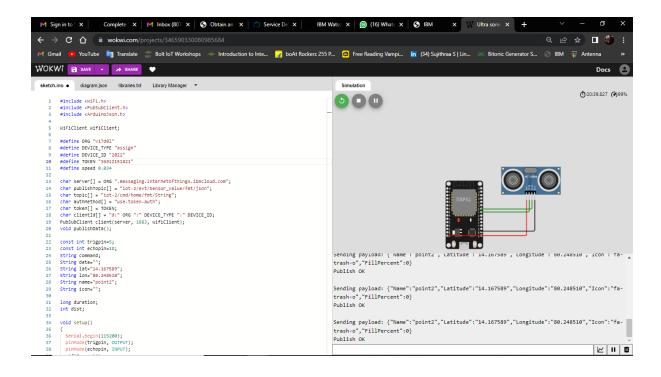

IBM cloud output:

