

#### Assignment- 4

Date	31 October 2022
Team ID	PNT2022TMID12840
Project Name	IoT Based Safety Gadget for Child Safety Monitoring & Notification
Student Name	Hansa Sri
Student Roll Number	717819L215

Write code and connections in wokwi for ultrasonic sensor. Whenever the distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

#### Code

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "639ihg"
#define DEVICE_TYPE "abcd assignment"
#define DEVICE_ID "1917124"
#define TOKEN "6eZCVnv?v9_H@E149y"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/jumli_assignment/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);

const int trigpin=13;
const int echopin=12;
String command;
String data="";

long duration;
float dist;

void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
```

```

    wifiConnect();
    mqttConnect();
}

void loop() {
    bool isNearby = dist < 100;
    digitalWrite(led, isNearby);

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {
    if (client.subscribe(topic)) {
        // Serial.println(client.subscribe(topic));
        Serial.println("IBM subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()

```

```

{
    digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH);
    dist=duration*speed/2;
    if(dist<100){
        String payload = "{\"Alert Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }
    }


    if(dist>100){
        String payload = "{\"Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if(client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }else {
            Serial.println("Publish FAILED");
        }
    }
}
}

```

Screenshots:

Working

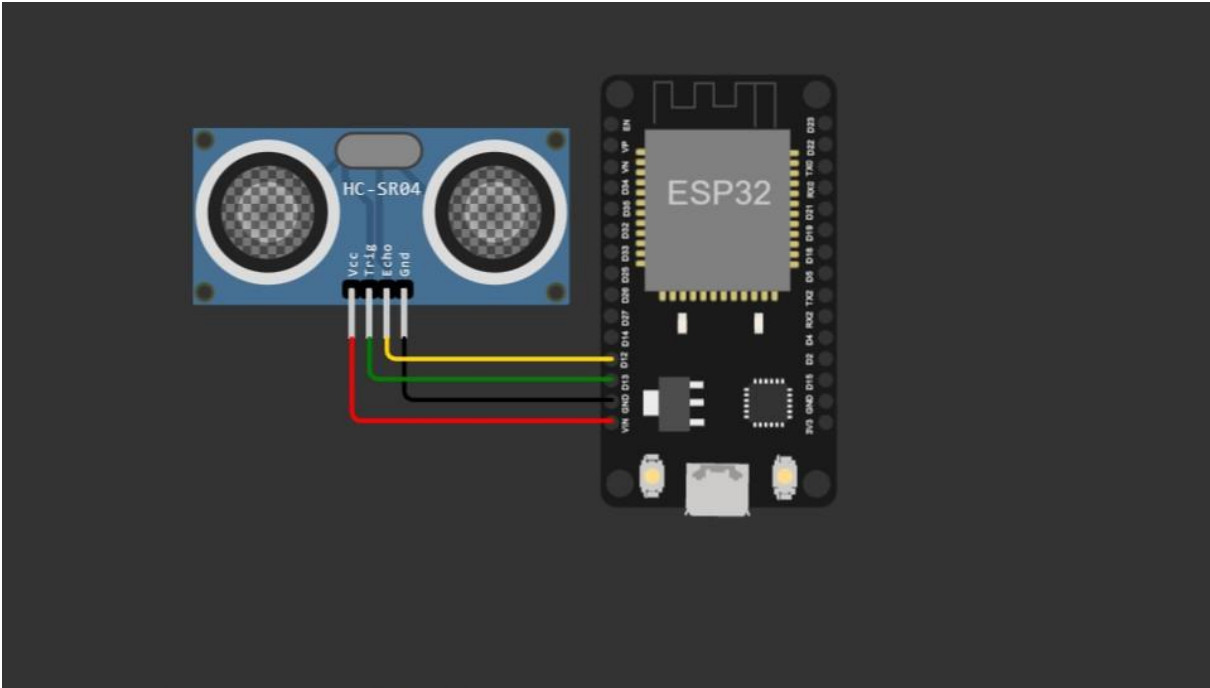

```
Connecting to Wifi..Wifi connected, IP address: 10.10.0.2
Reconnecting MQTT client to 639ihg.messaging.internetofthings.ibmcloud.com
IBM subscribe to cmd OK

Sending payload: {"Distance":400.01}
Publish OK

Sending payload: {"Distance":399.96}
Publish OK
```

IBM

Identity	Device Information	Recent Events	State	Logs
The recent events listed show the live stream of data that is coming and going from this device.				
Event	Value	Format	Last Received	
jumli_assign...	{"Alert Distance":79.97}	json	a few seconds ago	
jumli_assign...	{"Alert Distance":79.97}	json	a few seconds ago	
jumli_assign...	{"Alert Distance":79.97}	json	a few seconds ago	
jumli_assign...	{"Alert Distance":79.97}	json	a few seconds ago	
jumli_assign...	{"Alert Distance":79.97}	json	a few seconds ago	