ASSIGNMENT 4

Date	**29 October 2022**
Reg.no	**110319106035**
Student Name	**Pooja Shree G**

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 CMS send "alert" to IBM cloud and display in device recent events.

CODE:

```
#include <WiFi.h>

#include <PubSubClient.h>

void callback(char* subscribe topic, byte* payload, unsigned int

payloadLength);

//-------credentials of IBM Accounts------

#define ORG "qkg8nh"//IBM ORGANITION ID

#define DEVICE_TYPE "abcd"//Device type mentioned in IBM Watson IOT

Platform #define DEVICE_ID "1234"//Device ID mentioned in IBM Watson IOT

Platform

#define TOKEN "12345678" //Token

String data3;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";

char publishTopic[] = "iot-2/evt/Data/fmt/json";

char subscribetopic[] = "iot-2/cmd/test/fmt/String";

char authMethod[] = "use-token-auth";
char token[] = TOKEN;
```

```
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":"
DEVICE_ID; WiFiClient wifiClient;
PubSubClient client(server, 1883, callback
,wifiClient); const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
```

```
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than
100cms\""; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str()))
{ Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token))
```

```
{ Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
```

```
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength) {
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}
```

SCHEMATIC/CIRCUIT DIAGRAM:

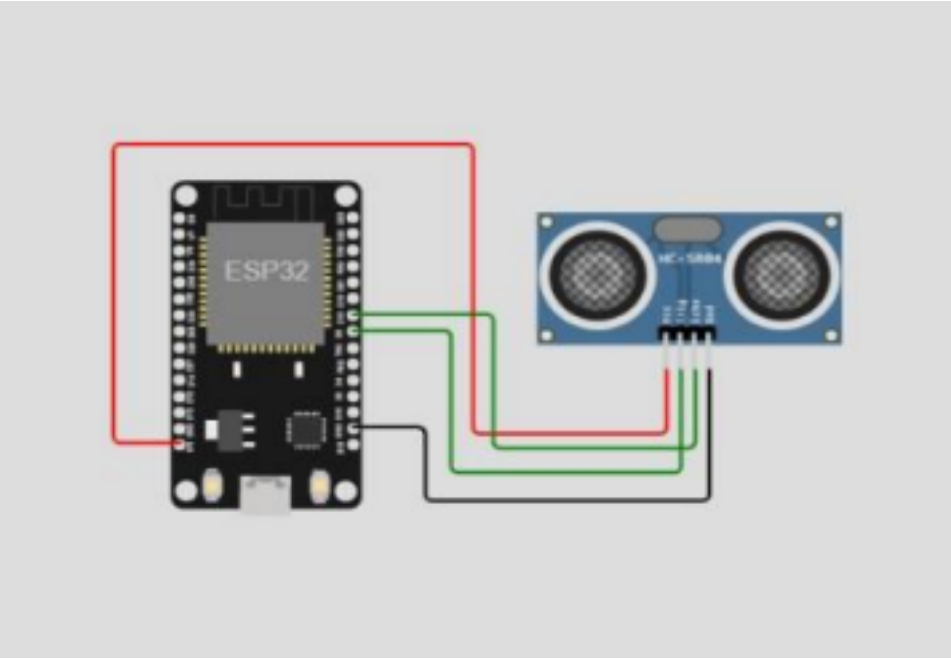

OUTPUT DIAGRAM:

WOKWI LINK:
https://wokwi.com/projects/348561029451481683

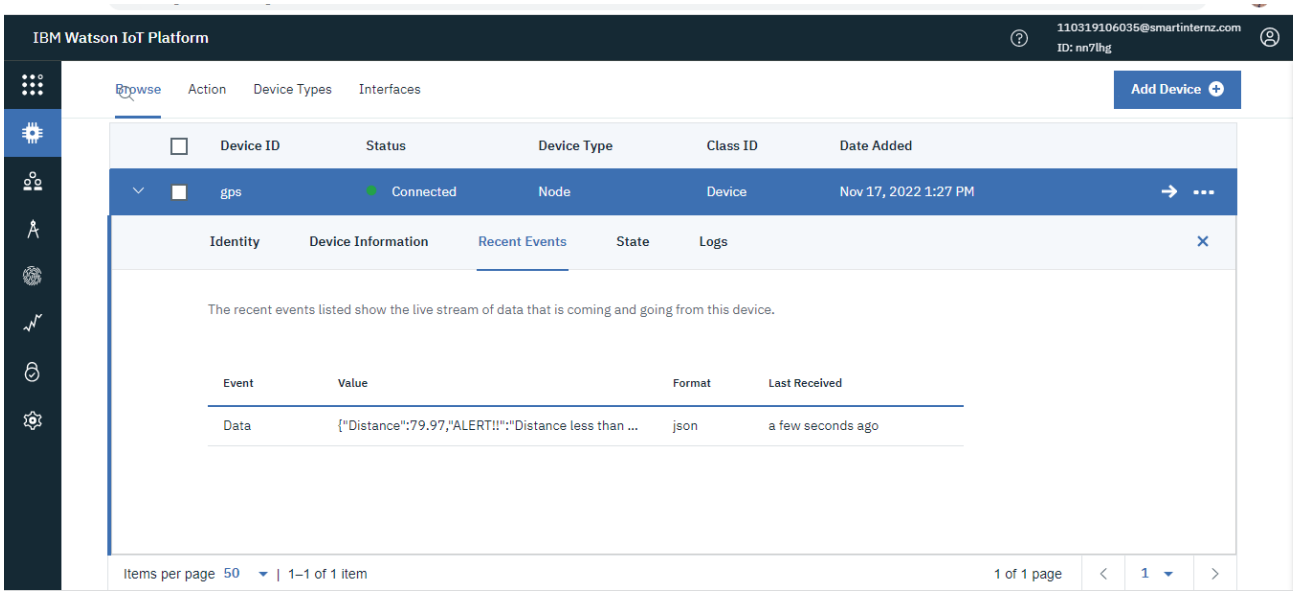
IBM Watson IoT Platform
110319106035@smartinternz.com
ID: nn7lhg
Browse
Action
Device Types
Interfaces
Add Device
Device ID
Status
Device Type
Class ID
Date Added
gps
Connected
Node
Device
Nov 17, 2022 1:27 PM
Identity
Device Information
Recent Events
State
Logs
The recent events listed show the live stream of data that is coming and going from this device.
Event
Value
Format
Last Received
Data
{"Distance":79.97,"ALERT!!":"Distance less than ...
json
a few seconds ago
Items per page 50
1–1 of 1 item
1 of 1 page
1