

Assignment -4

| | |
|-----------------|------------------|
| Assignment Date | 03 NOVEMBER 2022 |
| Student Name | NANDHAKUMAR S |
| TEAM ID | PNT2022TMID01089 |
| Maximum Marks | 2 Marks |

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h> void callback(char* subscribetopic,
byte* payload, unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token String data3; char server[] =
ORG ".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char
subscribetopic[] = "iot-2/cmd/test/fmt/String"; char
authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5; const int echoPin = 18; #define
SOUND_SPEED 0.034 long duration; float distance; void
setup() { Serial.begin(115200); pinMode(trigPin,
```

```

OUTPUT); pinMode(echoPin, INPUT); wificonnect();
mqttconnect(); } void loop() { digitalWrite(trigPin,
LOW); delayMicroseconds(2); digitalWrite(trigPin, HIGH);
delayMicroseconds(10); digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH); distance = duration *
SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!"); delay(1000);
PublishData(distance) ; delay(1000);
if (!client.loop()) { mqttconnect();
} } delay(1000); } void
PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":\""; payload += dist;
payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
} } void mqttconnect() {
if (!client.connected())
{
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".")
; delay(500);
}
}

```

```


initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println(); Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
WL_CONNECTED) { delay(500);
Serial.print(".");
}
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() { if
(client.subscribe(subscribetopic)) {
Serial.println((subscribetopic)); Serial.println("subscribe
to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
} } void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic); for (int i =
0; i < payloadLength; i++) {
//Serial.print((char)payload[i])
; data3 += (char)payload[i];
}
Serial.println("data: "+ data3); data3="";
}

```

Diagram.json:

```
{
  "version": 1,
  "author":
    "sweetysharon",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ], [
    "esp:RX0", "$serialMonitor:TX", "", [] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC"
      , "red",
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
    ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
  ]
}
```

Circuit Diagram:

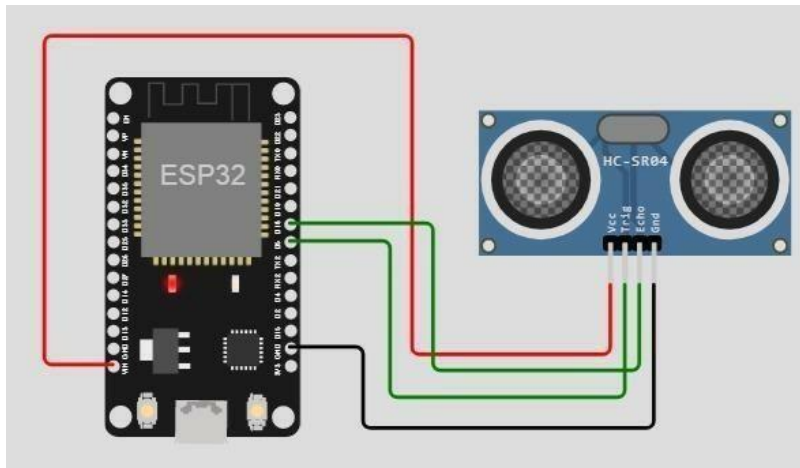

Output:

Wokwi output:

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

IBM cloud output:



Browse

Action

Device Types

Interfaces

Add Device +

Identity

Device Information

Recent Events

State

Logs

X

The recent events listed show the live stream of data that is coming and going from this device.

| Event | Value | Format | Last Received |
|---------|--|--------|-------------------|
| event_1 | {"distance":7,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":9,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":8,"Alert":"Distance less than 10"} | json | a few seconds ago |
| event_1 | {"distance":9,"Alert":"Distance less than 10"} | json | a few seconds ago |