

Assignment-4

Name: Girinath R
Roll no: 2019105531

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>

#define ORG "pbpeli"
#define DEVICE_TYPE "ultra_sonic_sensor"
#define DEVICE_ID "1"
#define TOKEN "vanakkam_chennai"
#define speed 0.034
#define led 14

WiFiClient wifiClient;
String data3;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/vasanth/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long duration;
float dist;

void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
```

```

while (WiFi.status() != WL_CONNECTED) {
  delay(500);
  Serial.print(".");
}
Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin, LOW);
  digitalWrite(trigpin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin, LOW);
  duration=pulseIn(echopin, HIGH);
  dist=duration*speed/2;

  if(dist<100){
    String payload = "{\"Alert Distance\":\"";
    payload += dist;
    payload += "\"}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if(client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Warning crosses 110cm -- it automatically of the loop");
      digitalWrite(led, HIGH);
    }
  }
  if(dist>101 && dist<111){
    String payload = "{\"Normal Distance\":\"";
    payload += dist;
    payload += "\"}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
  }
}


```

```

}
void callback(char* subscribeTopic, byte* payload, unsigned int
payloadLength){
Serial.print("callback invoked for topic:");
Serial.println(subscribeTopic);
for(int i=0; i<payloadLength; i++){
dist += (char)payload[i];
}
Serial.println("data:"+ data3);
if(data3=="lighton"){
Serial.println(data3);
digitalWrite(led,HIGH);
}
data3="";
}

```

Screenshot from wokwi:

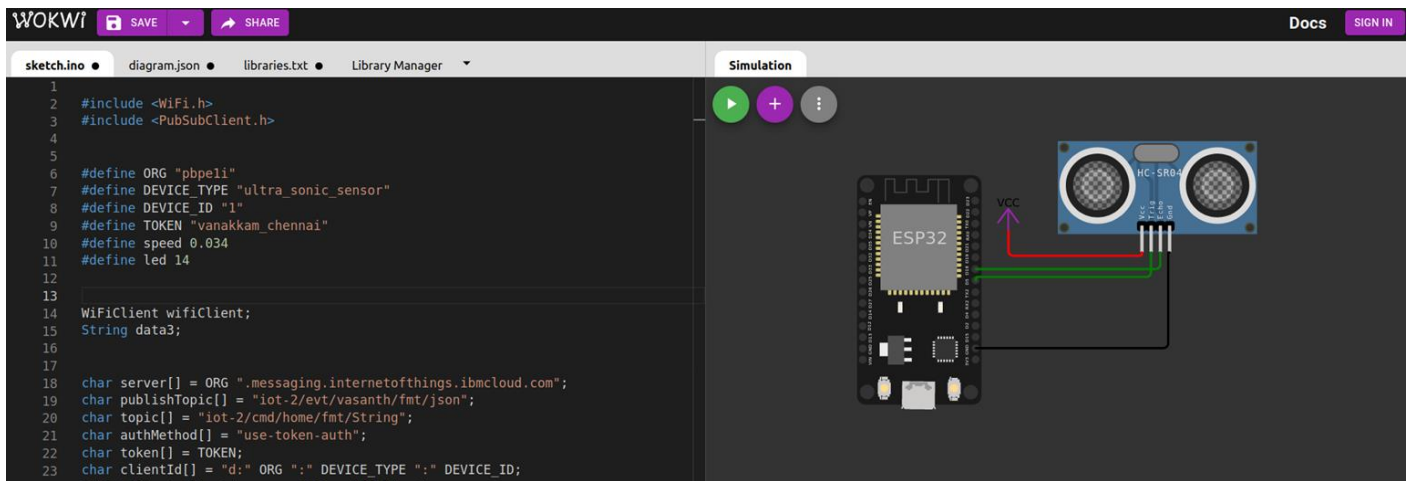

```

Warning crosses 110cm -- it automatically of the loop

Sending payload: {"Alert Distance":72.00}
Warning crosses 110cm -- it automatically of the loop

Sending payload: {"Alert Distance":72.00}
Warning crosses 110cm -- it automatically of the loop

```

Screenshot from IBM Cloud platform:

Browse

Action

Device Types

Interfaces

Add Device +

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
jagan	{"Alert Distance":72}	json	a few seconds ago
jagan	{"Alert Distance":72}	json	a few seconds ago
jagan	{"Alert Distance":72}	json	a few seconds ago
jagan	{"Alert Distance":72}	json	a few seconds ago
jagan	{"Alert Distance":72}	json	a few seconds ago