

Personal Assistance for Seniors Who Are Self-Reliant

Assignment – IV

Name: Karthiga S

RegisterNumber: 92172019104073

E-Mail Id : selvakarthika01@gmail.com

Question : Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events

Code:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT
#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"
Ultrasonic ultrasonic(13, 12);
int distance;
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "64yf7x" //IBM ORGANITION ID
#define DEVICE_TYPE "b11m3edevicetype" //Device type mentioned in ibm watson
IOT Platform
#define DEVICE_ID "b11m3edeviceid" //Device ID mentioned in ibm watson IOT
Platform
#define TOKEN "-&EMtr7l-v-Gz2G))e" //Token
String data3;
float h, t;
//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String"; // cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
```

```

// -----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential
void setup()// configureing the ESP32
{
  Serial.begin(115200);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}
void loop()// Recursive Function
{
  distance = ultrasonic.read(CM);
  if(distance < 100){
    Serial.print("Distance in CM: ");
    Serial.println(distance);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
      mqttconnect();
    }
  }
  delay(1000);
}
/*.....retrieving to
Cloud.                                     */
void PublishData(float temp) {
  mqttconnect();//function call for connecting to ibm
/*
creating the String in in form JSON to update the data to ibm cloud
*/
  String payload = "{\"Alert Distance\":\"";
  payload += temp;
  payload += "\"}";
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud
    then it will print publish ok in Serial monitor or else it will print publish
    failed
  } else {
    Serial.println("Publish failed");
  }
}
void mqttconnect() {

```

```

if (!client.connected()) {
  Serial.print("Reconnecting client to ");
  Serial.println(server);
  while (!client.connect(clientId, authMethod, token)) {
    Serial.print(".");
    delay(500);
  }
  initManagedDevice();
  Serial.println();
}
}

void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish
  the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  if(data3=="lighton")
  {
    Serial.println(data3);
  }
  else


```

```


{
Serial.println(data3);
}
data3="";
}

```

Simulation Output:

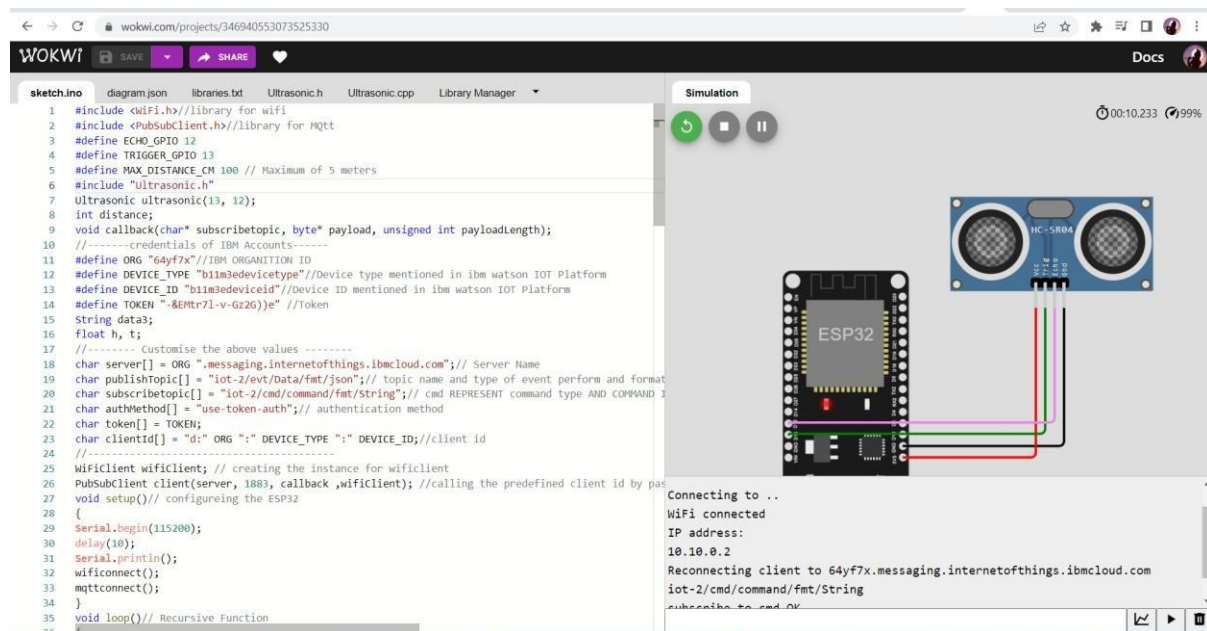

Cloud Output:

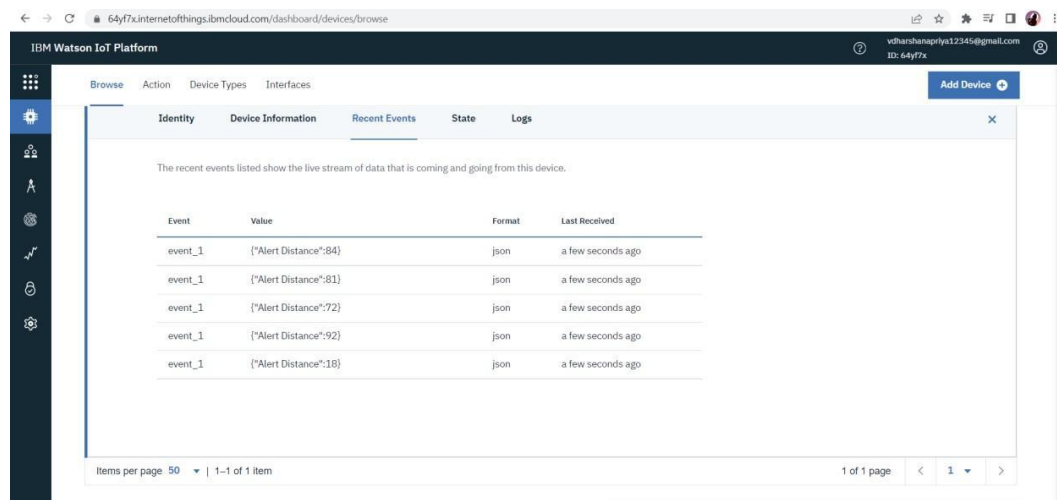

Link:

<https://wokwi.com/projects/346940553073525330>