

#### Assignment -4

Assignment Date	1 NOV 2022
Student Name	Manikandan K
Student Roll Number	721219106025
Maximum Marks	2 Marks

#### Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h> void callback(char* subscribetopic, byte* payload,
unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token String data3; char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char publishTopic[] = "iot-
2/evt/Data/fmt/json"; char subscribetopic[] = "iot-2/cmd/test/fmt/String"; char
authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient); const int
trigPin = 5; const int echoPin = 18; #define SOUND_SPEED 0.034 long
duration; float distance; void setup() { Serial.begin(115200);
```

```

pinMode(trigPin, OUTPUT); pinMode(echoPin, INPUT); wificonnect();
mqttconnect(); } void loop() { digitalWrite(trigPin, LOW);
delayMicroseconds(2); digitalWrite(trigPin, HIGH);
delayMicroseconds(10); digitalWrite(trigPin, LOW); duration =
pulseIn(echoPin, HIGH); distance = duration *
SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance); if(distance<100)
{
Serial.println("ALERT!!"); delay(1000);
PublishData(distance) ; delay(1000); if
(!client.loop()) { mqttconnect();
}} delay(1000); } void
PublishData(float dist)
{ mqttconnect();
String payload = "{\"Distance\": "; payload += dist; payload +=
", \"ALERT!!\": \"\" \"Distance less than 100cms\" \"\"; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}} void mqttconnect() { if
(!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".")
; delay(500);
}
}
initManagedDevice();
Serial.println();
}}

```

```

void wificonnect()
{
  Serial.println(); Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
  WL_CONNECTED) { delay(500);
  Serial.print(".");
}
  Serial.println(""); Serial.println("WiFi connected"); Serial.println("IP
  address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() { if
(client.subscribe(subscribetopic)) {
  Serial.println((subscribetopic)); Serial.println("subscribe to cmd OK");
} else {
  Serial.println("subscribe to cmd FAILED");
}} void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic); for (int i = 0; i <
  payloadLength; i++) { //Serial.print((char)payload[i])
    ; data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3); data3="";
}

```

**Diagram.json:**

```

{
  "version": 1, "author":
  "sweetysharon",


```

```

"editor": "wokwi",
"parts": [
  { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} }, { "type": "wokwi-hc-sr04", "id":
    "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
],
"connections": [
  [ "esp:TX0", "$SerialMonitor:RX", "", [] ], [ "esp:RX0",
    "$SerialMonitor:TX", "", [] ],
  [
    "esp:VIN",
    "ultrasonic1:VCC"
    , "red",
    [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
  ],
  [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
  [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
  [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
]
}

```

**Circuit Diagram:**

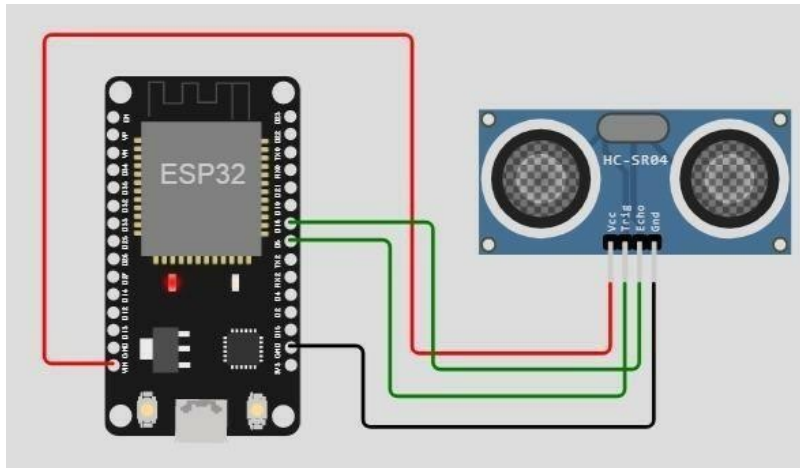

**Output:**  
Wokwi output:

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

**IBM cloud output:**



Identity Device Information Recent Events State Logs X

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago