

## Assignment - 4

### WOKWI STIMULATOR

Assignment Date	25 October 2022
Student Name	Baranivasan P
Student Roll Number	412719104006
Team ID	PNT2022TMID38365
Project	REAL-TIME RIVER WATER QUALITY MONITORING AND CONTROL SYSTEM

#### QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwishare link and images of ibm cloud.

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;
#define ORG "l61y61"
#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
```

```

String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

```

```

}


void initManagedDevice() {
    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}
}

```

## CONNECTIONS:

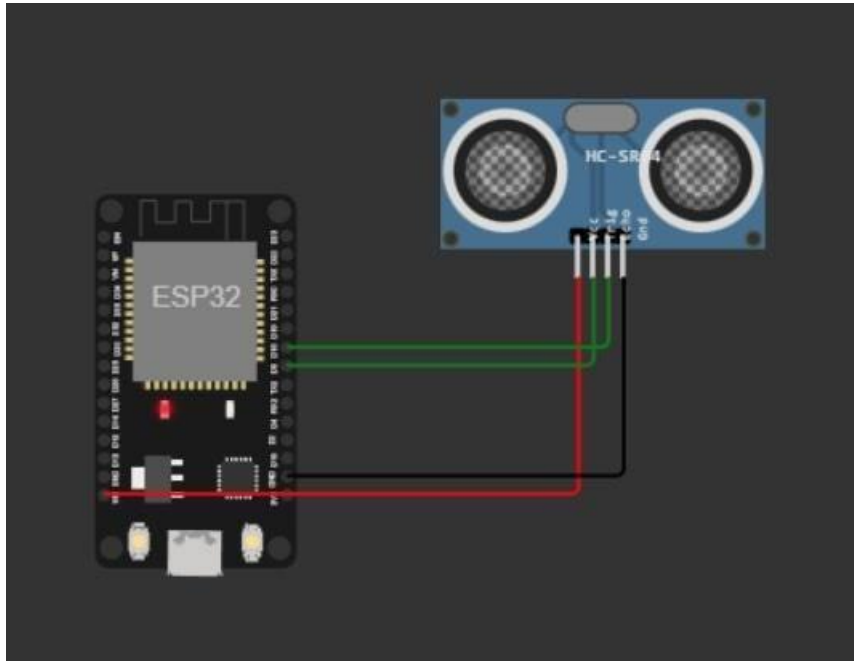

## WOKWI LINK:

<https://wokwi.com/projects/346571062833578578>

## OUTPUT:

WOKWI

SAVE SHARE


Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 #include <wifi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wifiClient;
6
7 #define ORG "161y61"
8 #define DEVICE_TYPE "abcd"
9 #define DEVICE_ID "rasp"
10 #define TOKEN "12345678"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wifiClient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
34 void setup() {
35   //
36 }
```

Simulation

00:20.224

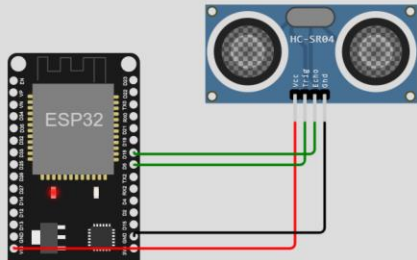

o", "FillPercent":0}  
Publish OK

Sending payload:  
{ "Name": "point2", "Latitude": "14.167589", "Longitude": "80.248510", "Icon": "fa-trash", "FillPercent": 0 }  
Publish OK

IBM Watson IoT Platform

412719104006@smarterintenz.com ID: 61y61

Browse Action Device Types Interfaces

abcd\_1 Connected abcd Device 26 Oct 2022 14:26

Identity Device Information Recent Events State Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"Alert Distance":85}	json	a few seconds ago
event_1	{"Alert Distance":81}	json	a few seconds ago
event_1	{"Alert Distance":100}	json	a few seconds ago
event_1	{"Alert Distance":60}	json	a few seconds ago
event_1	{"Alert Distance":52}	json	a few seconds ago

1 Simulation running