

## Assignment - 4

### WOKWI STIMULATOR

Assignment Date	24 October 2022
Student Name	Subash E
Student Roll Number	412719104034
Team ID	PNT2022TMID38365
Project	REAL-TIME RIVER WATER QUALITY MONITORING AND CONTROL SYSTEM

#### QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "4iwtvj"
#define DEVICE_TYPE "raspberrypi"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/raspberrypi_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
```

```

String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

```

```

}


void initManagedDevice() {
    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}

```

## CONNECTIONS:

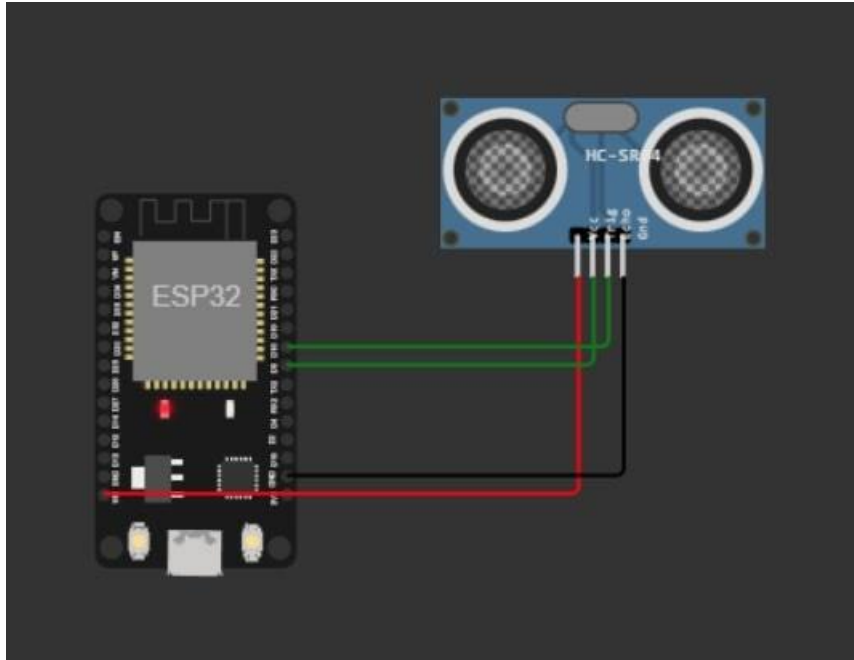

## WOKWI LINK:

<https://wokwi.com/projects/346417473421050451>

# OUTPUT:

**WOKWI** | **SAVE** | **SHARE** | **Docs**

sketch.ino | diagram.json | libraries.txt | Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wificlient;
6
7 #define ORG "4iwtjy"
8 #define DEVICE_TYPE "raspberrypi"
9 #define DEVICE_ID "12345"
10 #define TOKEN "12345678"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/raspberrypi_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wificlient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
34 void setup()
35 {
```

**Simulation** | 00:58.799 | 99%

Connecting to Wifi...Wifi connected, IP address: 10.10.0.2  
Reconnecting MQTT client to 4iwtjy.messaging.internetofthings.ibmcloud.com  
1  
subscribe to cmd OK  
  
Sending payload:

**IBM Watson IoT Platform** | 412719104034@smartinternz.com | ID: 4iwtjy

Browse | Action | Device Types | Interfaces | **Add Device**

raspberrypi\_2 | Connected | raspberrypi | Device | Oct 24, 2022 9:24 PM

**Identity** | **Device Information** | **Recent Events** | **State** | **Logs**

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{*Alert distance*:92}	json	a few seconds ago
event_1	{*Alert distance*:1}	json	a few seconds ago
event_1	{*Alert distance*:31}	json	a minute ago
event_1	{*Alert distance*:34}	json	a minute ago
event_1	{*Alert distance*:69}	json	a minute ago

Items per page 50 | 1-3 of 3 items | 3 Simulations running