

ASSIGNMENT 4

Python programming

Assignment Date	19 th September 2022
Student name	K.Saranya
Student roll number	422719106017
Maximum Mark	2 marks

Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an “Alert” to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h> #include <PubSubClient.h> void callback(char* subscribetopic,
byte* payload, unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
```

```

#define TOKEN "12345678" //Token String data3; char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char publishTopic[] = "iot-
2/evt/Data/fmt/json"; char subscribetopic[] = "iot-2/cmd/test/fmt/String"; char
authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient); const int trigPin
= 5; const int echoPin = 18; #define SOUND_SPEED 0.034 long duration; float
distance; void setup() { Serial.begin(115200); pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT); wificonnect(); mqttconnect(); } void loop() {
digitalWrite(trigPin, LOW); delayMicroseconds(2); digitalWrite(trigPin,
HIGH); delayMicroseconds(10); digitalWrite(trigPin, LOW); duration =
pulseIn(echoPin, HIGH); distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): "); Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!"); delay(1000);

PublishData(distance)
; delay(1000); if
(!client.loop()) {
mqttconnect();
} } delay(1000); } void
PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":\""; payload += dist;
payload += "\",\"ALERT!!\":\"\"Distance less than
100cms\""; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}

```

```

    } } void mqttconnect() {
    if (!client.connected())
    {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token))
        { Serial.print("."); delay(500);
        }
    }
    initManagedDevice();
    Serial.println();
} }
void wificonnect()
{
    Serial.println(); Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
    WL_CONNECTED) { delay(500);
    Serial.print(".");
    }
    Serial.println(""); Serial.println("WiFi
    connected"); Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
    }
    void initManagedDevice() { if
    (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic)); Serial.println("subscribe to
        cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    } } void callback(char* subscribetopic, byte* payload, unsigned int
    payloadLength)
    {
        Serial.print("callback invoked for topic:
        "); Serial.println(subscribetopic); for (int
        i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]); data3 +=
        (char)payload[i];
        }
    }

```

```
Serial.println("data: "+ data3);
data3="";
}
```


Diagram.json:

```
{
  "version": 1,
  "author": "sweetysharon",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [ ] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [ ] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC",
      "red",
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
    ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
  ]
}
```

Wokwi simulation link:

<https://wokwi.com/projects/347230109877404243>

Circuit Diagram:

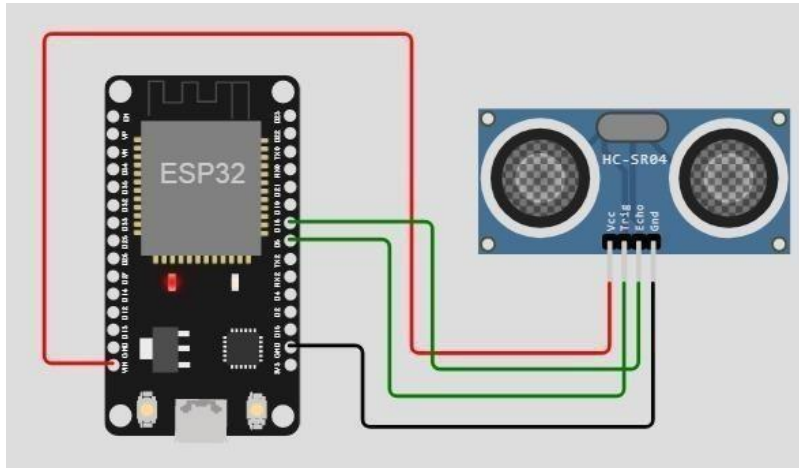

Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

IBM cloud output:



Identity Device Information **Recent Events** State Logs X

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago