

Assignment -4

Internet of Things

Assignment Date	30 October 2022
Student Name	M.Muthu Meenakshi
Student Roll Number	912619104013
Maximum Marks	2 Marks

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud anddisplay in device recent events. Upload document with wokwi share link and images of ibm cloud.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "1bk1kq"
#define DEVICE_TYPE "abcd"
#define DEVICE_ID "rasp"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
```

```
String icon="";  
  
long duration;  
int dist;  
  
void setup()  
{  
    Serial.begin(115200);  
    pinMode(trigpin, OUTPUT);  
    pinMode(echopin, INPUT);  
    wifiConnect();  
    mqttConnect();  
}  
  
void loop() {  
  
    publishData();  
    delay(500);  
  
    if (!client.loop()) {  
        mqttConnect();  
    }  
}  
  
void wifiConnect() {  
    Serial.print("Connecting to "); Serial.print("Wifi");  
    WiFi.begin("Wokwi-GUEST", "", 6);  
    while (WiFi.status() != WL_CONNECTED) {  
        delay(500);  
        Serial.print(".");  
    }  
    Serial.print("WiFi connected, IP address: ");  
    Serial.println(WiFi.localIP());  
}  
  
void mqttConnect() {  
    if (!client.connected()) {  
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);  
        while (!client.connect(clientId, authMethod, token)) {  
            Serial.print(".");  
            delay(1000);  
        }  
        initManagedDevice();  
        Serial.println();  
    }  
}  
  
void initManagedDevice() {
```

```


if (client.subscribe(topic)) {
    Serial.println(client.subscribe(topic));
    Serial.println("subscribe to cmd OK");
} else {
    Serial.println("subscribe to cmd FAILED");
}
}

void publishData()
{
    digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["FillPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}

```

CONNECTIONS:

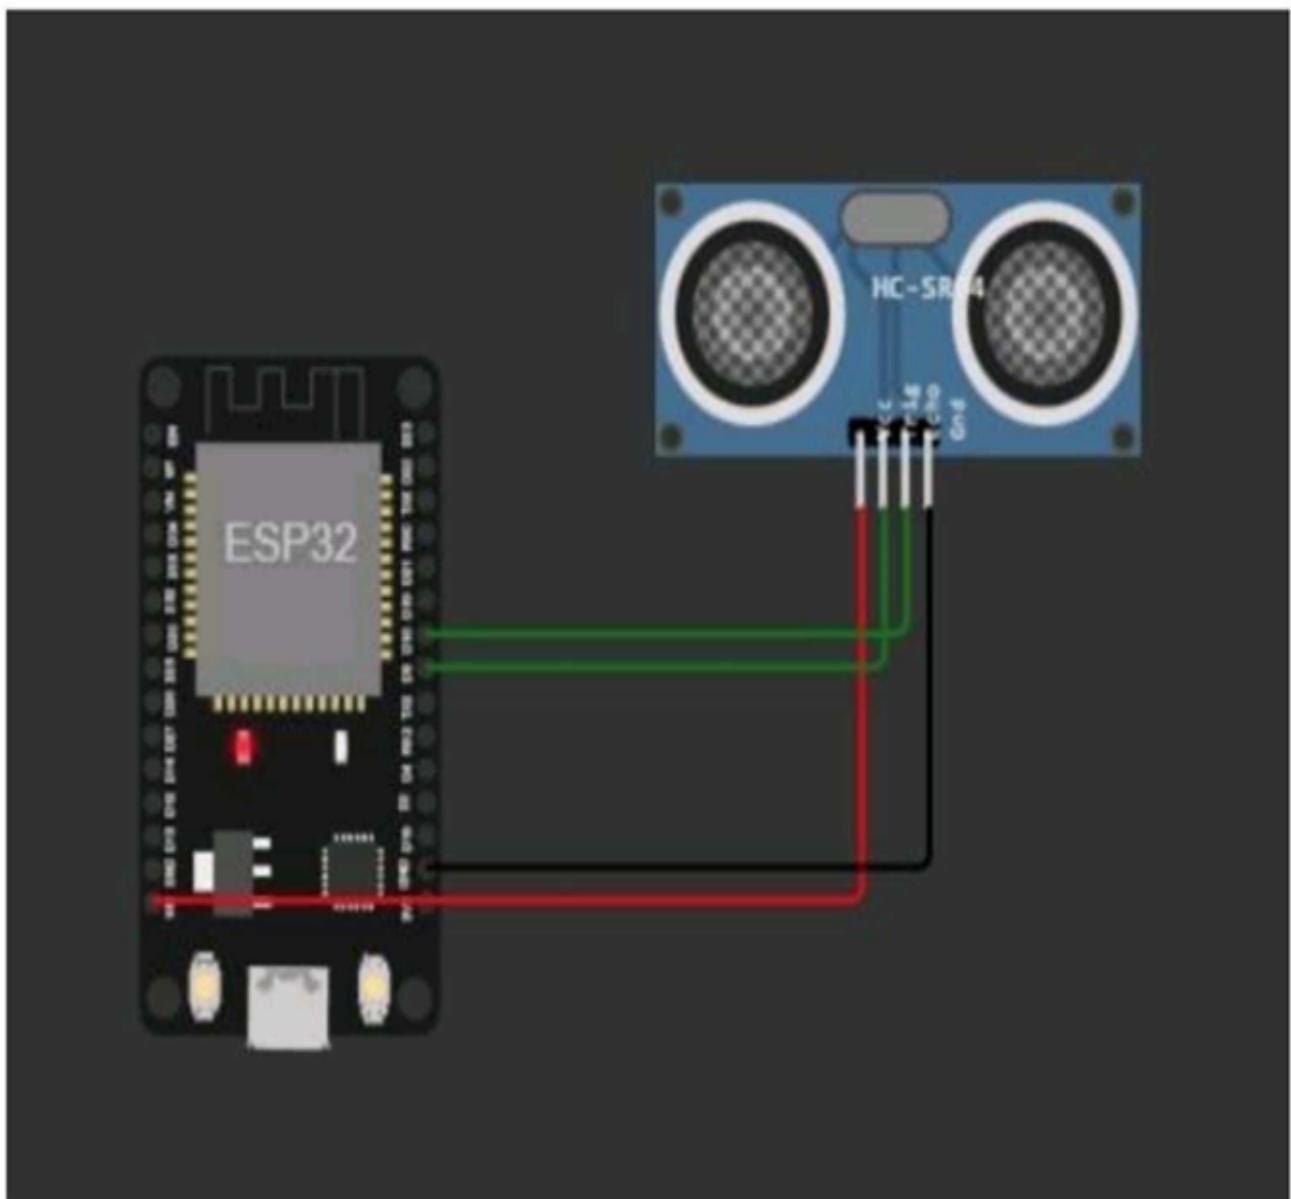

OUTPUT:

WOKWI | SAVE | SHARE | Docs

```

sketch.ino  diagram.json  libraries.txt  Library Manager
1 #include <PubSubClient.h>
2 #include <ArduinoJson.h>
3
4 WiFiClient wifiClient;
5
6 #define ORG "1blk1kq"
7 #define DEVICE_TYPE "abcd"
8 #define DEVICE_ID "rasp"
9 #define TOKEN "12345678"
10 #define speed 0.034
11
12 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
13 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
14 char topic[] = "iot-2/cmd/home/fmt/String";
15 char authMethod[] = "use-token-auth";
16 char token[] = TOKEN;
17 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
18 PubSubClient client(server, 1883, wifiClient);
19 void publishData();
20
21 const int trigpin=5;
22 const int echopin=18;
23 String command;
24 String data="";
25 String lat="14.167589";
26 String lon="80.248510";
27 String name="point2";
28 String icon="";
29
30 long duration;
31 int dist;
32
33 void setup()
34 {
35   Serial.begin(115200);
36 }
```

Simulation | 00:40:678 | 26 October

o","FillPercent":0}
Publish OK

Sending payload:
{ "Name": "point2", "Latitude": "14.167589", "Longitude": "80.248510", "Icon": "fa-trash-o", "FillPercent": 0 }
Publish OK

IBM | Service Details - IBM Cloud | IBM Watson IoT Platform | Ultra sonic sensor copy - Wokwi | +

IBM Watson IoT Platform | 4127191040168 | ID: 1blk1kq | Add

Browse Action Device Types Interfaces

Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
abcd_1	Connected	abcd	Device	Oct 26, 2022 6:53 PM	

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"Alert Distance":83}	json	a few seconds ago
event_1	{"Alert Distance":59}	json	a few seconds ago
event_1	{"Alert Distance":7}	json	a few seconds ago
event_1	{"Alert Distance":30}	json	a few seconds ago
event_1	{"Alert Distance":51}	json	a few seconds ago

