

ASSIGNMENT-4

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned
int
payloadLength);
#define ORG "k4g70k"
#define DEVICE_TYPE "ultrasonic"
#define DEVICE_ID "ultrasonicsensor"
#define TOKEN "12345678"
String data3;
char server[] = ORG
".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
```

```

distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)

{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\": ";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str()))
{
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();

```

```

Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
  delay(500);
  Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");

Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void callback(char* subscribetopic, byte* payload, unsigned
int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++)
  {
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  data3="";
}

```

OUTPUT:


WOKWI SAVE SHARE sketch.ino copy Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 void callback(char* topic, byte* payload, unsigned int
4   payloadLength);
5 #define ORG "k4g70k"
6 #define DEVICE_TYPE "ultrasonic"
7 #define DEVICE_ID "ultrasonicsensor"
8 #define TOKEN "12345678"
9 String data3;
10 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
11 char publishTopic[] = "iot-2/evt/Data/fmt/json";
12 char subscribetopic[] = "iot-2/cmd/test/fmt/String";
13 char authMethod[] = "use-token-auth";
14 char token[] = TOKEN;
15 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
16 WiFiClient wifiClient;
17 PubSubClient client(server, 1883, callback, wifiClient);
18 const int trigPin = 5;
19 const int echoPin = 18;
20 #define SOUND_SPEED 0.034
21 long duration;
22 float distance;
23 void setup() {
24   Serial.begin(115200);
25   pinMode(trigPin, OUTPUT);
26   pinMode(echoPin, INPUT);
27   wifiConnect();
28   mqttConnect();
29 }
30 void loop()
31 ..
```

Simulation

00:22.891 98%

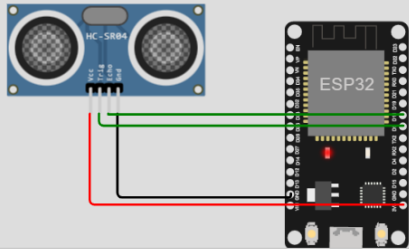

Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.94

Activate Windows
Go to Settings to activate Windows.

WOKWI SHARE LINK

<https://wokwi.com/projects/347934782066262612>