Assignment Date	27 OCT 2022
	Vaishnavi.G
Student Name	
	PNT2022TMID46762
Team id	
Project Title	IoT Based Safety Gadget for Child
	Safety Monitoring and Notification
Maximum Marks	2 marks

ASSIGNMENT 4

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cm s send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.


```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "fepmo6"
#define DEVICE_TYPE "vaishnavi"
#define DEVICE ID "vaishnavi123"
#define TOKEN "12345678"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/vaishnavi/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long duration;
```

```
float dist;
void setup()
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
 wifiConnect();
 mqttConnect();
}
void loop() {
  bool isNearby = dist < 100;</pre>
  digitalWrite(led, isNearby);
  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
 WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL CONNECTED) {
    delay(500);
    Serial.print(".");
  Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to ");
Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    initManagedDevice();
    Serial.println();
  }
}
```


```
void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
  digitalWrite(trigpin, LOW);
  digitalWrite(trigpin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin, LOW);
  duration=pulseIn(echopin, HIGH);
  dist=duration*speed/2;
  if(dist<100){
    String payload = "{\"Alert Distance\":";
    payload += dist;
    payload += "}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
      if(client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Warning crosses 110cm -- it automaticaly of
the loop");
      digitalWrite(led, HIGH);
    }
    if(dist>101 && dist<111){</pre>
    String payload = "{\"Normal Distance\":";
    pavload += dist;
    payload += "}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    }
  }
```


```
void callback(char* subscribeTopic, byte* payload, unsigned int
payloadLength){
  Serial.print("callback invoked for topic:");
  Serial.println(subscribeTopic);
  for(int i=0; i<payloadLength; i++){</pre>
    dist += (char)payload[i];
  Serial.println("data:"+ data3);
  if(data3=="lighton"){
    Serial.println(data3);
    digitalWrite(led,HIGH);
  data3="";
                                                           Docs
   Simulation
                                                      Ö00:26.924 ⊘100%
 Connecting to Wifi..WiFi connected, IP address: 10.10.0.2
 Reconnecting MQTT client to
 fepmo6.messaging.internetofthings.ibmcloud.com
 IBM subscribe to cmd OK
 Sending payload: {"Alert Distance":89.64} Go to Settings to activate Windows.
```

While Distance is greater than 100cm there is no alert message in the IBM cloud.

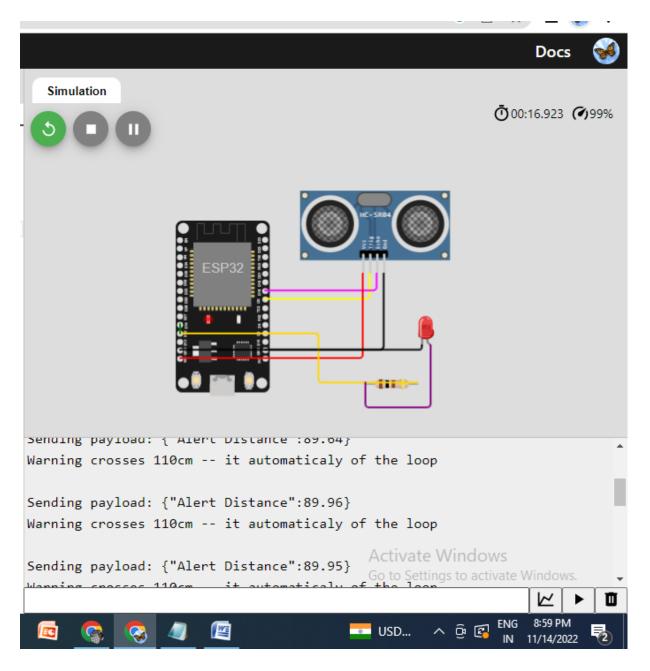

When the distance is less than 100cm alert message will appear in the IBM cloud.

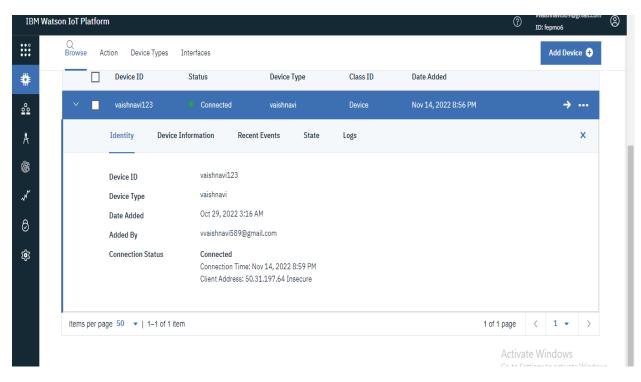

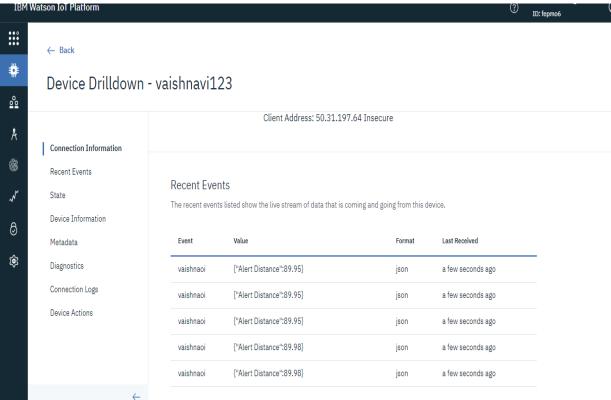

https://wokwi.com/projects/3483677816552 16722