

Assignment - 4

Assignment Date	26.10.2022
Student Name	Ms.L.Rabiya
Student Roll Number	821919104020
Maximum Marks	2 Marks

Question :

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.

Wokwi Link:

<https://wokwi.com/projects/347714816824050258>

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "g4apja"
#define DEVICE_TYPE "Assignment4"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin = 5;
const int echopin = 18;
String command;
String data = "";
long duration;
float dist;
void setup()
{
```

```
Serial.begin(115200);
pinMode(led, OUTPUT);
pinMode(trigpin, OUTPUT);
pinMode(echopin, INPUT);
wifiConnect();
mqttConnect();
}

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);
  publishData();
  delay(500);
  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}
```

```
}  
void mqttConnect() {  
  if (!client.connected()) {  
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);  
    while (!client.connect(clientId, authMethod, token)) {  
      Serial.print(".");  
      delay(500);  
    }  
    initManagedDevice();  
    Serial.println();  
  }  
}  
void initManagedDevice() {  
  if (client.subscribe(topic)) {  
    // Serial.println(client.subscribe(topic));  
    Serial.println("IBM subscribe to cmd OK");  
  } else {  
    Serial.println("subscribe to cmd FAILED");  
  }  
}  
void publishData()  
{  
  digitalWrite(trigpin, LOW);  
  digitalWrite(trigpin, HIGH);  
  delayMicroseconds(10);  
  digitalWrite(trigpin, LOW);  
  duration = pulseIn(echopin, HIGH);
```

```

dist = duration * speed / 2;
if (dist < 100) {
String payload = "{\"Normal Distance\":\"";
payload += dist;
payload += "\"}";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish OK");
}}
if (dist > 101 ) {
String payload = "{\"Alert distance\":\"";
payload += dist;
payload += "\"}";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Warning crosses 110cm -- it automaticaly of the loop"
digitalWrite(led, HIGH);
} else {
Serial.println("Publish FAILED");
}}}


```

```

void callback(char* subscribeTopic, byte* payload, unsigned int payloadLength) {
Serial.print("callback invoked for topic:");
Serial.println(subscribeTopic);
for (int i = 0; i < payloadLength; i++) {
dist += (char)payload[i];
}
Serial.println("data:" + data3);
if (data3 == "lighton") {
Serial.println(data3);
digitalWrite(led, HIGH);
}
data3 = ""; }

```

Circuit Diagram:

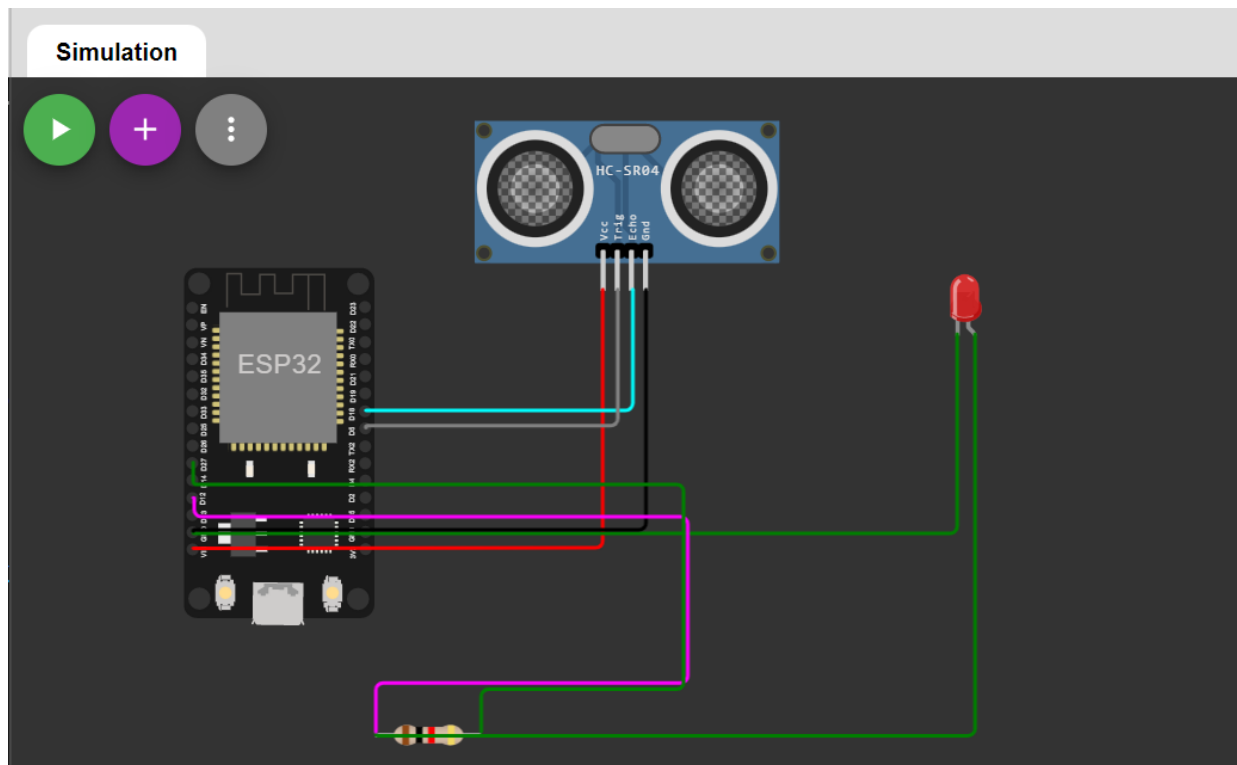

Output:

whatsapp web - Yahoo In... | (2) WhatsApp | wokwi - Yahoo India Search... | esp32-dht22.ino copy - V... | IBM Watson IoT Platform | +

wokwi.com/projects/347714816824050258

New Tab | Google

WOKWI | SAVE | SHARE | esp32-dht22.ino copy | Docs | SIGN IN

esp32-dht22.ino | diagram.json | libraries.txt | Library Manager

```
86  }}
87  if (dist > 101) {
88    String payload = "{\"Alert distance\":\"";
89    payload += dist;
90    payload += "\"}";
91    Serial.print("\n");
92    Serial.print("Sending payload: ");
93    Serial.println(payload);
94    if (client.publish(publishTopic, (char*) payload.c_str())) {
95      Serial.println("Manning crosses 110cm -- it automatically of the lo
96      digitalWrite(led, HIGH);
97    } else {
98      Serial.println("Publish FAILED");
99    }
100  }
101  void callback(char* subscribeTopic, byte* payload, unsigned int pa
102  Serial.print("callback invoked for topic:");
103  Serial.println(subscribeTopic);
104  for (int i = 0; i < payloadLength; i++) {
105    dist += (char)payload[i];
106  }
107  Serial.println("data:" + data3);
108  if (data3 == "lighton") {
109    Serial.println(data3);
110    digitalWrite(led, HIGH);
111  }
112  data3 = "";
```

Simulation

00:42.604 96%

Sending payload: {"Normal Distance":54.94}
Publish OK

Sending payload: {"Normal Distance":54.98}
Publish OK

Sending payload: {"Normal Distance":54.94}
Publish OK

29° | ENG IN | 10:33 | 08-11-2022

whatsapp web - Yahoo In...

(2) WhatsApp

wokwi - Yahoo India Sear...esp32-dht22.ino copy - V...IBM Watson IoT Platform

g4apia.internetofthings.ibmcloud.com/dashboard/devices/browse

New TabGoogle

IBM Watson IoT Platform

821919104020@smartinternz.com
ID: g4apia

BrowseActionDevice TypesInterfaces

Add Device

IdentityDevice InformationRecent EventsStateLogs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
data	{"Normal Distance":54.94}	json	a few seconds ago
data	{"Normal Distance":54.94}	json	a few seconds ago
data	{"Normal Distance":49.96}	json	a few seconds ago
data	{"Normal Distance":35.94}	json	a few seconds ago
data	{"Normal Distance":35.97}	json	a few seconds ago

0 Simulations running

28°

ENG
IN

09:59
08-11-2022