SPRINT-2

SIMULATION CREATION

Date	7 November 2022
Team ID	**PNT2022TMID46939**
Project Name	IoT Based Smart Crop Protection System For Agriculture
Maximum Marks	20 Marks

Wokwi Link:

https://wokwi.com/projects/348742130947064403

Wokwi Stimulation:

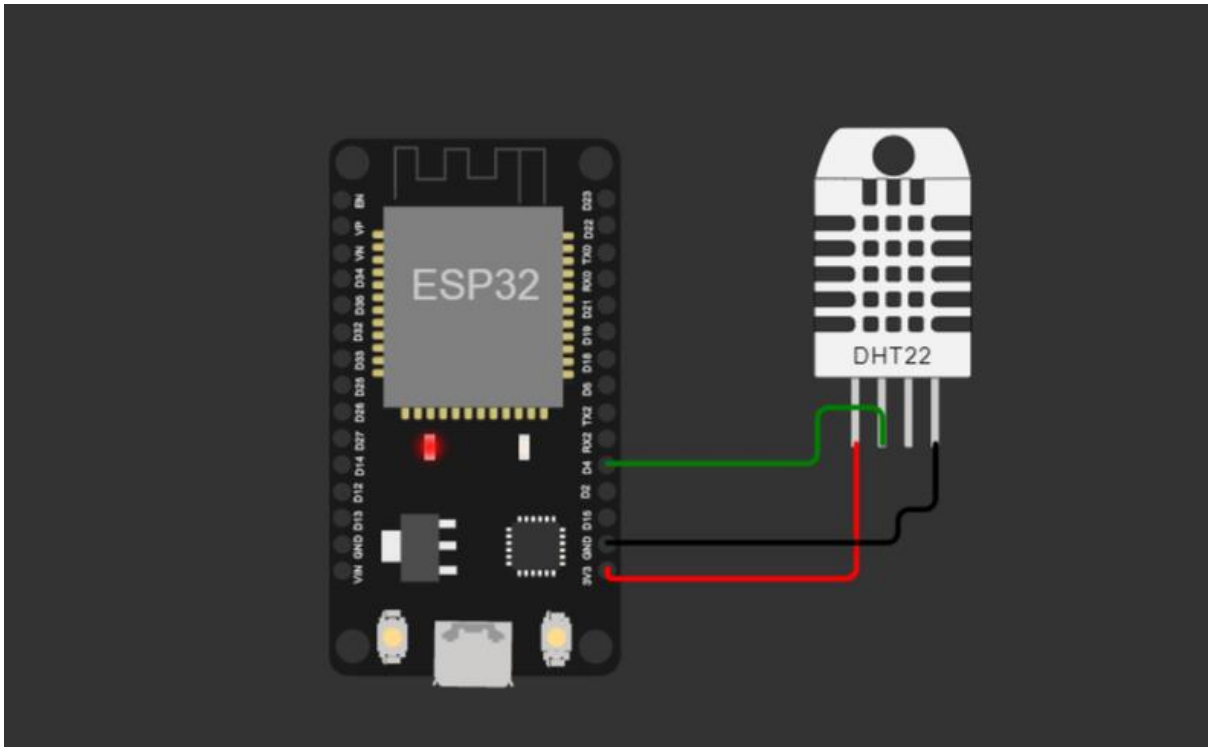

Code:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#include "DHT.h"// Library for dht11
#define DHTPIN 4     // what pin we're connected to
#define DHTTYPE DHT11   // define type of sensor DHT 11
#define LED 5
DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of dht connected

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-------credentials of IBM Accounts------

#define ORG "g4apja"//IBM ORGANITION ID
#define DEVICE_TYPE "r3ibm"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "r123"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678910"     //Token
String data3;
float h, t;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential
void setup()// configureing the ESP32
```

```
{
  Serial.begin(115200);
  dht.begin();
  pinMode(LED,OUTPUT);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

void loop()// Recursive Function
{

  h = dht.readHumidity();
  t = dht.readTemperature();
  Serial.print("temperature:");
  Serial.println(t);
  Serial.print("Humidity:");
  Serial.println(h);

  PublishData(t, h);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}



/*.....................................retrieving to Cloud.............................*/

void PublishData(float temp, float humid) {
  mqttconnect();//function call for connecting to ibm
```

```
  /*
    creating the String in in form JSon to update the data to ibm cloud
  */
  String payload = "{\"temperature\":";
  payload += temp;
  payload += "," "\"humidity\":";
  payload += humid;
  payload += "}";


  Serial.print("Sending payload: ");
  Serial.println(payload);


  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print
  } else {
    Serial.println("Publish failed");
  }

}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }

    initManagedDevice();
    Serial.println();
```

```
    }
  }
  void wificonnect() //function defination for wificonnect
  {
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
    while (WiFi.status() != WL_CONNECTED) {
      delay(500);
      Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
  }

  void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
      Serial.println((subscribetopic));
      Serial.println("subscribe to cmd OK");
    } else {
      Serial.println("subscribe to cmd FAILED");
    }
  }

  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
  {

    Serial.print("callback invoked for topic: ");
```

```
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }

  Serial.println("data: "+ data3);
  if(data3=="lighton")
  {
Serial.println(data3);
digitalWrite(LED,HIGH);

  }

  else
  {
Serial.println(data3);
digitalWrite(LED,LOW);

  }
data3="";


}
```