

Assignment 4

QUESTION:

Write code and connections in wokwi for ultrasonic sensor.
Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.
Upload document with wokwi share link and images of ibm cloud

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "3yngbh"
#define DEVICE_TYPE "Assignment"
#define DEVICE_ID "1234"
#define TOKEN "234567890"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
```

```
const int trigpin=5;
const int echopin=18;
String command;
String data="";
```

```
long duration;
float dist;
```

```
void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
```

```

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
  dist=duration*speed/2;
}

```

```

if(dist<100){
  String payload = "{\"Alert Distance\":\"";
  payload += dist;
  payload += "\"}";


  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  }
}

if(dist>100){
  String payload = "{\"Distance\":\"";
  payload += dist;
  payload += "\"}";

  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if(client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  }else {
    Serial.println("Publish FAILED");
  }
}
}
}

```

CIRCUIT

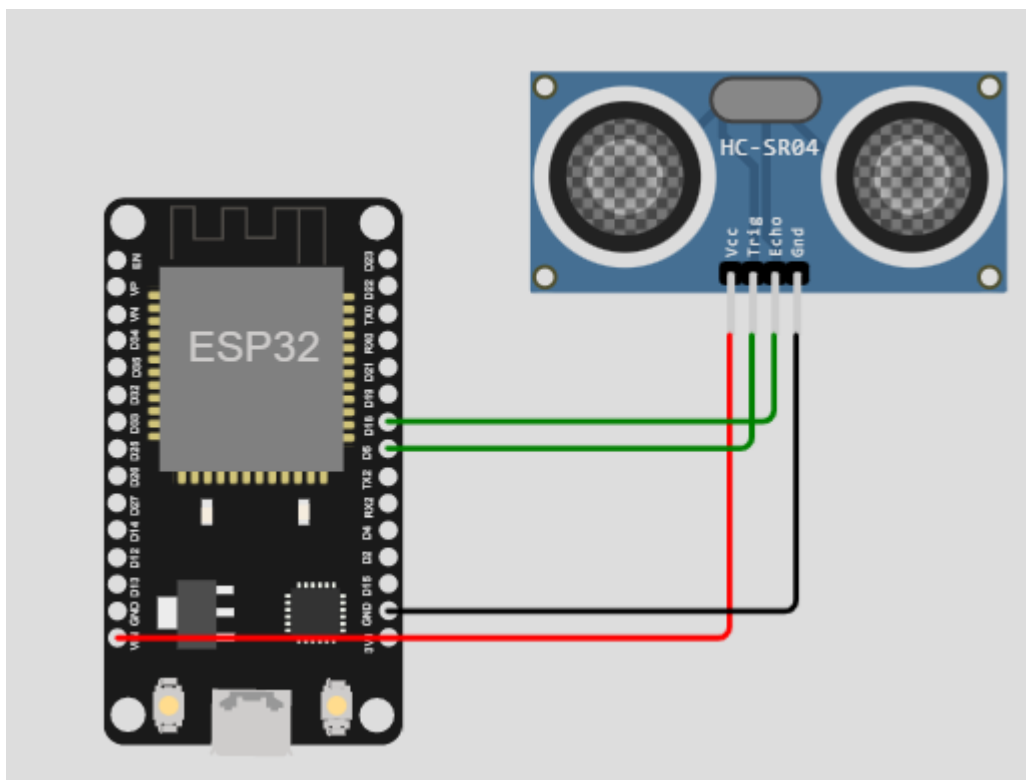

CIRCUIT OUTPUT

```
Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK

Sending payload: {"Alert distance":93.96}
Publish OK
```

CLOUD RESPONDED IMAGE

Event	Value	Format	Last Refreshed
Data	{"Alert distance":93.96}	json	a few seconds ago
Data	{"Alert distance":93.96}	json	a few seconds ago
Data	{"Alert distance":93.96}	json	a few seconds ago
Data	{"Alert distance":93.96}	json	a few seconds ago
Data	{"Alert distance":93.96}	json	a few seconds ago

R.AKASH

961819106005

PONJESLY COLLEGE OF ENGINEERING

TEAM ID : PNT2022TMID34495