

**Assignment -4**  
ESP32 Programming with IBM Cloud

Assignment Date	24 October 2022
Student Name	Kabilan P
Student Roll Number	2019504533
Maximum Marks	2 Marks

**Question:**

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send “alert” to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud.

**Code:**

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT

#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"

Ultrasonic ultrasonic(13, 12);
int distance;

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "jw3q7o" //IBM ORGANITION ID
#define DEVICE_TYPE "ESP32" //Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "95008" //Device ID mentioned in ibm watson IOT
Platform
#define TOKEN "95008400" //Token
String data3;
float h, t;
```

```
//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server
Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event
perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id

// _____
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined
client id by passing parameter like server id,portand wificredential

void setup()// configuring the ESP32
{
  Serial.begin(115200);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

void loop()// Recursive Function
{
  distance = ultrasonic.read(CM);
  if(distance < 100){
    Serial.print("Distance in CM: ");
    Serial.println(distance);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
      mqttconnect();
    }
  }

  delay(1000);
}
```

```
}
```

```
/*.....retrieving to Cloud .....*/
```

```
void PublishData(float temp) {  
  mqttconnect();//function call for connecting to ibm  
  /*  
    creating the String in in form JSon to update the data to ibm cloud  
  */
```

```
  String payload = "{\"Alert Distance\":\"";  
  payload += temp;  
  payload += "}";
```

```
  Serial.print("Sending payload: ");  
  Serial.println(payload);
```

```
  if (client.publish(publishTopic, (char*) payload.c_str())) {  
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it  
    will print publish ok in Serial monitor or else it will print publish failed  
  } else {  
    Serial.println("Publish failed");  
  }
```

```
}
```

```
void mqttconnect() {  
  if (!client.connected()) {  
    Serial.print("Reconnecting client to ");  
    Serial.println(server);  
    while (!client.connect(clientId, authMethod, token)) {  
      Serial.print(".");  
      delay(500);  
    }
```

```
    initManagedDevice();
```

```
    Serial.println();
```

```
  }
```

```
}
```

```
void wificonnect() //function defination for wificonnect  
{
```

```
Serial.println();
Serial.print("Connecting to ");
```

WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection

```
while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
```

```
void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}
```

```
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
```


```
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: " + data3);
    if(data3=="lighton")
    {
        Serial.println(data3);
    }
    else
    {
        Serial.println(data3);
    }
    data3="";
}
```

}

## Wokwi Link:

<https://wokwi.com/projects/347194878315201106>

## Output:

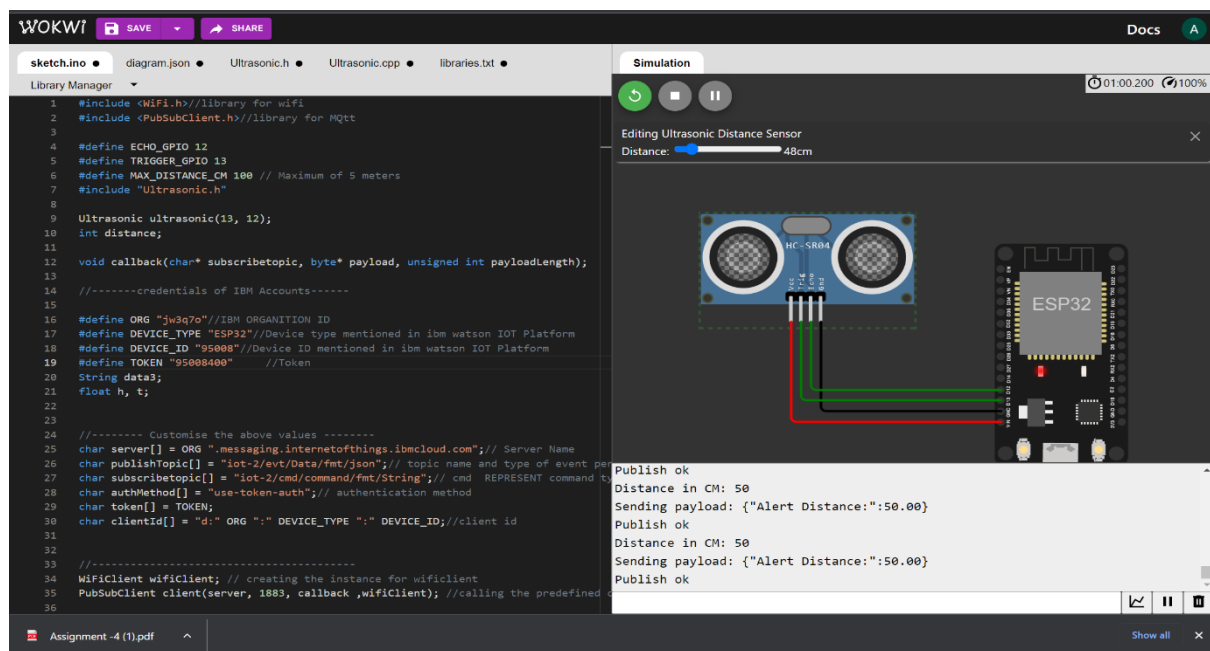

Identity	Device Information	Recent Events	State	Logs
The recent events listed show the live stream of data that is coming and going from this device.				
Event	Value	Format	Last Received	
Data	{"Alert Distance":50}	json	a few seconds ago	
Data	{"Alert Distance":50}	json	a few seconds ago	
Data	{"Alert Distance":21}	json	a few seconds ago	
Data	{"Alert Distance":21}	json	a few seconds ago	
Data	{"Alert Distance":48}	json	a few seconds ago	