Assignment 4

Assignment Date	29 th October 2022
Student Name	Poornesh.S
Roll number	2019504559
Maximum Marks	2 Marks

Question

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.


Code


```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"
Ultrasonic ultrasonic(13, 12);
int distance;
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
#define ORG "brn0h9"//IBM ORGANITION ID
#define DEVICE_TYPE "esp32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "2019504559"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "3y+c(0+WF_FuWAoDDJ" //Token
String data3;
float h, t;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id, portand
wificredential
void setup()// configureing the ESP32
Serial.begin(115200);
delay(10);
Serial.println();
```

```
wificonnect();
mqttconnect();
void loop()// Recursive Function
distance = ultrasonic.read(CM);
if(distance < 100){</pre>
Serial.print("Distance in CM: ");
Serial.println(distance);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
      .....retrieving to
void PublishData(float temp) {
mqttconnect();//function call for connecting to ibm
creating the String in in form JSon to update the data to ibm cloud
String payload = "{\"Alert Distance:\":";
payload += temp;
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");// if it sucessfully upload data on the cloud
failed
} else {
Serial.println("Publish failed");
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
initManagedDevice();
Serial.println();
void wificonnect() //function defination for wificonnect
```

```
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {</pre>
data3 += (char)payload[i];
Serial.println("data: "+ data3);
if(data3=="lighton")
Serial.println(data3);
else
Serial.println(data3);
data3="";
```

Simulation output

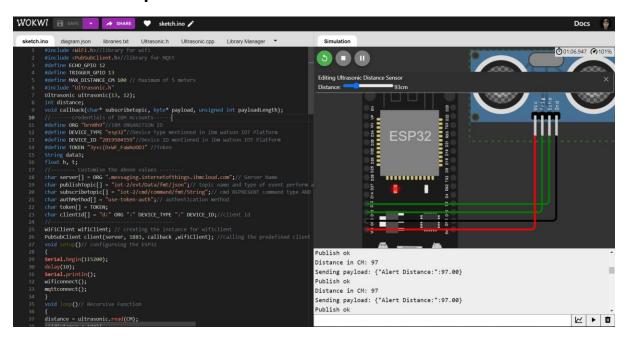

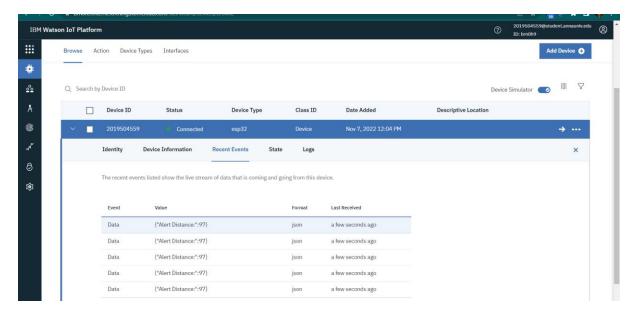

Project link

https://wokwi.com/projects/347649544295547475