

Assignment 4

Assignment Date	29 th October 2022
Student Name	J CHARU SRI
Roll number	2019504512
Maximum Marks	2 Marks

Question

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send “alert” to IBM cloud and display in device recent events. Upload document with wokwi share link and images of IBM cloud.

Code

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT
#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"
Ultrasonic ultrasonic(13, 12);
int distance;
void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "o4tfyj" //IBM ORGANITION ID
#define DEVICE_TYPE "ESP32" //Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "252219" //Device ID mentioned in ibm watson IOT Platform
#define TOKEN "X8*2r01NJsG6HVG-Z9" //Token
String data3;
float h, t;
//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in
which data to be send
char subscribtopic[] = "iot-2/cmd/command/fmt/String"; // cmd REPRESENT command type AND
COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by passing
parameter like server id, port and wificredential
void setup() // configureing the ESP32
{
  Serial.begin(115200);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}
```

```

}
void loop()// Recursive Function
{
distance = ultrasonic.read(CM);
if(distance < 100){
Serial.print("Distance in CM: ");
Serial.println(distance);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
/*.....retrieving to Cloud.....*/
void PublishData(float temp) {
mqttconnect();//function call for connecting to ibm
/*
creating the String in in form JSon to update the data to ibm cloud
*/
String payload = "{\"Alert Distance\":\"";
payload += temp;
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in
Serial monitor or else it will print publish failed
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect() //function defination for wificonnect
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
while (WiFi.status() != WL_CONNECTED) {


```

```

delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: " + data3);
if(data3=="lighton")
{
Serial.println(data3);
}
else
{
Serial.println(data3);
}
data3="";
}

```

Simulation output

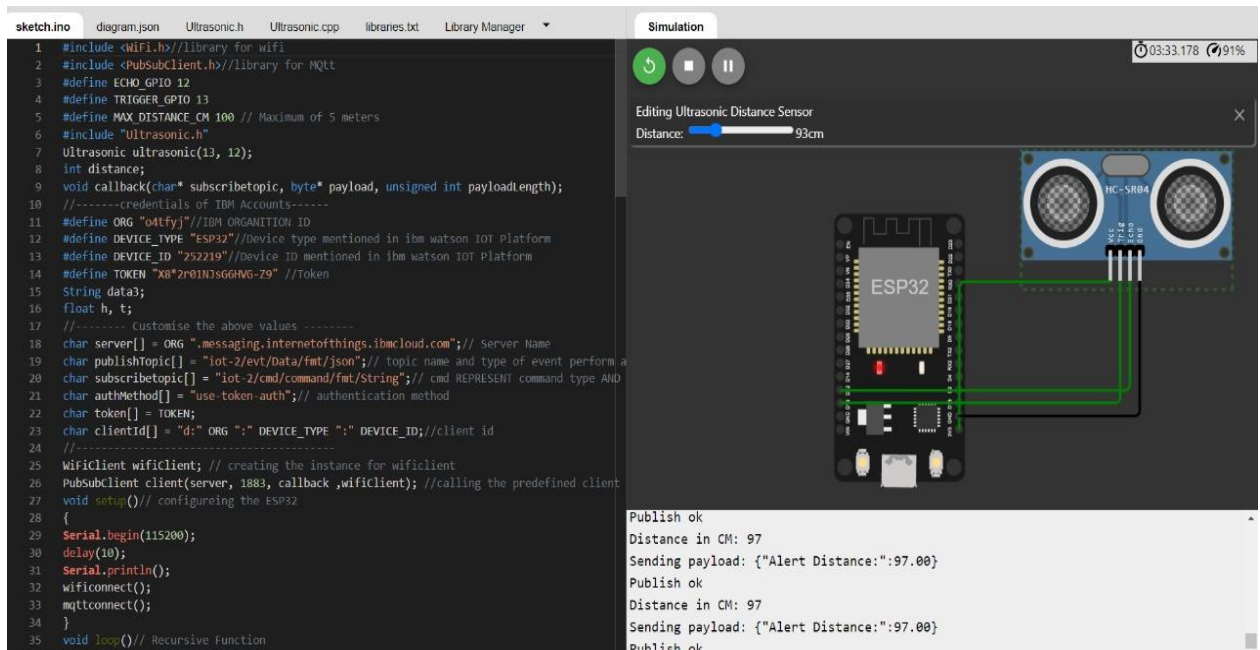

Device Drilldown - 252219

Connection Information	Recent Events
Recent Events	The recent events listed show the live stream of data that is coming and going from this device.
State	
Device Information	
Metadata	
Diagnostics	
Connection Logs	
Device Actions	

Event	Value	Format	Last Received
Data	{"Alert Distance":97}	json	a few seconds ago
Data	{"Alert Distance":97}	json	a few seconds ago
Data	{"Alert Distance":97}	json	a few seconds ago
Data	{"Alert Distance":97}	json	a few seconds ago
Data	{"Alert Distance":97}	json	a few seconds ago

Project link

<https://wokwi.com/projects/348234599030063698>