

ASSIGNMENT-4

DISTANCE DETECTION USING ULTRASONIC SENSOR

Date	20 October 2022
Team ID	PNT2022TMID11112
Name	Srilalitha.R
Student Roll Number	811519106145
Maximum Marks	2 Marks

Question1 :

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK :

<https://wokwi.com/projects/346666873885033042>

CODE :

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)ZSegYk&Rr" //Token
13 String data3;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribetopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

```

36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      | creating the String in in form JSon to update the data to ibm cloud

```

```

70 |   creating the String in in form JSON to update the data to ibm cloud
71 | */
72 String object;
73 if (dist <100)
74 {
75     digitalWrite(LED,HIGH);
76     Serial.println("object is near");
77     object = "Near";
78 }
79 else
80 {
81     digitalWrite(LED,LOW);
82     Serial.println("no object found");
83     object = "No";
84 }
85
86 String payload = "{\"distance\":";
87 payload += dist;
88 payload += "," " \"object\":\":";
89 payload += object;
90 payload += "\}";
91
92
93 Serial.print("Sending payload: ");
94 Serial.println(payload);
95
96
97
98

```

```

98
99 if (client.publish(publishTopic, (char*) payload.c_str())) {
100     Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101 } else {
102     Serial.println("Publish failed");
103 }
104
105 }
106 void mqttconnect() {
107     if (!client.connected()) {
108         Serial.print("Reconnecting client to ");
109         Serial.println(server);
110         while (!client.connect(clientId, authMethod, token)) {
111             Serial.print(".");
112             delay(500);
113         }
114
115         initManagedDevice();
116         Serial.println();
117     }
118 }
119 void wificonnect() //function defination for wificonnect
120 {
121     Serial.println();
122     Serial.print("Connecting to ");
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126         delay(500);
127         Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("Wifi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());

```

```

124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133   }
134
135   void initManagedDevice() {
136       if (client.subscribe(subscribetopic)) {
137           Serial.println(subscribetopic);
138           Serial.println("subscribe to cmd OK");
139       } else {
140           Serial.println("subscribe to cmd FAILED");
141       }
142   }
143
144   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145   {
146
147       Serial.print("callback invoked for topic: ");
148       Serial.println(subscribetopic);
149       for (int i = 0; i < payloadLength; i++) {
150           //Serial.print((char)payload[i]);
151           data3 += (char)payload[i];
152       }
153
154       // Serial.println("data: "+ data3);
155       // if(data3=="Near")
156       // {
157       // Serial.println(data3);
158       // if(data3=="Near")


```

```

142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }

```

OUTPUT:

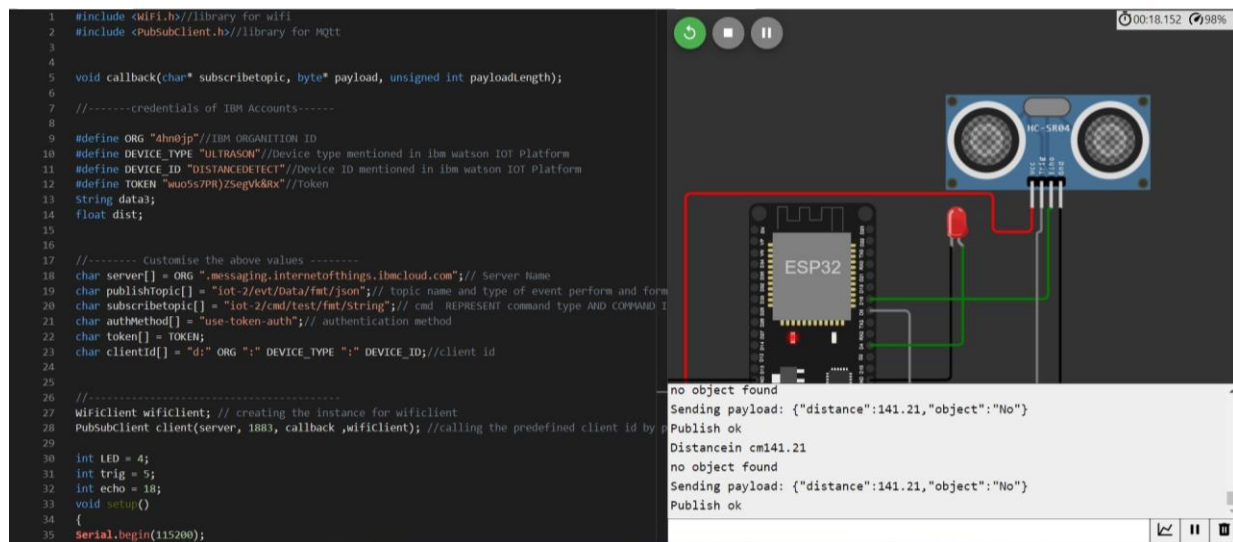

Data sent to the IBM cloud device when the object is far

Browse
Action
Device Types
Interfaces

Add Device

DISTANCEDetect
Disconnected
ULTRASON
Device
Oct 20, 2022 9:46 AM

Identity
Device Information
Recent Events
State
Logs


The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.21,"object":"No"}	json	a few seconds ago
Data	{"distance":141.18,"object":"No"}	json	a few seconds ago
Data	{"distance":141.2,"object":"No"}	json	a few seconds ago

Items per page 50 | 1-2 of 2 items
1 of 1 page

when object is near to the ultrasonic sensor

Data sent to the IBM Cloud Device when the object is near

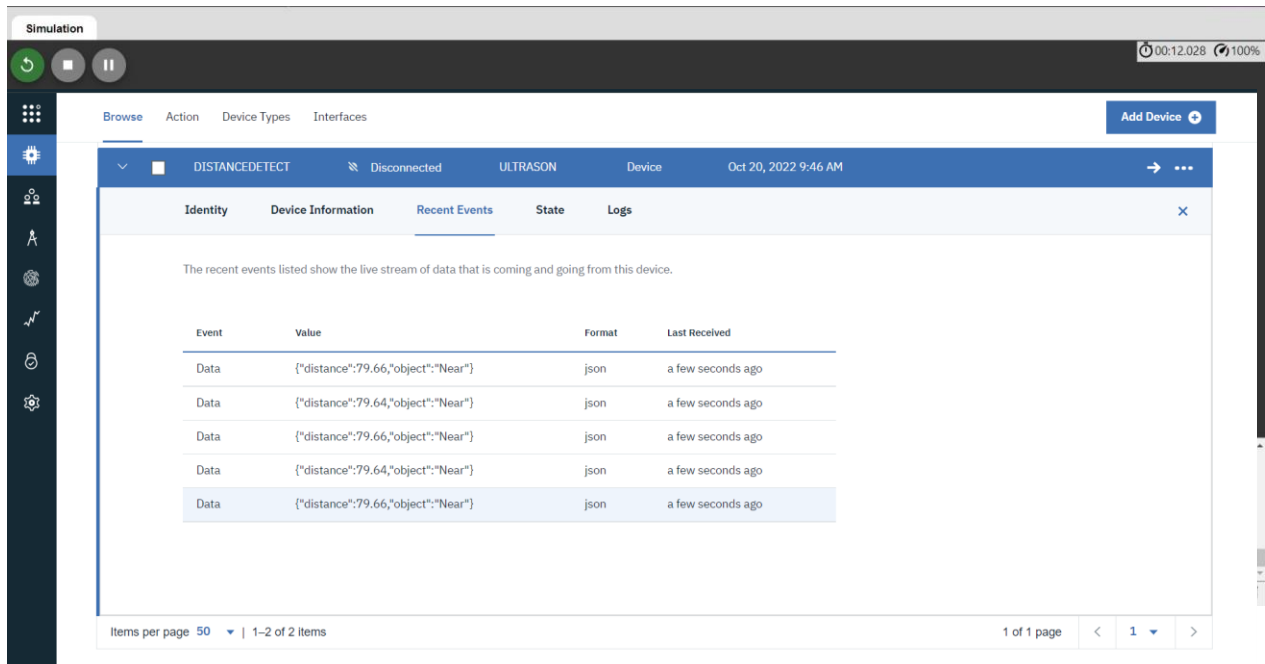

The screenshot displays the Wokwi simulation environment. At the top, a 'Simulation' tab is active, with controls for play, stop, and pause. The top right shows a timer at 00:12.028 and 100% zoom. The main interface has a sidebar with various tool icons. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A 'DISTANCEDTECT' device is selected, showing its status as 'Disconnected' and 'ULTRASON' type. The 'Recent Events' tab is active, displaying a table of events. The table has columns for Event, Value, Format, and Last Received. The events are all 'Data' type, with values like '{"distance":79.66,"object":"Near"}' and format 'json'. The last received time for all events is 'a few seconds ago'. The bottom of the interface shows 'Items per page 50' and '1-2 of 2 items'.

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

<https://wokwi.com/projects/346666873885033042>