

#### Assignment -4

Assignment Date	02 November 2022
Student Name	Bhoobesh.G
Student Roll Number	191041013
Maximum Marks	2 Marks
Team ID	PNT2022TMID16932

#### Question:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.

#### Code:

```
#include <WiFi.h>
#include <WiFiClient.h>
#include <PubSubClient.h>
const int trigPin = 27;
const int echoPin = 26;
//define sound speed in cm/uS
#define SOUND_SPEED 0.034
#define CM_TO_INCH 0.393701
long duration;
float distanceCm;
float distanceInch;
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----

#define ORG "z22obn"//IBM ORGANITION ID
#define DEVICE_TYPE "Assignment-ibm"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "Sensor"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
```

```

char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send

char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd REPRESENT command
type AND COMMAND IS TEST OF FORMAT STRING

char authMethod[] = "use-token-auth";// authentication method

char token[] = TOKEN;

char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient);


void setup() {
    Serial.begin(115200); // Starts the serial communication
    pinMode(trigPin, OUTPUT); // Sets the trigPin as an Output
    pinMode(echoPin, INPUT); // Sets the echoPin as an Input
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop() {
    // Clears the trigPin
    digitalWrite(trigPin, LOW);
    delayMicroseconds(2);
    // Sets the trigPin on HIGH state for 10 micro seconds
    digitalWrite(trigPin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigPin, LOW);

    // Reads the echoPin, returns the sound wave travel time in microseconds
    duration = pulseIn(echoPin, HIGH);

```

```

// Calculate the distance
distanceCm = duration * SOUND_SPEED/2;

// Convert to inches
distanceInch = distanceCm * CM_TO_INCH;

// Prints the distance in the Serial Monitor
Serial.print("Distance (cm): ");
Serial.println(distanceCm);
Serial.print("Distance (inch): ");
Serial.println(distanceInch);

PublishData(distanceCm);
delay(1000);
if (!client.loop()) {
    mqttconnect();
}
}

void PublishData(float Cm) {
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"Distance (cm)\":\"";
    payload += Cm;
    payload += "\"}";
    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {

```

```
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud
then it will print publish ok in Serial monitor or else it will print publish
failed
```

```
    } else {
        Serial.println("Publish failed");
    }
}
```

```
}
```

```
void mqttconnect() {
```

```
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
    }
}
```

```
    initManagedDevice();
    Serial.println();
}
```

```
}
```

```
void wificonnect() //function defination for wificonnect
```

```
{
    Serial.println();
    Serial.print("Connecting to ");
```

```
    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
```

```
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
```

```
    Serial.println("");
```

```
    Serial.println("WiFi connected");
```

```

    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}


void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else
    {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
}

```

**Wokwi Output:**

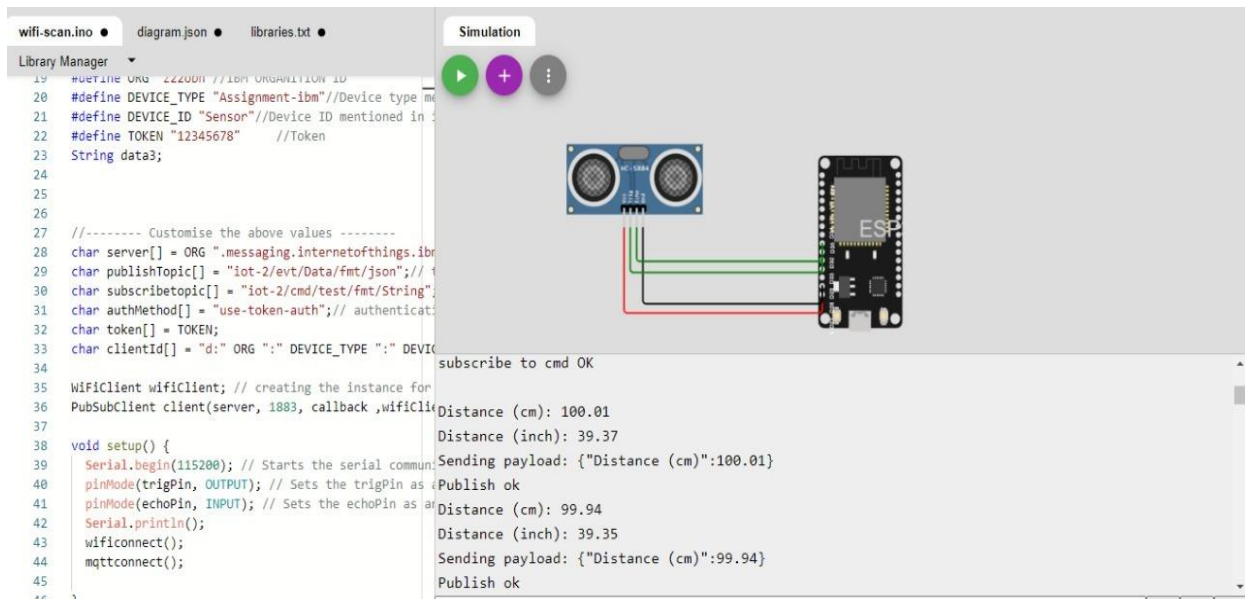

## IBM Cloud Alert:

Event	Value	Format	Last Received
Data	{"Distance (cm)":99.98}	json	a few seconds ago
Data	{"Distance (cm)":99.96}	json	a few seconds ago
Data	{"Distance (cm)":99.98}	json	a few seconds ago
Data	{"Distance (cm)":99.98}	json	a few seconds ago
Data	{"Distance (cm)":99.98}	json	a few seconds ago

## Wokwi Share Link:

<https://wokwi.com/projects/305569599398609473>