ASSIGNMENT 4

Date	**24 October 2022**
Team ID	PNT2022TMID14187
Project Name	**Project - Gas Leakage monitoring and Alerting system for Industries**
Maximum Marks	**4 Marks**

Project Title **: Gas Leakage monitoring & Alerting system for Industries**

Team ID: PNT2022TMID14187

Team Members:

1. **Amrith B - Team Leader**

2. **Ajay R- Team Member**
3. **Amarnath A- Team Member**
4. **Aswin S- Team Member**

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h> #include <PubSubClient.h> void callback(char*
subscribetopic, byte* payload, unsigned int payloadLength);
//-------credentials of IBM Accounts------
#define ORG "Ashfaq1824"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token String data3; char server[] =
ORG ".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char
subscribetopic[] = "iot-2/cmd/test/fmt/String"; char
authMethod[] = "use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5; const int echoPin = 18; #define
SOUND_SPEED 0.034 long duration; float distance; void
setup() { Serial.begin(115200); pinMode(trigPin,
OUTPUT);
pinMode(echoPin, INPUT);
wificonnect(); mqttconnect();
} void loop() {
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
```

```
delayMicroseconds(10);
digitalWrite(trigPin, LOW); duration
= pulseIn(echoPin, HIGH); distance =
duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000); if
(!client.loop()) {
mqttconnect();
} } delay(1000); } void
PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
} }
void mqttconnect() { if
(!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print("."); delay(500); }
initManagedDevice(); Serial.println();
} } void
wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while
(WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
} void initManagedDevice()
{
```

```
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
} } void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength) {
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic); for (int i =
0; i < payloadLength; i++) {
//Serial.print((char)payload[i]); data3 +=
(char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}
```

SCHEMATIC/CIRCUIT DIAGRAM:

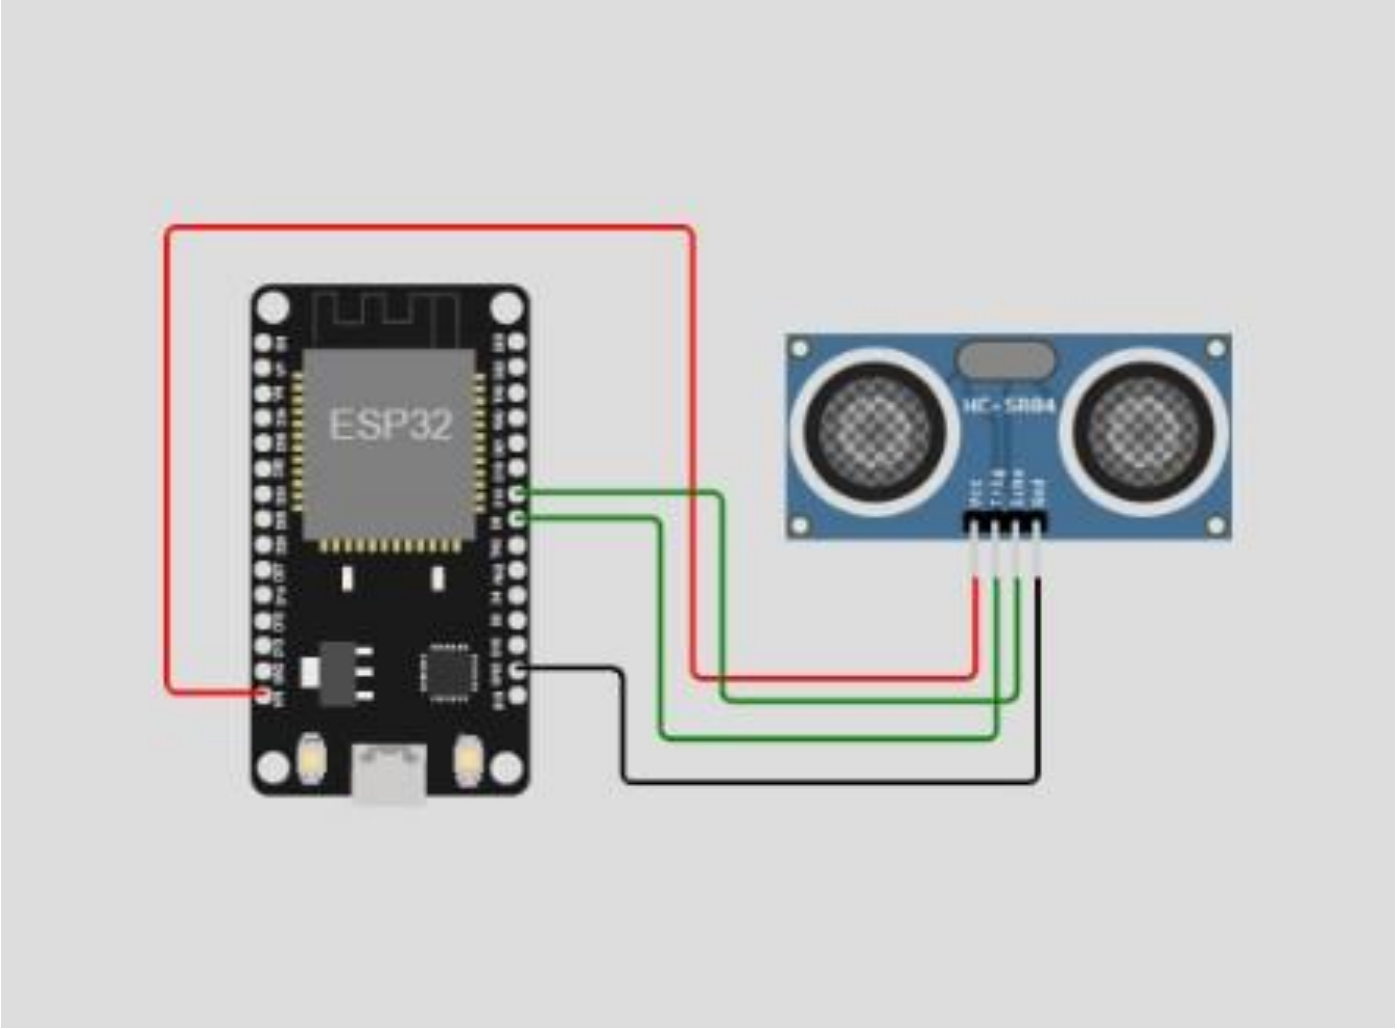

IBM CLOUD OUTPUT:

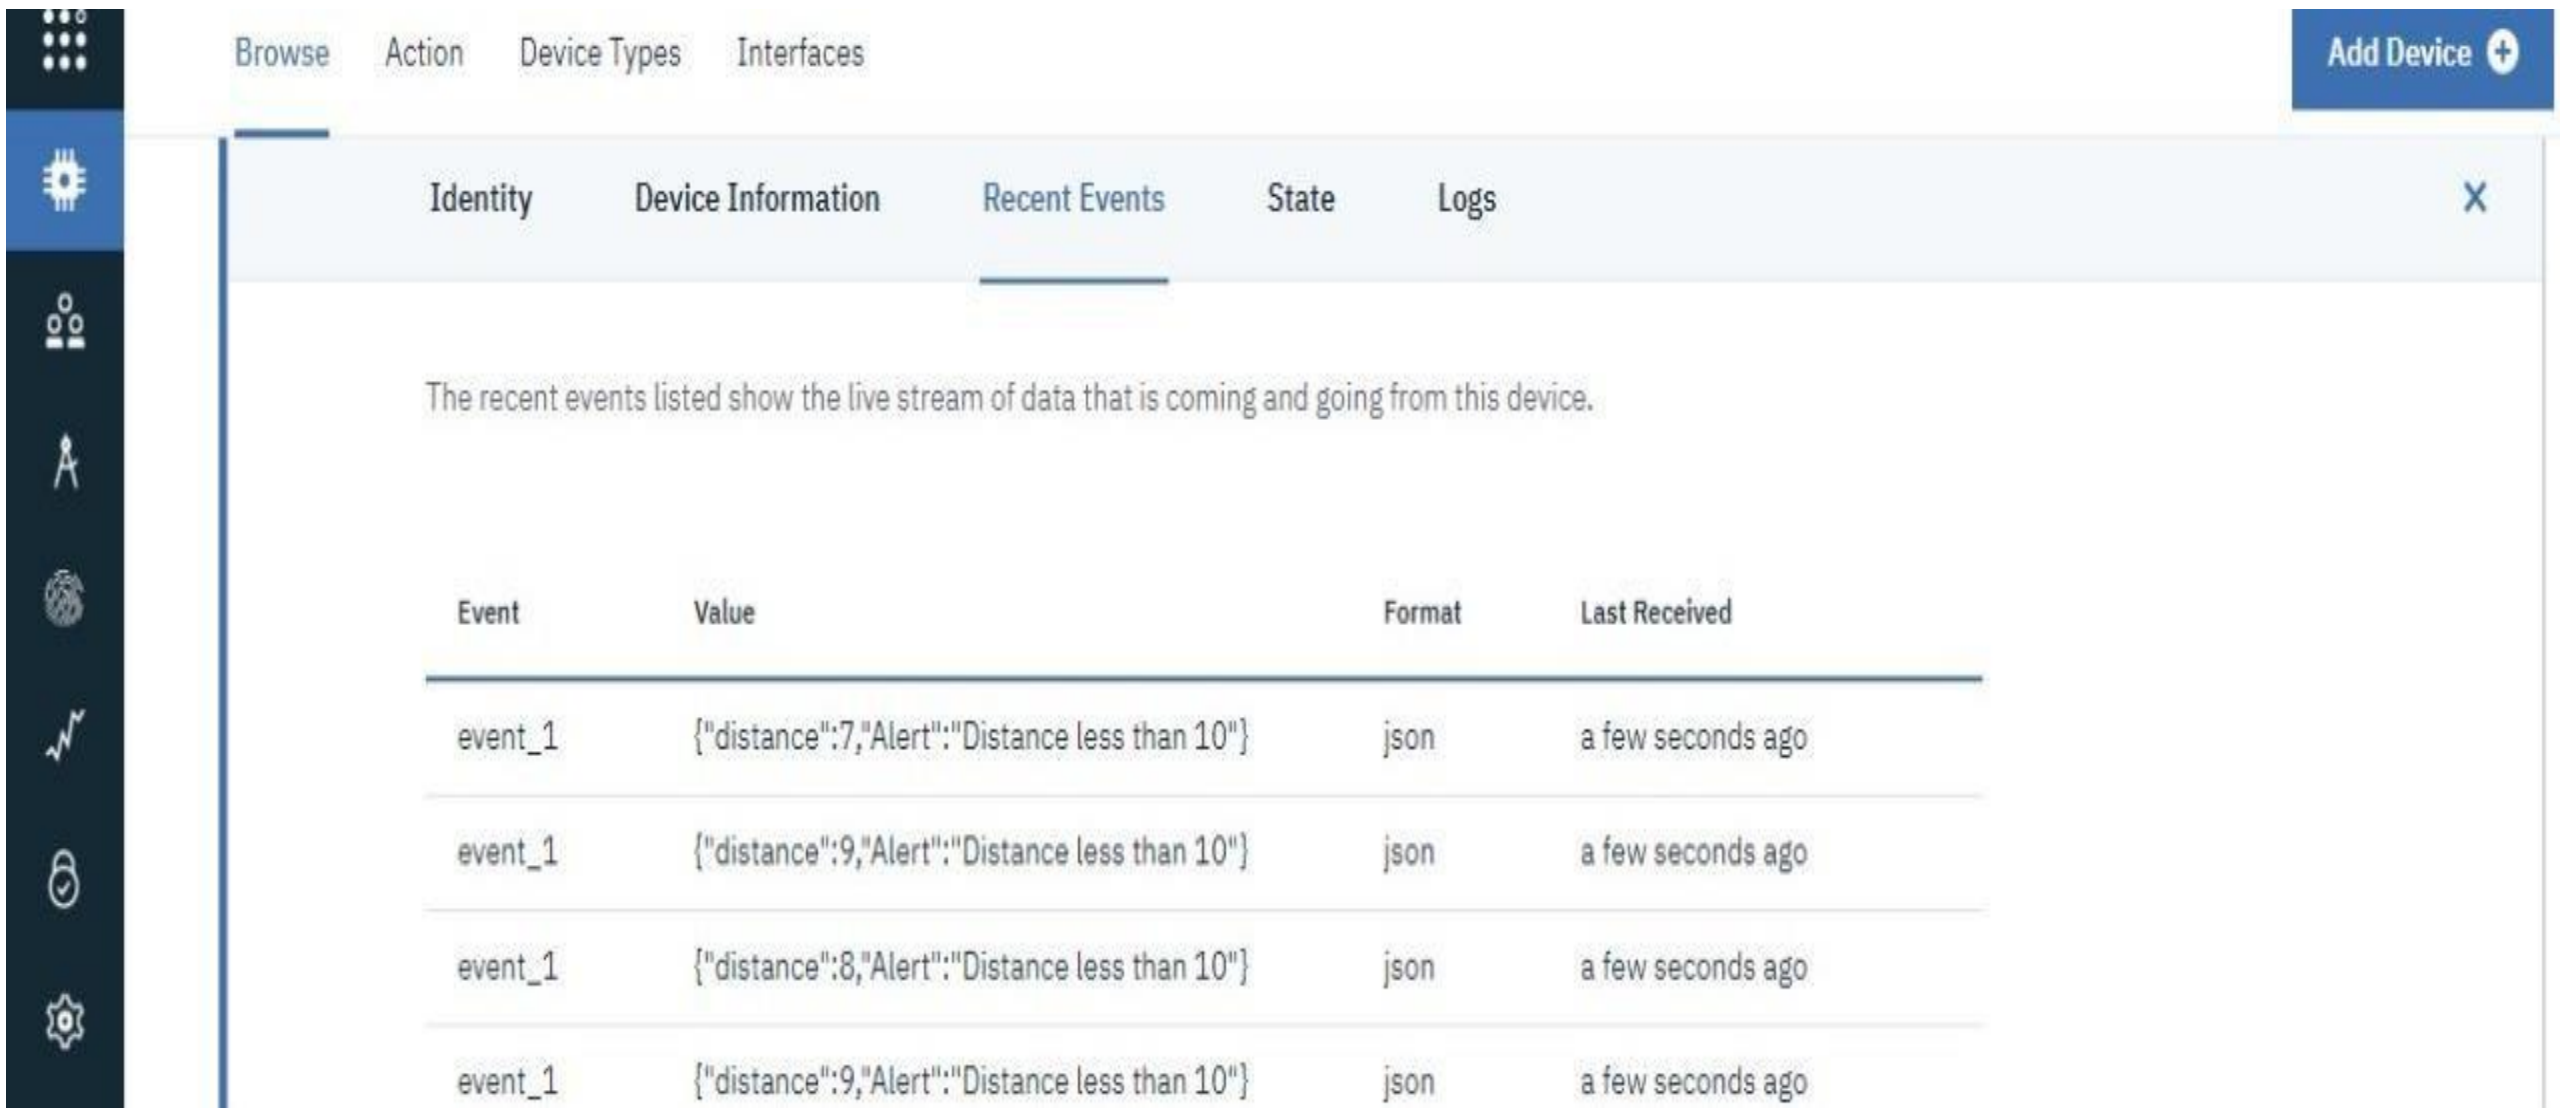

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago

WOKWI LINK: https://wokwi.com/projects/346870857502556755