

University for Applied Sciences
Informatics Department
Applied Informatics

No More Waste

Documentation for the Architecture of an Mobile Application for Preventing Food
Waste

Bruno Macedo da Silva
676839
inf3645@hs-worms.de

Supervisor	Prof. Dr. Volker Schwarzer
Working Period:	Summer Semester 2022
Due Date:	31.Juni 2022

Contents

Abbreviations	3
Glossary	4
1 Introduction and Goals	6
1.1 Design Purpose	6
1.2 Requirement Overview	7
1.3 Quality Goals	8
1.4 Stakeholders	9
2 Architecture Constraints	10
3 Context and Scope	12
3.1 Business Context	12
3.2 Technical Context	13
4 Building Block View	14
4.1 Behaviour view	14
4.2 Structural view	15
5 Crosscutting Concept	18
5.1 Solution for Usability	18
5.2 Solution for Interoperability	18
5.2.1 Payment Gateway	18
5.2.2 Federated Authentication	19
5.3 Solution for Performance	19
6 Quality Requirements	21
6.1 Quality Tree	21
6.2 Evaluation Scenarios	21
References	27

Abbreviations

API Application Programming Interface.

FAO Food and Agriculture Organization of the United Nations.

UN United Nations.

Glossary

Activity Diagram This kind of diagram shows the behavior of a system, it depicts in a graphical fashion the logic of a single use case [Baresi, 2009]..

API Gateway Server used an single entry point into a system. It forwards requests to the used service. It is broadly used for authentication, auditing and logging services [Richardson, 2020].

App It refers to the mobile application to be developed.

Class Diagram This kind of diagram presents the structure of a system with its classes, attributes, methods and relationships[IBM, 2004].

Client Since we have two major stakeholders that will use the app, the word client will specify the one that places an order in the app.

Federated Login Authentication method in which users use existing accounts to gain access to another domains or systems without the need of creating new credentials. The authenticity of a user is attested by service and granted to another [Robinson, 2019].

Load Balancer Device used to distribute traffic/resource/request across different servers, so one of them are not overloaded [nginx, 2021].

Microservice Software architecture approach made of small independent services used to communicate with other resources like APIs. The advantage of using this architecture is its scalability and maintainability, since each service is responsible for a very small group of correlated tasks [AWS, 2017].

Mobile Payment Gateway Those services works as an intermediary between customer, merchant and bank/credit card company. Here a payment request is sent to the gateway and forwarded to the approval instances. The core functionality of those gateways is the cryptography within the communication steps[Vilmate, 2019].

Provider The second major stakeholders are those who offer their products. They can be restaurants, bakeries, pastries and similar.

Stakeholder Describes all kind of potential person or entity that may have interest using the app.

System Response The output of a system after an input [HWE.DESIGN, 2020]. [Robinson, 2019].

Use Case Diagram This kind of diagram presents the main requirements and functionalities of a system. It displays a simplified overview of core purpose of the application [Waykar, 2015].

User See stakeholder.

Wrapper Element used to encapsulate the complexity of one entity so it can be processed by another entity [techopedia, 2018].

1 Introduction and Goals

According to the Food and Agriculture Organization of the United Nations (FAO) in 2019, 931 millions tonne of food were wasted [FAO, 2013]. This has environmental, but especially social consequences. In a world where approximately 9.9% of the [AAH, 2022] population suffers from hunger that waste percentage sounds paradoxal.

According to United Nations (UN) 5% of the global food loss and waste comes from restaurants [UN, 2022]. The solution for this problem must be locally applied so its effects can be seen in a global structure. To do so we propose to develop a mobile application that connects restaurants, bakeries and or pastries to clients. The former would offer their remaining products, which are still consumable, prior to the closing time, to a small price and the latter would browser in the app to find which shops are offering products.

We as “Clean Up the World ®” are a rising StartUp whose main concerns is to find environmental solutions to daily problems. Our portfolio includes projects about management of waste and optimization of household water usage. This product we want to develop targets small communities, like small cities or regions within a big city, to reduce the amount of wasted consumable food.

With our project we want to achieve the following goals:

- Connect providers with clients, so the former can offer products that the latter can purchase
- Collect statistical data about waste reduction within the providers
- Promote reduction of food waste that still could be consumed
- Allow clients to have a different dining experience.
- Allow providers to promote their products and gather new clients.

1.1 Design Purpose

The main purpose of this architecture is creating an exploratory prototype of an App. We aim to test it with potential stakeholders and regions to analyze their general acceptance and wishes [Cervantes and Kazman, 2016] and get a fast feedback.

This prototype will also make it feasible to identify unknown needs and wishes of the potential stakeholders, so we can eventually increase the scope of functionality. Exploring this domain will also provide us with information regarding the behavior of our target group when it comes to buying and serving food that would be wasted, but is still consumable.

1.2 Requirement Overview

The following functionalities describe the basic requirement for the App:

Id	Requirement	Description
F-1	Register as Client.	A Client can register to the app with its e-mail.
F-2	Login	After registration Client can login into the app.
F-3	Purchase option	A registered Client can purchase an available offer (see F7).
F-4	Filter/search options	A Client can perform filter and search actions for products.
F-5	Register as Provider	A Provider can register his store and add logos and pictures.
F-6	Create offer	A registered Provider can publish what products they are offering with price and amount.
F-7	Upload offer	A registered Provider can add, edit or remove offers to his catalog.
F-8	Check orders	A registered Provider can check all existing orders targeting his/her shops.

ID	Motivation
F-1	The entry door of the App, where our Client get an overview of all available offers
F-2	In order to place purchases our client need to be registered. It will also provide statistical information about consumer behavior
F-3	Since we are dealing with a business relationship we have on one side a client willing to pay and for a product and on the other side a provider willing to offer a product/service
F-4	Like any other online-shop it is important that our Client can browse through the available possibilities
F-5	In order to make a product available a Provider needs to register his/her shop. This information will also be used for statistical analyzes about providers, products and consumer behavior
F-6 - F-7	A registered Provider can make an offer available according to his/her daily planning. For future development of this app, this will be helpful to identify tendencies regarding dates, periods and availabilities.
F-8	Also registered providers can get an overview about how often their products have been sold. This may open a different kind of business orientation.

The following Use Case Diagram displays an overview of the primary functionality of the app:

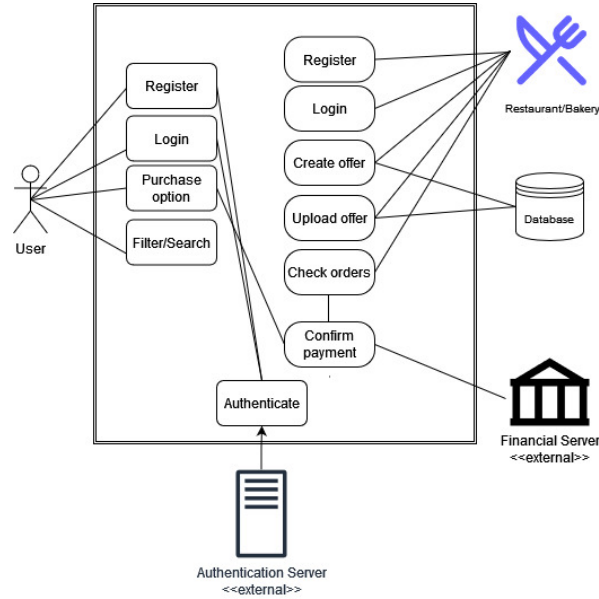


Figure 1: Preliminary functions

1.3 Quality Goals

The key qualities of this app are described in the table below:

Quality	Priority	Motivation
Usability	1	Since we are working with a prototype it is important the usage is easy as possible, to attract more users and to gather information about consumer behaviour. clients and providers should have a simple interface where they can quickly interact without any burdens.
Interoperability	2	To reduce programming burdens and accelerate the delivery of a working product the registration and payment process will rely on third party providers. For that reason the developed features should work faultless in combination with the external Application Programming Interface (API)s (i.g Mobile Payment Gateway and Federated Login).
Performance	3	Many mobile and web-apps lose potential users because of the lack of performance. A System Response that takes too long (more than 1 second [AppDynamics, 2020]) may frustrate potential users and discourage them of using the application.
Security	4	To guarantee a secure and easy payment process we will handle the API of the Mobile Payment Gateway within the development process. The possibility of outsourcing this service would cause a big damage to the first priority.

1.4 Stakeholders

The main stakeholders of this app are described in the table below:

Stakeholder	Description	Motivation
Providers	Owner of a restaurant, bakery or pastry.	One of the protagonist of this app. They will interact with clients using the app. From his usage we will gather valuable information about consumer behaviour.
Clients	Person who wants to purchase last minute product from a provider.	The second protagonist of the app they will interact with the provider to search and to purchase product. The result of this interaction will provide us with statistical information to understand how food waste can be reduced.
Developers	Team in charge of creating the application using existing tactics and creating new solutions.	Responsible for guarantee that the main requirements of the app are fulfilled and fully functional. Since they will be dealing with the background of the product, it is important that they understand it very good so it can also be implemented in a final version.
Boarding Committee of "Clean Up the Word (R)"	Members of the management team who wants to delivery environmental solution do daily problems and at the same time develop a profitable product.	Group in charge of main decisions regarding what will be developed. Their decision are based on mark tendencies and on environmental issues.
Environment Activist	Part of the society who aims to find environmental solutions to daily problems.	They integrate local discussion groups, local public institutions, schools and universities. They are the one who brings their concerns to the boarding committee.

2 Architecture Constraints

In this project we must distinguish between Technical and Organizational Constraints. The former describes specific elements of the project, like programming language, released platform (e.g. operational systems) and technical decisions related to the functionalities. The latter deals with management elements[Franzen and Thoms, 2020] (e.g time, budget and team). The following tables describes the technical and the organizational constraints of this project:


Technical		
Id	Constraint	Description
CT-T-1	Programming Language	A multilanguage (Java, Kotlin, iOS, Swift) approach increases the maintainability burden and consequently the costs (see CT-B-4). It can also interfere with compatibility with different kind of device.s
CT-T-2	Platform	Offering the application for different platforms (iOS and/or Android) increases costs for maintainability and requires a bigger team. Since the prototype should run during the first year mainly to gather information about consumer behavior the costs in this test phase can increase rapidly if we decide to develop for the most common platforms.
CT-T-3	Payment	One the one hand creating an own payment framework can gives full control of the application, but on the other hand it will required specialized team and increases costs and time (see CT-B-4).
CT-T-4	Payment gateway	Using existing Mobile Payment Gateway reduces development time, but demands fully Interoperability of the app with the existing gateways. It may also be a problem if the Client don't use this kind of payment method.
CT-T-5	Login	Using existing Federated Login decreases development time, but like CT-T-4 demands fully interoperability of the app with appliances. It may also be a problem if the Client don't trust this kind of login.

Organizational		
Id	Constraint	Reasoning
CT-O-1	Time to first prototype release	How much time is acceptable from starting the project until we have a functional prototype that can be used by our user?
CT-O-2	Development Team	The existing team can cover the main existing platforms, but their availability may be restricted to due work on other projects Specially for the maintainability of the app it can represents a problem.
CT-O-3	Analytical Team	During running phase of the prototype it will be necessary to have a team in charge of evaluating and interpreting the collected data, to find out if the goals are being achieved.
CT-O-4	Budget	Since this application falls in the category “middle app” according to [SPD LOAD, 2019] the available budget of US\$ 150.000 should cover the development of the main functionaliy and the data analisys (see CT-O-3)

3 Context and Scope


Since this system relies on the correct working of external elements it is important that their interaction is corrected displayed.

3.1 Business Context

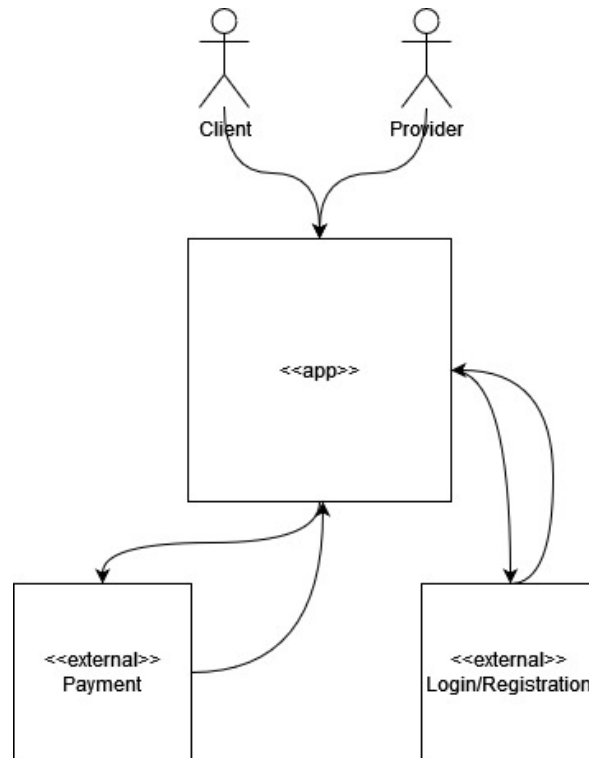

Artefact	Description
Client	Searches for a last time offer from a restaurant, bakery or pastry.
Provider	Offers a still consumable product that was not sold during normal working time.
Payment	Deals with the payment processing using registered information from another payment platforms.
Login/Registration	Authenticated users using logins from other platforms.

3.2 Technical Context

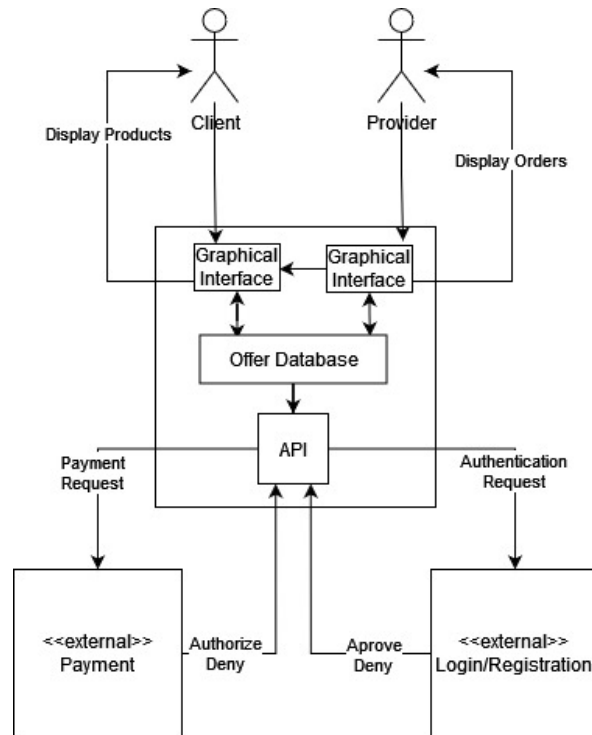

Artefact	Description
Graphical Interface	Client and Provider have an own interface to interact. Provider can access view their offer also with a Client's perspective.
Offer Database	clients and providers can make requests to the database to inquire about its content.
API	For login and payment the authentication and authorization take places on the external service.

4 Building Block View

In this section we will describe the App using some elements of the 4+1 Architectural View Model. With this model we will represent the App using five different views, which should focus on specific elements of the project. Each view provide a different purpose [Kruchten, 1995]. For this project we will provide the 3 following views of the 4+1 Architectural View Model:

- **Scenario view:** simple description for the end user
- **Behaviour view:** description of the existing processes
- **Structural view:** object-oriented decomposition

The scenario view was presented in the figure 1 of this project.

4.1 Behaviour view

The following Activity Diagram depicts the register and login procedure within the app.

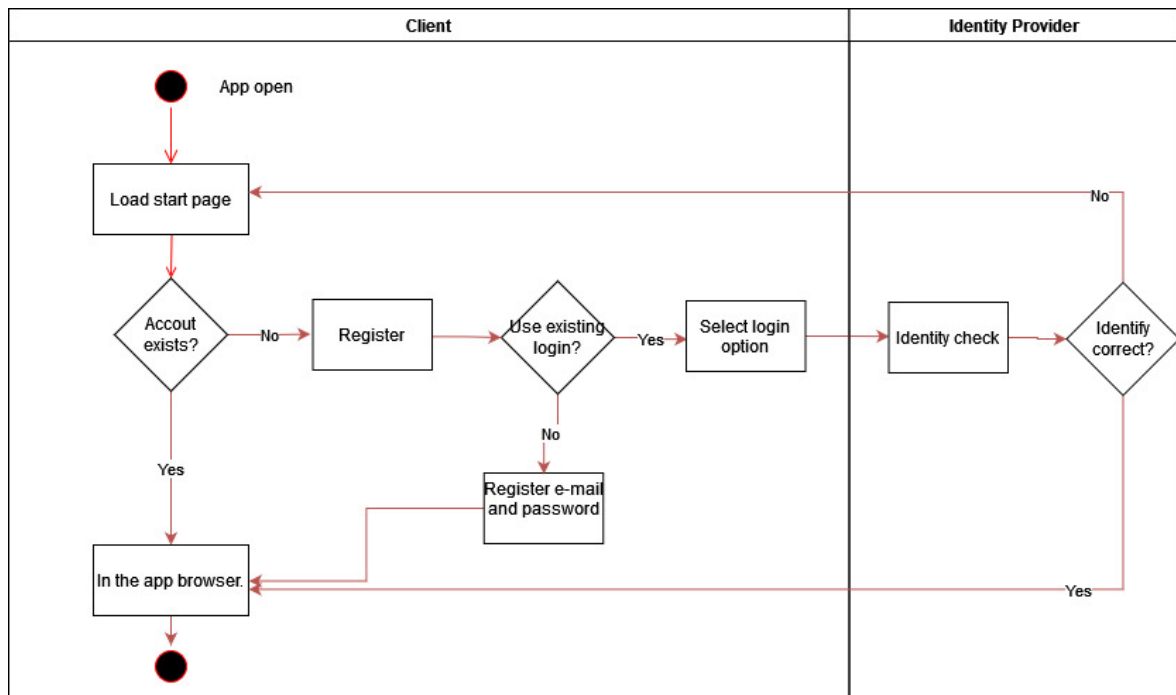


Figure 2: Login procedures

4.2 Structural view

To describe this view we choose a Class Diagram. With it we may provide a static description of elements of our app. This will be very relevant for the developing process of the App.

The first part of the this diagram describes the element within the Provider. It contains one or more addresses and it can offer one or more products. A provider will also fall into the category restaurant, bakery or pastry.

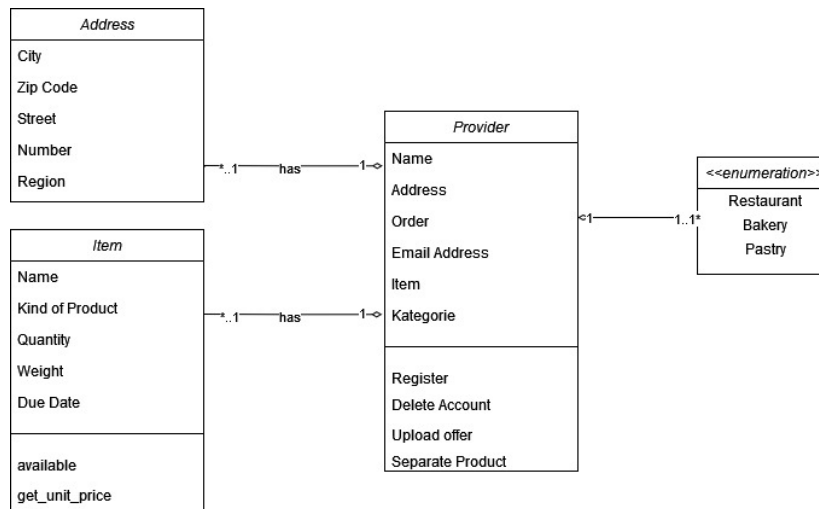


Figure 3: Provider overview

The class dedicated to the clients should be as simple as possible. It should provide basic interaction like registering, logging, deleting account, viewing product and placing order. The two last actions will establish the communication with the providers.

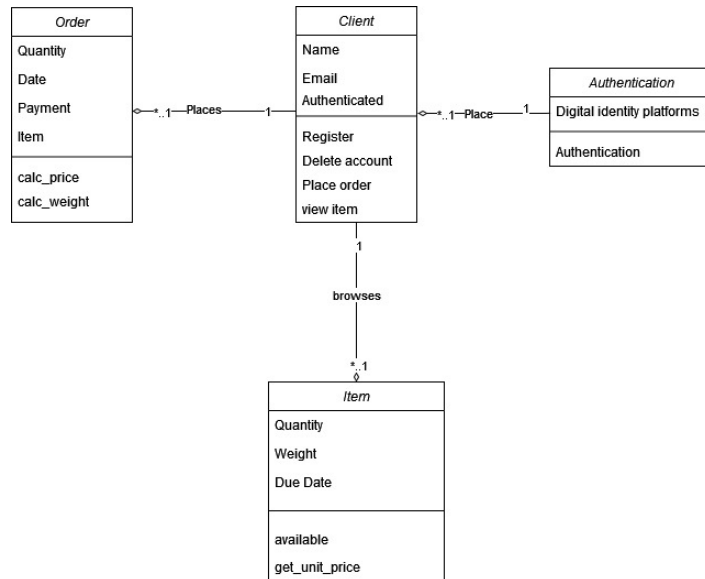


Figure 4: Client Overview

Finally we have an order placed by a Client and processed by a Provider. Here we will rely on a third party to stablish the payment procedures.

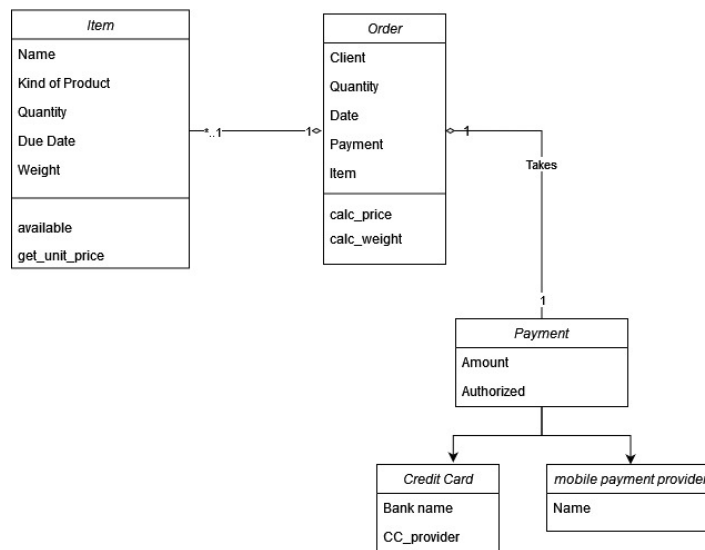


Figure 5: Order Overview

This final graphic show the whole classes in combination:

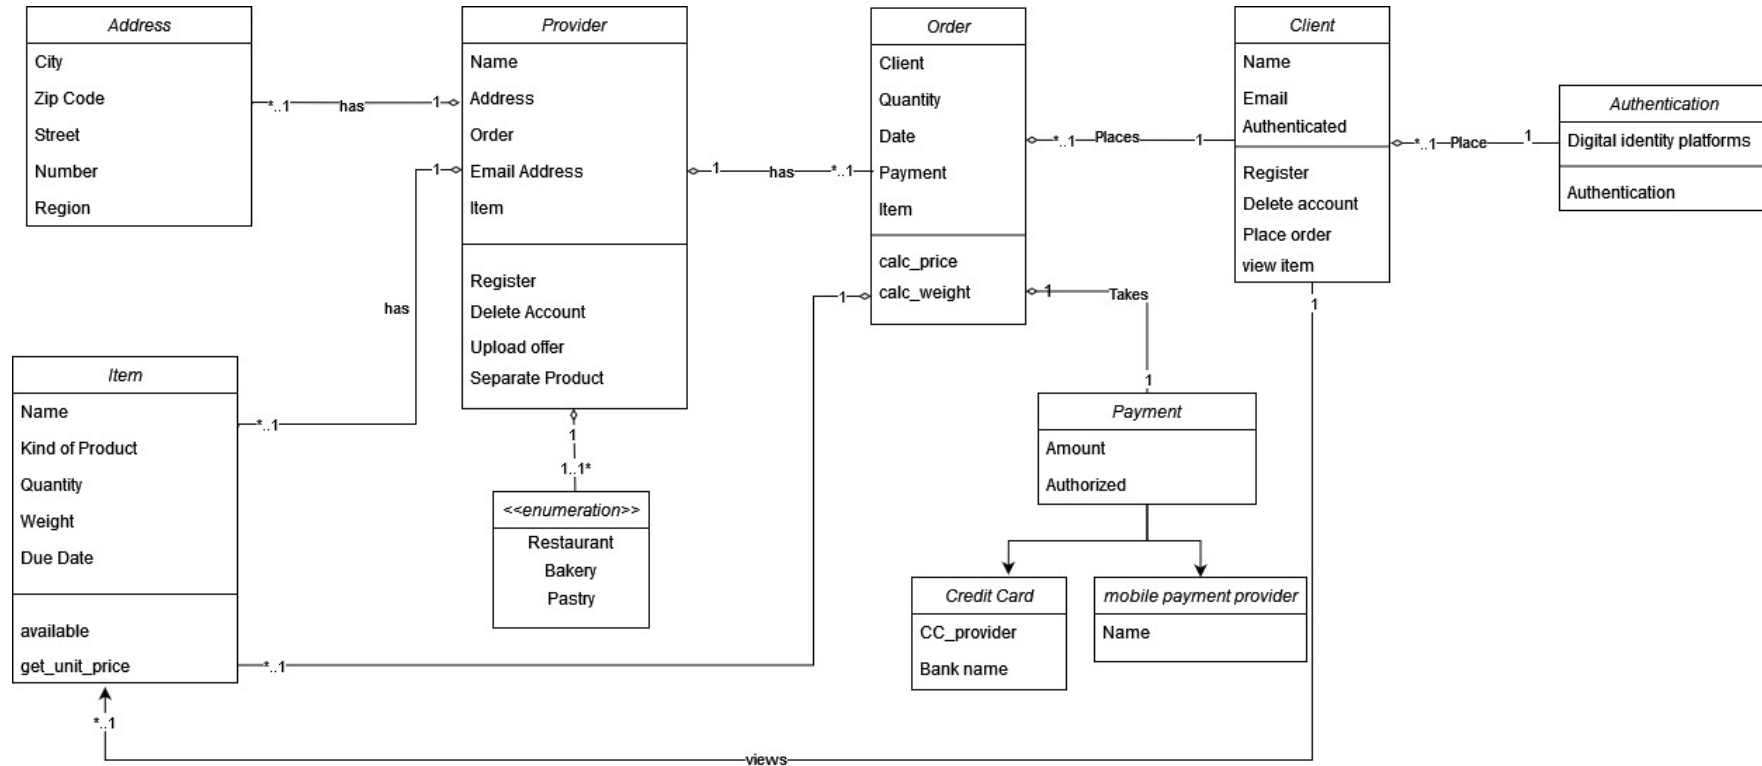


Figure 6: Classes Overview

5 Crosscutting Concept

In this chapter we will present the technical solutions that we will use to develop this project. For each quality attribute we will present the chosen tactitics.

5.1 Solution for Usability

5.2 Solution for Interoperability

The communication with the 3rd party components should during the whole lifetime of the App reliable. Since we are dealing with two different services, Mobile Payment Gateway and Federated Login, we will describe the integration processes according to each specification.

From the third party applications we expect the following interaction:

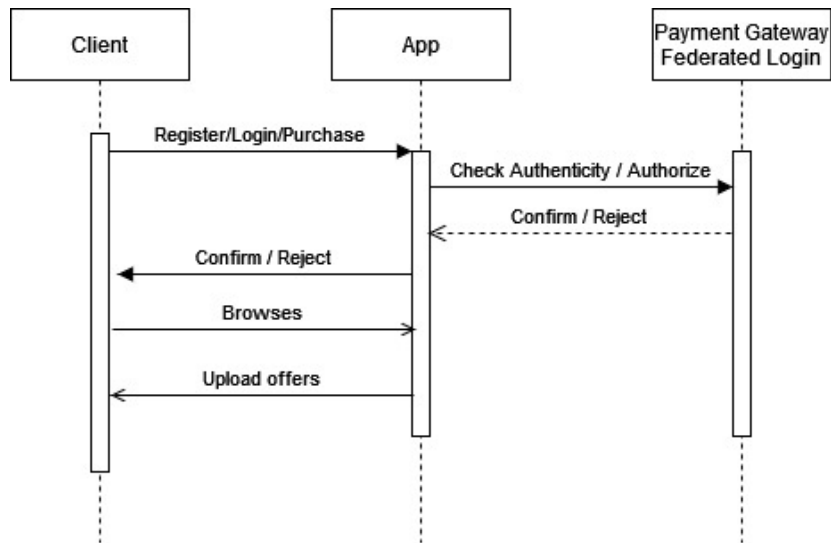


Figure 7: Sequence of actions with 3rd party applications

5.2.1 Payment Gateway

The usage of Mobile Payment Gateway offers three possibilities [Zoho, 2019]:

- Redirection to payment processor's page
- Payment data and processing inside the application

- Payment data entered in the app, but processed with an API

The third option stays in direct contact with our top quality attribute, usability. Since we want to offer a easy shopping experience, the payment process should also be harmonic with other features.

Tactict	Pattern	Motivation
Limit Dependencies	Wrapper	The API will be the intermediary for the payment process. For the clients all visible steps will occur in the app, without being sent to another page. On the background the API will receive the input and send it to the payment gateway. The verification takes place in gateway, which then communicate with the financial institute of the client and send the payment to the Provider [Zoho, 2019].

5.2.2 Federated Authentication

Using of Federated Login reduces burden of saving user credentials locally. It also improves the Usability so users do not have to create and remember another username and password. The authentication process takes place on the third party operator, as seen in the picture 7.

Tactict	Pattern	Motivation
Microservice	API Gateway	It increases security, so the microservice is not directly exposed to the external world. It reduces the complexity of the microservice, since the gateway will have to deal with data transfer rate, tokens and other activities. Dealing with failures would also be handled and logged by the microservice [javarevisted, 2021].

5.3 Solution for Performance

We want our app to have a fast (no more than 1 second) response time. By clicking on an offer a Client should have it immediately displayed on his/her screen. Updated made by providers should also be promptly available for clients to browse.

Tactict	Pattern	Motivation
Increase Resources	Load Balancer	Specially during peak times we want our users to have a smoothly and fast interaction with the app. providers and clients should perform their tasks, either browsing, purchasing or uploading offering without having to wait to get a response. With this decision all requests would be forwarded to the server that are available avoiding queuing of requests.

6 Quality Requirements

6.1 Quality Tree

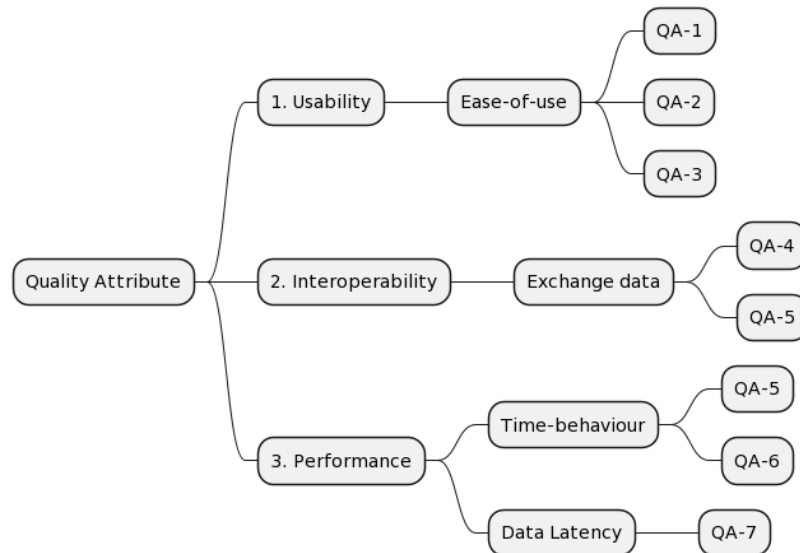


Figure 8: Preliminary functions

6.2 Evaluation Scenarios

From the requirements, 1,2, we could develop the following uses cases and depict the main quality attributes of this project.

Use Case	Description
UC-1: Register as Client	The Client registers an e-mail address.
UC-2: Login	The Client logs in to the system.
UC-3: Places an order	The Client chooses a Provider.
UC-4: Register payment	The Client registers a payment method.
UC-5: Register as Provider	The Provider registers their facility and products.
UC-6: Update availability	The Provider uploads their product catalog.

With the following use cases we will be able to define the major quality attributes that are involved in the development of this application. They should be measurable and testable so we can verify if the system meets the needs our stakeholders [Cervantes and Kazman, 2016].

ID	Quality Attribute	Scenario	Associated Use Case
QA-1	Usability	A Provider is able to register his company, to specify the kind of products he/she offers and upload a logo or picture of his shop and products in a easy and fast (within 5 Minutes) fashion.	UC-5
QA-2	Usability	A Provider is able to update the offers at any time.	UC-6
QA-3	Usability	A Client is able to search and filter options.	UC-6
QA-4	Interoperability	A Client can register his e-mail using another account (Google, Microsoft, Facebook) in a Federated Login	UC-1
QA-5	Interoperability	A Client can pay the order using a Mobile Payment Gateway (e.g. Stripe, Square, PayPay, SecurePay)	UC-4
QA-5	Performance	A Client registers his/her e-mail address and can immediately browse in the app.	UC-1
QA-6	Performance	A Client opens the app and he can immediately search for products or providers.	UC-2
QA-7	Performance	A Client chooses a Provider and places his order. After the confirmation of payment, a push-message is displayed in the app confirming the purchase.	UC-3
QA-8	Security	The payment process should be secure and within the app. It should also give the Client the feeling of security. The Client inserts his payment information it is processed.	UC-4 & QA-5

The defined quality attributes are represented in the following scenarios:

Usability	
Scenario	Value
Source	Provider
Stimulus	wants to register his/her shops
Artifact	app
Environment	working time, during afternoon
Response	offer available in the app
Response Measure	How long did the registration and upload process take? How many and what kind of error messages did the Provider get?
Source	Registered Provider
Stimulus	wants wants to make a last minute offer
Artifact	app
Environment	peak period, between 4 and 7 pm on Friday
Response	immediate availability of the offer in the app
Response Measure	How long did it take to upload an offer? How many and what kind of error messages did the Provider get?
Source	Registered Client
Stimulus	wants to search/filter offers
Artifact	app
Environment	peak period, between 4 and 7 pm on Friday
Response	display of the filter/search output
Response Measure	What kind of inputs did the user has to place until he/she finds what he/she wants? Did he have to type anything or were filter/search options available? How long it takes until the client finds a product?

Interoperability	
Scenario	Value
Source	Client
Stimulus	wants register using a Federated Login
Artifact	app and Federated Login provider
Environment	peak period (on the context of the Federated Login provider)
Response	authentication succeed or failed
Response Measure	How much data was transmitted and how much was queued?
Focus	System overload [Kasunic and Anderson, 2004]
Source	Client
Stimulus	wants to pay using existing mobile payment account
Artifact	app and Mobile Payment Gateway
Environment	peak period (on the context of the gateway)
Response	confirmation / declined
Response Measure	Total amount generated data in the app that are transferred and processed and rejected by the gateway
Focus	Connectivity and System overload [Kasunic and Anderson, 2004]

Performance	
Scenario	Value
Source	Client
Stimulus	wishes to create an account
Artifact	app
Environment	weekend between 3 and 7 PM
Response	immediate access to the app
Response Measure	time between confirmation and access
Source	Client
Stimulus	wants to search for a Provider
Artifact	app
Environment	peak period, between 6 and 7 pm on a Friday
Response	immediate access to the offers
Response Measure	how quickly does the client's device get update of availabilities
Source	Client
Stimulus	places an order
Artifact	platform
Environment	peak period, between 6 and 7 pm on a Friday
Response	confirmation of payment / payment declined
Response Measure	How long did take until the client get the confirmation/declined of payment?

Secure	
Scenario	Value
Source	Client
Stimulus	input payment data
Artifact	app
Environment	weekend between 3 and 7 PM
Response	immediate forwarding of the data to the API
Response Measure	???????????
Source	Client
Stimulus	wants to search for a Provider
Artifact	app
Environment	peak period, between 6 and 7 pm on a Friday
Response	immediate access to the offers
Response Measure	how quickly does the client's device get update of availabilities
Source	Client
Stimulus	places an order
Artifact	platform
Environment	peak period, between 6 and 7 pm on a Friday
Response	confirmation of payment / payment declined
Response Measure	How long did take until the client get the confirmation/declined of payment?

References

- [AAH, 2022] AAH (2022). World hunger: Key facts and statistics 2022. *actionagainsthunger.org*. <https://www.actionagainsthunger.org/world-hunger-facts-statistics>, Accessed 18th May 2022.
- [Amplify Docs, 2020] Amplify Docs (2020). Federated identities. <https://docs.amplify.aws/sdk/auth/federated-identities/q/platform/android/>. Accessed 9 June 2022.
- [AppDynamics, 2020] AppDynamics (2020). 16 metrics to ensure mobile app success. <https://www.hwe.design/theories-concepts/system-response-stability>. Accessed 8th June 2022.
- [AWS, 2017] AWS (2017). Microservices. https://aws.amazon.com/microservices/?nc1=h_ls. Accessed 9th June 2022.
- [Baresi, 2009] Baresi, L. (2009). *Activity Diagrams*, pages 41–45. Springer US, Boston, MA. https://doi.org/10.1007/978-0-387-39940-9_9, Accessed 26th May 2022.
- [Cervantes and Kazman, 2016] Cervantes, H. and Kazman, R. (2016). *Designing Software Architectures: A Practical Approach*. Pearson Education, Boston.
- [FAO, 2013] FAO (2013). Food wastage: Key facts and figures. *fao.org*. <https://www.fao.org/news/story/en/item/196402/icode/>, Accessed 18th May 2022.
- [FAO, 2022] FAO (2022). 17 *fao.org*. <https://www.fao.org/food-loss-reduction/news/detail/en/c/1378973/>, Accessed 18th May 2022.
- [Franzen and Thoms, 2020] Franzen, E. and Thoms, M. S. (2020). Architectural drivers in modern software architecture. <https://medium.com/@janerikfra/architectural-drivers-in-modern-software-architecture-cb7a42527bf2>, Accessed 18th May 2022.
- [HWE.DESIGN, 2020] HWE.DESIGN (2020). Hardware engineering design. <https://www.hwe.design/theories-concepts/system-response-stability>. Accessed 8th June 2022.
- [IBM, 2004] IBM (2004). What is Class Diagram? <https://developer.ibm.com/articles/the-class-diagram/>, Accessed 18th May 2022.
- [javarevisted, 2021] javarevisted (2021). Top 10 microservices design patterns and principles - examples. <https://javarevisited.blogspot.com/2021/09/microservices-design-patterns-principles.html>. Accessed 9th June 2022.
- [Kasunic and Anderson, 2004] Kasunic, M. and Anderson, W. (2004). Measuring systems interoperability: Challenges and opportunities. Technical Report CMU/SEI-2004-TN-003, Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA. <http://resources.sei.cmu.edu/library/asset-view.cfm?AssetID=6871>. Accessed 1st June 2022.
- [Kruchten, 1995] Kruchten, P. (1995). The 4+1 View Model of architecture. *IEEE Software*, 12(6):42–50. <https://doi.org/10.1109/52.469759>, Accessed 18th May 2022.
- [MuleSoft, 2015] MuleSoft (2015). What is an api? (application programming interface). <https://www.mulesoft.com/resources/api/what-is-an-api>. Accessed 8th June 2022.

- [nginx, 2021] nginx (2021). What is load balancing? <https://www.nginx.com/resources/glossary/load-balancing/>. Accessed 9th June 2022.
- [PayPal, 2016] PayPal (2016). Paypal payments pro. <https://www.paypal.com/us/webapps/mpp/paypal-payments-pro>. Accessed 9th June 2022.
- [Richardson, 2020] Richardson, C. (2020). Pattern: Api gateway / backends for frontends. <https://microservices.io/about.html>. Accessed 9th June 2022.
- [Robinson, 2019] Robinson, M. (2019). What does federated login mean? a simple, detailed answer. <https://carvesystems.com/news/what-does-federated-login-mean-a-simple-detailed-answer/>. Accessed 1st June 2022.
- [SPD LOAD, 2019] SPD LOAD (2019). How much does it cost to develop an app in 2022? cost breakdown. <https://carvesystems.com/news/what-does-federated-login-mean-a-simple-detailed-answer/>. Accessed 1st June 2022.
- [techopedia, 2018] techopedia (2018). Wrapper. <https://www.techopedia.com/definition/4389/wrapper-software-engineering>. Accessed 9th June 2022.
- [UN, 2022] UN (2022). Stop food loss and waste, for the people, for the planet. *un.org*. <https://www.un.org/en/observances/end-food-waste-day>, Accessed 18th May 2022.
- [Vilimate, 2019] Vilimate (2019). Payment gateway integration in a mobile application. <https://vilimate.com/blog/payment-gateway-integration-in-a-mobile-application/>, Accessed 31st may 2022.
- [Waykar, 2015] Waykar, Y. (2015). role of use case diagram in software development. *International Journal of Management and Economics*. https://www.researchgate.net/publication/322991847_role_of_use_case_diagram_in_software_development. Accessed 1st June 2022.
- [Zoho, 2019] Zoho (2019). Online payment gateway – definition, working & benefits. <https://www.zoho.com/books/guides/payment-gateways.html>. Accessed 9th June 2022.