Datasheet - HC3-KNX

7" Capacitive Touch Panel with IP Connectivity and Door Phone Function



MAIN FEATURES


Control unit for KNX-based home and building automation installations, featuring a 7" TFT capacitive touch screen, integrated web server, and video door phone function. GLASS (full glass front) and CLASSIC (interchangeable front frames) models available.

- Function highlights:
 - o Control and monitoring of KNX devices
 - Simple, user-friendly navigation through floorplans and zones
 - Up to 512 configurable pages, with up to 8 control functions per page (more than 4000 functions)
 - Customizable background images
 - User-editable scenes
 - Weekly time schedules
 - Alarm monitoring with event log
 - o Presence simulation with day and night schedules
 - Event notifications by e-mail and GSM (*)
 - o Logic functions (logic gates, comparators, timers, etc.)
 - Four independent thermostats
 - o Touch gestures: 4 directional gestures + multitouch gesture
 - Video door phone function, with full duplex audio and echo cancellation (**)
 - IP camera monitoring (**)
- Remote control from smartphones, tablets, and PCs
- Integrated stereo loudspeakers and digital microphone
- Four multi-function inputs, individually configurable as binary or temperature probe inputs
- Real-time clock (RTC) with backup battery
- Integrated KNX bus coupling unit
- Very low power consumption

(*) DW-GSM expansion module required for GSM notifications (**) Please check compatibility

TECHNICAL SPECIFICATIONS

	Form factor	•	In-wall, flush mounted unit
Mechanical	Dimensions		228 x 156 x 36 / 39 mm (GLASS / CLASSIC)
	Weight		GLASS: 715 g (excl. mounting chassis) + 125 g (mounting chassis)
			CLASSIC: 650 g (excl. front frame) + 125 g (front frame)
	Mounting box		Wall mount-box, ref. E-C557
			Dimensions: 200 x 130 x 60 mm
Environment	Storage temperature		-2070 °C
	Operating temperature		-050 °C
	Relative humidity		1090% (non-condensing)
Power supply	Supply voltage		12 VDC ± 5%
	Power consumption		Typ. 2.3 W (energy saving) / 4.7 W (regular operation), max. 17 W
	Connection		Pluggable terminal block, 5.08 mm pitch
	Recommended wiring		Conductor section 1.5 mm ²
	Power supply unit		12 VDC / 25 W PSU, DIN-rail mounted. Width: 53 mm
	(included)		Input voltage 90-264 VAC @ 50-60 Hz
User interface	Display	Туре	Widescreen 7" TFT display (16:9)
		Resolution	1024 x 600 pixels
		Colour	24 bpp (16.7 million colours)
		Contrast	800:1 (typ.)
		Backlight	Low power white LED backlight, with energy saving mode
		Luminance	Typ. 210 / 400 cd/m ² (GLASS / CLASSIC), software controlled
		Viewing angle	Typ. 80x80° (L/R), 60x70° (Top/Bottom)
		Touch screen	Projected capacitive multitouch
		Cover glass	2mm high visibility glass (GLASS model only)
	Audio	Speakers	2W + 2W stereo loudspeakers
		Microphone	Integrated digital microphone



Datasheet - HC3-KNX

7" Capacitive Touch Panel with IP Connectivity and Door Phone Function




User interface	Misc.	Indicators	3-colour status led
			Buzzer
Communications	KNX	Туре	KNX TP1 bus
		Connection	Standard KNX TP1 connector
		Consumption	Typ. 5 mA, max. 10 mA @ 29 VDC
	Ethernet	Туре	Ethernet 10/100/1000 BASE-T interface
		Connection	RJ45 modular connector
		Rec. wiring	Twisted pair, 0.5 mm ² section (CAT5)
	Expansion	Туре	RS-485 bus
		Connection	Pluggable terminal block, 5.08 mm pitch
		Rec. wiring	Twisted pair, 0.5 mm ² section (CAT5)
Other ports	USB	Туре	USB 2.0
		Connection	USB type A connector
		Output power	600 mA max.
	Number of inputs		4 independent inputs
	Туре		Individually configurable as binary (pushbutton and switch/sensor
			modes) or temperature probe inputs
	Connection		Pluggable terminal block, 3.5 mm pitch
Inputs	Rec. wiring		Conductor section 0.2 to 1.5 mm ²
inputs	Binary inputs	Contact type	Dry voltage contact between the two input terminals
		Detection time	Typical 50 ms (switch/sensor mode)
		Pulse width	Minimum 10 ms (pushbutton mode)
		Cable length	Maximum recommended length: 50 m
	Temp. probe inputs		External temperature probe, ref. DW-TS-N1PB
Real time clock	Drift		± 20 ppm @ 25°C
	Battery backup		CR1220 3V, 35 mAh
Compliance	Directives		Directive 2014/30/EC
			Directive 2011/65/EC
	Standards		EN 50090-2-2
			EN 50491-5-1:2010
			EN 50491-5-2:2010
			EN 50581:2012


Specifications subject to change without notice




CONNECTORS AND OTHER ELEMENTS


GLASS Series






CLASSIC Series





- 1. Mounting chassis (GLASS) / Front frame (CLASSIC)
- 2. TFT touch screen + loudspeakers (hidden)
- Digital microphone
- 4. LED status indicator
- 5. Ethernet connector
- 6. Expansion connector (RS-485)
- 7. Multifunction inputs connector
- Power supply connector
- 9. KNX TP1 bus connector
- 10. USB connector

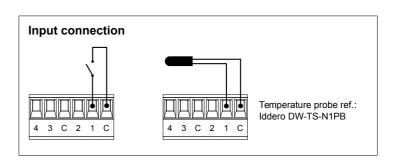

www.iddero.com Page 3

Datasheet - HC3-KNX







DIMENSIONS

(All dimensions in mm)


GLASS Series

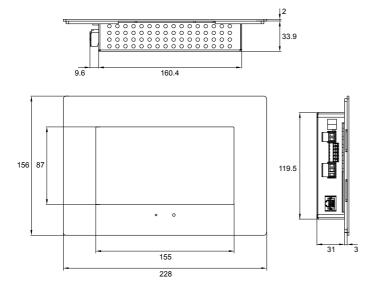



212


CLASSIC Series

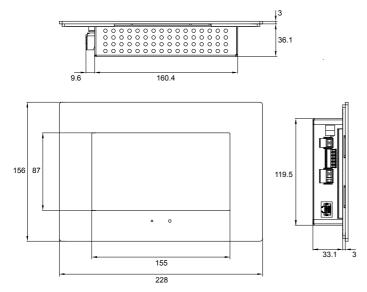




IMPORTANT: Only qualified electricians should install, service, or manipulate this equipment. Existing regulations for the prevention of accidents must be observed, as well as any national or local codes and regulations and standard safety precautions.

HC3-KNX





INSTALLATION NOTES: 1. Select installation height to allow for direct line of sight 2. Do not expose to direct sun light Z W

DE

INSTALLATIONSANMERKUNGEN:
1. Wählen Sie eine Installationshöhe, die eine direkte Blicklinie ermöglicht
2. Installieren Sie dieses Produkt nicht im direkten Sonnenlicht



NOTAS DE INSTALACIÓN: 1. Seleccionar la altura de instalación de forma que permita línea de visión directa 2. No instalar en lugares donde la luz solar incida directamente

吊




NOTES D'INSTALLATION:

1. Selectionnez la hauteur d'installation de façon qu'elle permette ligne de visée directe


2. Ne pas exposer directement au soleil

Art.-Nr. E-C557

4



KNX BUS




130 mm


INPUTS 12 VDC


RS-485


Ethernet


200 mm
















HC3-KNX CLASSIC







DE

INSTALLATIONSANMERKUNGEN:
1. Wählen Sie eine Installationshöhe, die eine direkte Blicklinie ermöglicht
2. Installieren Sie dieses Produkt nicht im direkten Sonnenlicht










吊


NOTES D'INSTALLATION:

1. Selectionnez la hauteur d'installation de façon qu'elle permette ligne de visée directe

2. Ne pas exposer directement au soleil

Art.-Nr. E-C557






INPUTS


RS-485

Ethernet

200 mm

KNX BUS 12 VDC





130 mm

