


IoTE Solo Mining Guide

www.iote.one

11-02-2019

1.

Visit the official IoTE website at <https://www.iote.one/> to download the latest version of IoTE's wallet program. Open the wallet client and make sure the sync is complete.

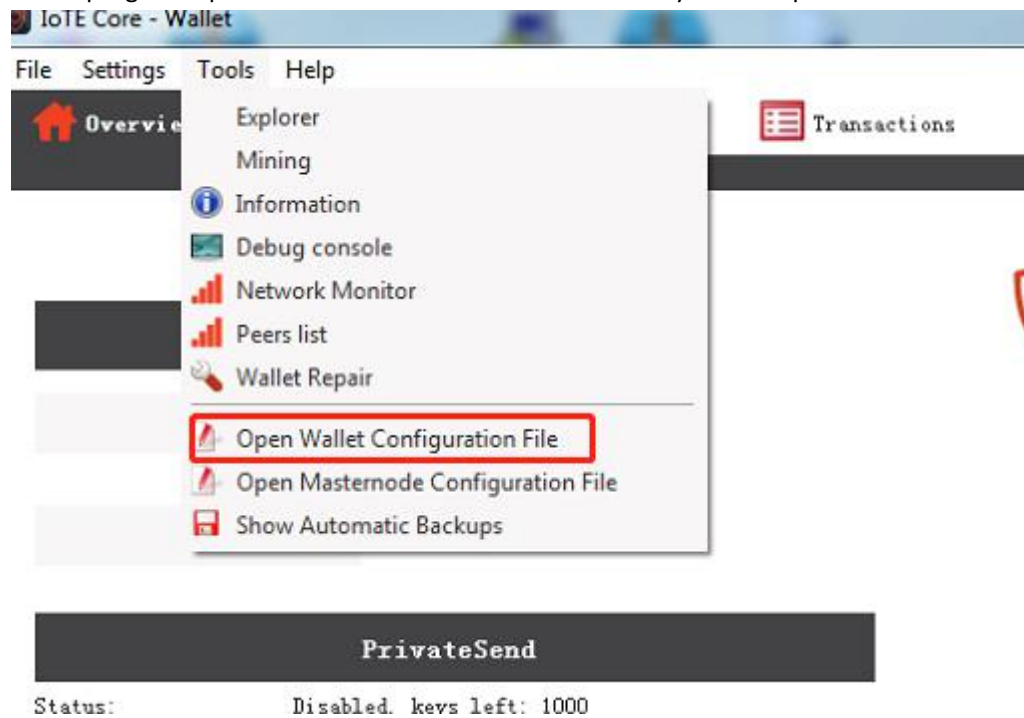

2.

Open the wallet profile (Tools)

Copy the following directly to paste:

rpcuser=1


rpcpassword=1

rpcport=9999

server=1


listen=1


daemon=1

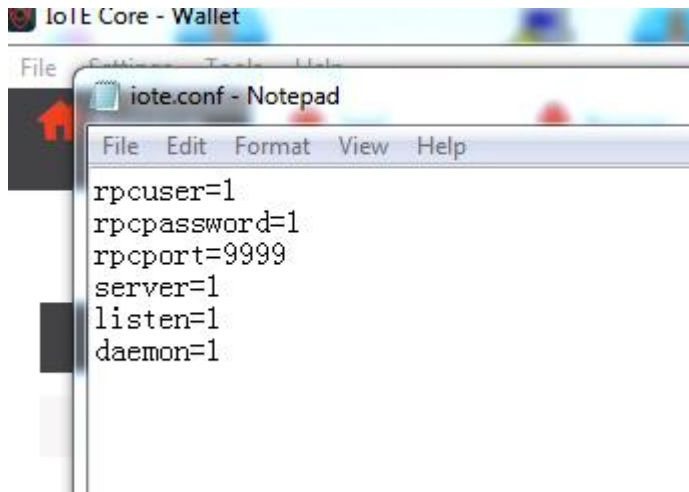

Save notepad

Restart the wallet client

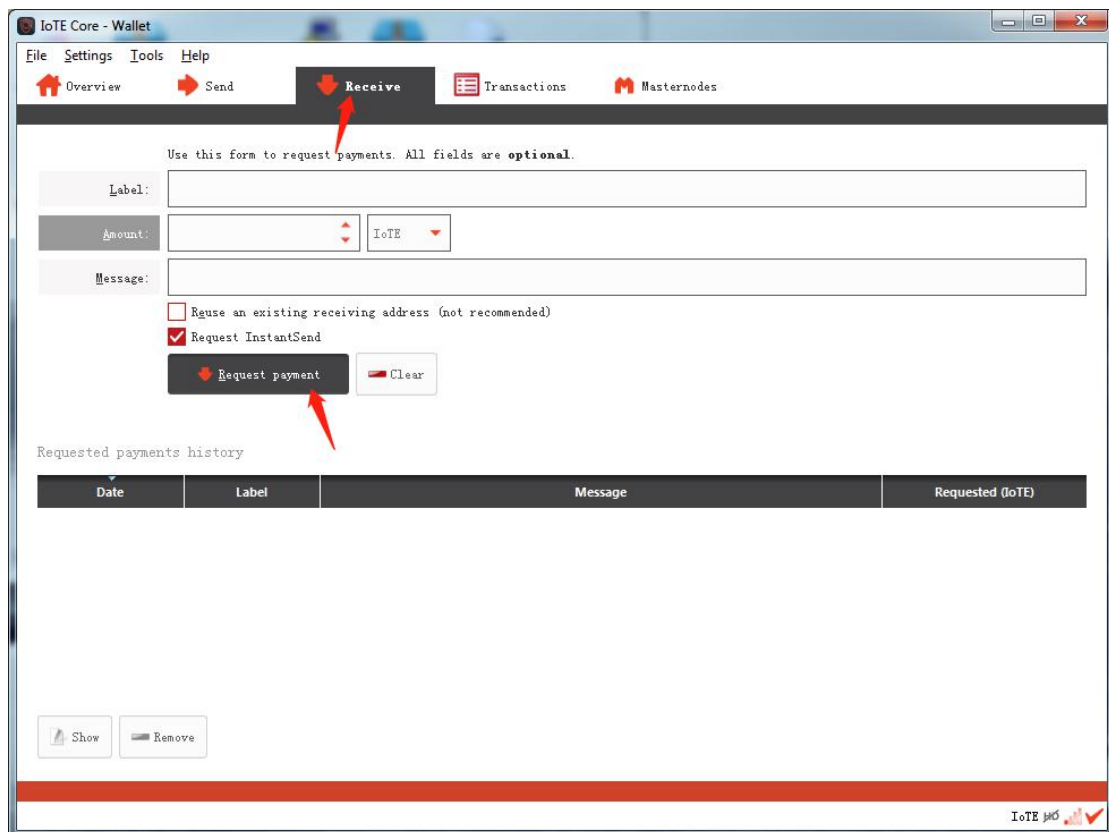

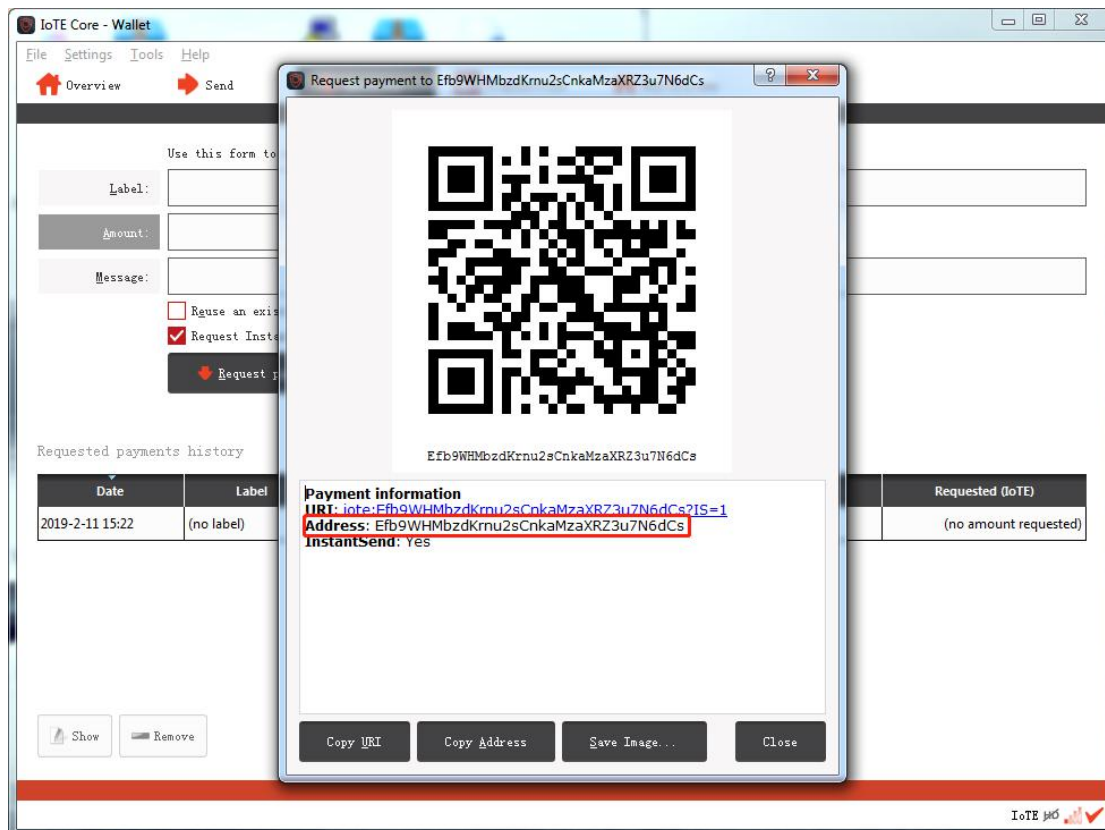

Remember the address

The above picture is: Efb9WHMbzdKrn2sCnkaMzaXRZ3u7N6dCs

Open config.json with Notepad

```
{
  "url" : "http://127.0.0.1:9999",
  "user" : "1",
  "pass" : "1",
  "coinbase-addr" : "EX2BqaFX5szoE8kcwJLmsegJrsy9Ha7xqE"
}
```



3.

Replace the address inside with your own Efb9WHMbzdKrn2sCnkaMzaXRZ3u7N6dCs

Keep the wallet open and run start miner.bat.



If you have any questions or suggestions, please contact: info@iote.one
www.iote.one