ITEM NO.	LINE SPEC.	NOTE
1		TWISTED WIRE
2		TWISTED WIRE
3		TWISTED WIRE
11		SINGLE WIRE

PIN NO.1	LINE NO.	WIRE SPEC.	LINE NO.	PIN NO.2
X1-A	X1-A-POWER VCC		PWR(CON1)-2-POWER VCC	PWR(CON1)-2
X1-B	X1-C-POWER GND		PWR(CON1)-1-POWER GND	PWR(CON1)-1
X1-C				
X1-D	X1-D-LIVE(in)			
X1-E	X1-E-LIVE(out)		PEI(J8)-18-LIVE	PEI(J8)-18
X1-F	X1-F-LIVE ADD GND(in)		PEI(J8)-19-LIVE ADD GND(in)	PEI(J8)-19
X1-G	X1-G-LIVE ADD GND(out)		PEI(J8)-20-LIVE ADD GND(out)	PEI(J8)-20
X1-H				
X1-J				
X1-K	X1-K-PEI RX+(out)		PEI(J8)-5-PEI RX+(out)	PEI(J8)-5
X1-L	X1-L-PEI RX-(out)		PEI(J8)-7-PEI RX-(out)	PEI(J8)-7
X1-M	X1-M-PEI RX SH(out)		PEI(J8)-22-PEI RX SH(out)	PEI(J8)-22
X1-N	X1-N-PEI TX+(out)		PEI(J8)-9-PEI TX+(out)	PEI(J8)-9
X1-P	X1-P-PEI TX-(out)		PEI(J8)-11-PEI TX-(out)	PEI(J8)-11
X1-R				
X1-S	X1-S-PEI RX+(in)		PEI(J8)-4-PEI RX+(in)	PEI(J8)-4
X1-T	X1-T-PEI RX-(in)		PEI(J8)-6-PEI RX-(in)	PEI(J8)-6
X1-U	X1-U-PEI RX SH(in)		PEI(J8)-21-PEI RX SH(in)	PEI(J8)-21
X1-V	X1-V-PEI TX+(in)		PEI(J8)-8-PEI TX+(in)	PEI(J8)-8
X1-W	X1-W-PEI TX-(in)		PEI(J8)-10-PEI TX-(in)	PEI(J8)-10
X1-X				
X1-Z				
X1-a	X1-a-DUAL TONE+(out)		PEI(J8)-13-DUAL TONE+(out)	PEI(J8)-13
X1-b	X1-b-DUAL TONE-(out)		PEI(J8)-15-DUAL TONE-(out)	PEI(J8)-15
X1-c	X1-c-DUAL TONE SH(out)		PEI(J8)-12-DUAL TONE SH(out)	PEI(J8)-17
X1-d	X1-d-DUAL TONE+(in)		PEI(J8)-12-DUAL TONE+(in)	PEI(J8)-12
X1-e	X1-e-DUAL TONE-(in)		PEI(J8)-14-DUAL TONE-(in)	PEI(J8)-14
X1-f	X1-f-DUAL TONE SH(in)		PEI(J8)-16-DUAL TONE SH(in)	PEI(J8)-16
X1-g				
X1-h	X1-h-PA+(in)			
X1-j	X1-j-PA-(in)			
X1-k	X1-k-PA SH (in)			
X1-m	X1-m-PA+(out)			
X1-n	X1-n-PA-(out)			
X1-p	X1-p-PA SH(out)			
X1-r				
X1-s				
PWR(CON2)-8	PWR(CON2)-8- +5V		PEI(J6)-8-+5V	PEI(J6)-8
PWR(CON2)-7	PWR(CON2)-7-GND		PEI(J6)-7-GND	PEI(J6)-7
PWR(CON2)-6	PWR(CON2)-6-+12V		PEI(J6)-6-+12V	PEI(J6)-6
PWR(CON2)-5	PWR(CON2)-5-GND		PEI(J6)-5-GND	PEI(J6)-5
PWR(CON2)-4	PWR(CON2)-4-+24V		PEI(J6)-4-+24V	PEI(J6)-4
PWR(CON2)-3	PWR(CON2)-3-+24V		PEI(J6)-3-+24V	PEI(J6)-3
PWR(CON2)-2	PWR(CON2)-2-GND		PEI(J6)-2-GND	PEI(J6)-2
PWR(CON2)-1	PWR(CON2)-1-GND		PEI(J6)-1-GND	PEI(J6)-1

Ab

Aa

Ab

: 는 커넥터PIN에서 연결시킬 것.

: 는 커넥터PIN에서 연결시킬 것.

군번 GROUP NO.					품번 ITEM		품 명 DESCRIPTION	사 양 SPEC	도면번호 DWG NO.	-	품번 및 군번	중량 . 길이 폭 x 길이	표면처리 S/TREATMENT
				1									
				1	1		WIRE	100G0121-0.75-0/9,RAYCHEM					
				1	2		WIRE	100G1121-0.5-0/9,RAYCHEM					
				1	3		WIRE	100G1141-0.5-0/9,RAYCHEM					
				1	4		CONNECTOR(CON2)	SMH250-08/YEONHO					
				1	5		CONNECTOR(CON1)	039012060(5557-06R)/MOLEX					
				3	6		CONNECTOR(J3,J9)	35572-0400/MOLEX					
				2	7		CONNECTOR(J6,J7)	35572-0800/MOLEX					
				1	8		CONNECTOR(J1)	35572-0500/MOLEX					
				1	9		CONNECTOR(J8)	039012220(5557-22R)/MOLEX					
				69	10		TERMINAL	5556,18-24 AWG					
				1	11		WIRE	100G01111-0.5-0,RAYCHEM					

X1: PIN ASSIGNMENT [ITH03FPA28-21PB0G1F6]



NO.	ITEM	NO.	ITEM
A	POWER1-VCC	a	DUAL TONE+(out)
B	POWER1-GND	b	DUAL TONE-(out)
C		c	DUAL TONE SH(out)
D	LIVE (in)	d	DUAL TONE+(in)
E	LIVE (out)	e	DUAL TONE-(in)
F	LIVE ADD GND(in)	f	DUAL TONE SH(in)
G	LIVE ADD GND(out)	g	
H		h	PA+ (in)
J		j	PA- (in)
K	PEI RX+(out)	k	PA SH (in)
L	PEI RX-(out)	m	PA+ (out)
M	PEI RX SH(out)	n	PA- (out)
N	PEI TX+(out)	p	PA SH (out)
P	PEI TX-(out)	r	
R		s	
S	PEI RX+(in)		
T	PEI RX-(in)		
U	PEI RX SH(in)		
V	PEI TX+(in)		
W	PEI TX-(in)		
X			
Z			

Ab

DIAGRAM

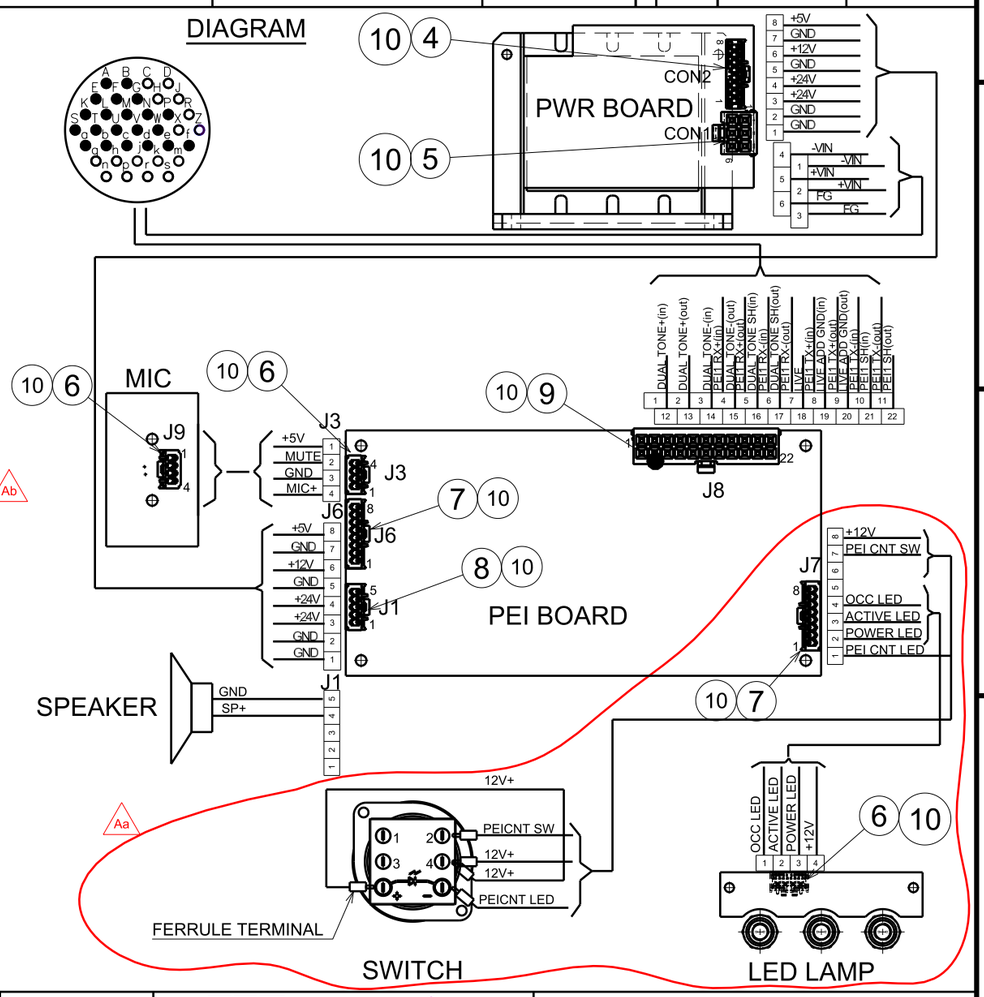

Aa

개정 CHANGE					
Redraw 2012.03.12	DGN H.Y.SHIN	APP B.J.JONE	A		
Line No. changed. 2012.12.21	DGN H.Y.SHIN	APP B.J.JONE	Aa		
Line No. changed. 2013.04.01	DGN H.Y.SHIN	APP B.J.JONE	Ab		

GENERAL TOLERANCE (WMS-C-40201)		
DIMENSION	WELDING	MACHING
0.5 ~ >6mm	±0.3	±0.1
6 ~ >30mm	±0.5	±0.2
30 ~ >120mm	±0.8	±0.3
120 ~ >400mm	±1.2	±0.5
400 ~ >1000mm	±2.0	±0.8
1000 ~ >2000mm	±3.0	±1.2
2000 ~ >4000mm	±4.0	±2.0
4000 ~ >5000mm	±5.0	±3.0
5000 ~ >8000mm	±7.0	±5.0
8000 ~ >12500mm	±9.0	±7.0
12500 ~ >22400mm	±12.0	±9.0
DIMENSION	CASTING	
~ >120mm	±2.0	
120 ~ >315mm	±2.5	
315 ~ >630mm	±3.5	
630 ~ >1250mm	±5.0	
1250 ~ >2500mm	±7.0	
2500 ~ >5000mm	±10.0	

공차 적용기준 : WMS C 40201

설계MEMO

DIM. IN mm	작성일 DATE	2011.10.26	승인 APPROVED
척도 SCALE	작성 DRAWN	B.H.KANG	B.J.JONE
1 / 1	설계 DESIGNED	-	
	검토 CHECKED	J.Y.LEE	

WOOJIN Industrial Systems Co., Ltd.

DENVER RTD FASTRACKS

PEI2 WIRING DIAGRAM

R1D000447

Aa