

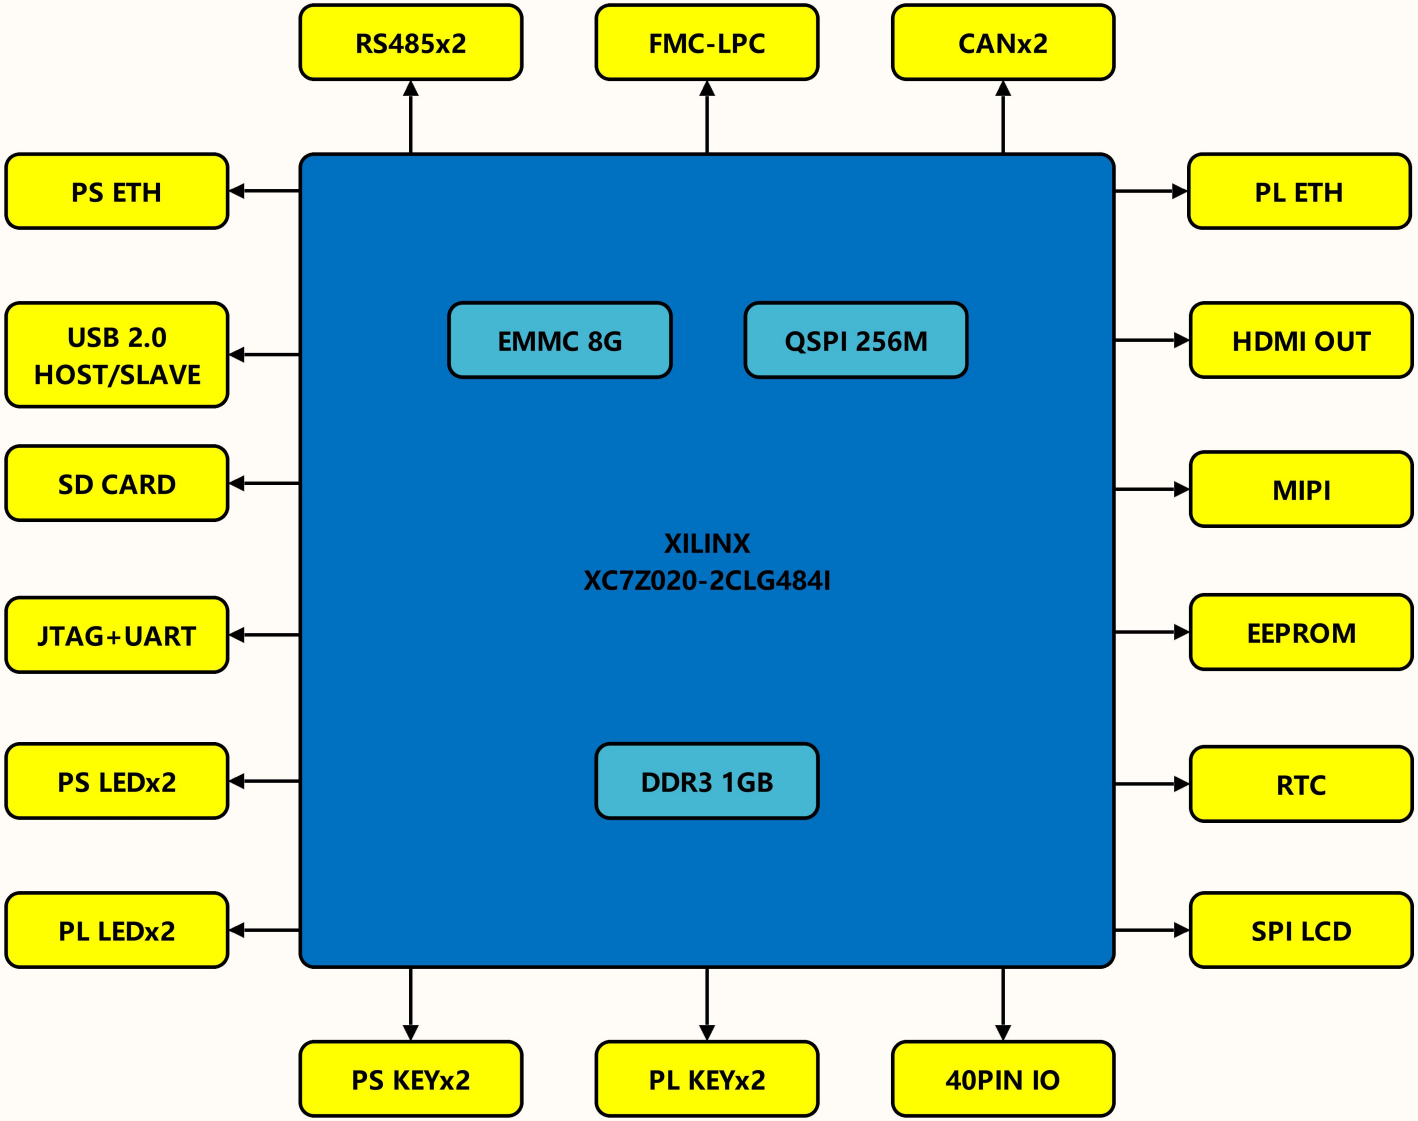
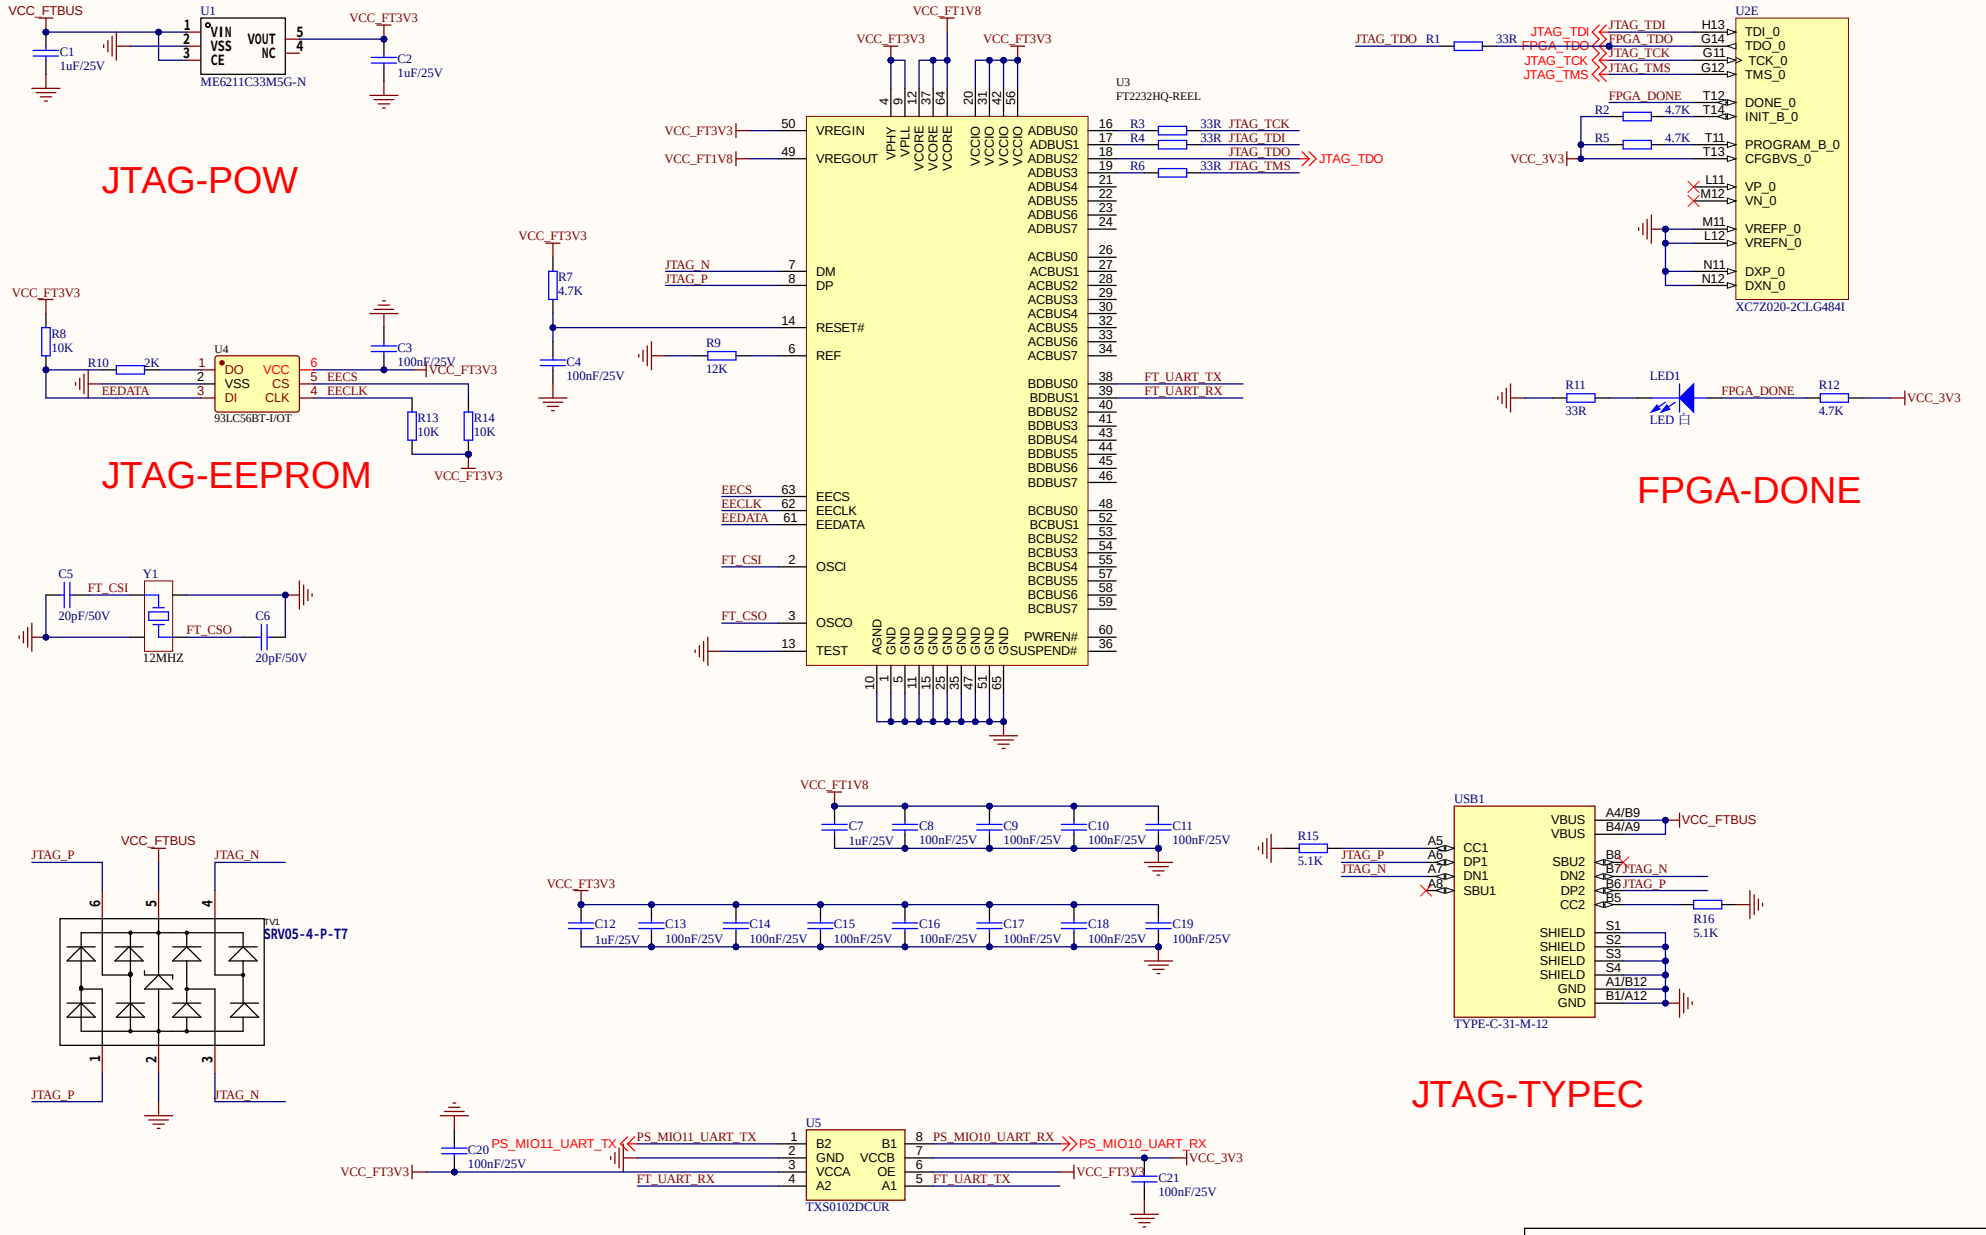


1.FMC LPC PTP ZEDBOARD
2.40PIN兼容黑金


南京江河汇泓科技有限公司	
TITLE JH-ZYNQ7020	REV V1.0
PAGE01 ZYNQ7020-F-BLOCK	SIZE A3
DATE: 2026/10/22	SHEET 1 OF 15


JTAG-POW
JTAG-EEPROM
FPGA-DONE
JTAG-TYPEC
U1
ME6211C33M5G-N
U3
FT2232HQ-REEL
U2E
XC7Z020-2CLG484I
U4
93LC56BT-I/OT
U5
TXS0102DCUR
USB1
TYPE-C-31-M-12
TV1
SRV05-4-P-T7
Y1
12MHZ
LED1
南京江河汇泓科技有限公司
TITLE
JH-ZYNQ7020
REV
V1.0
PAGE02 FPGA-BANK0
SIZE
A3
DATE: 2026/10/22
SHEET 2 OF 15

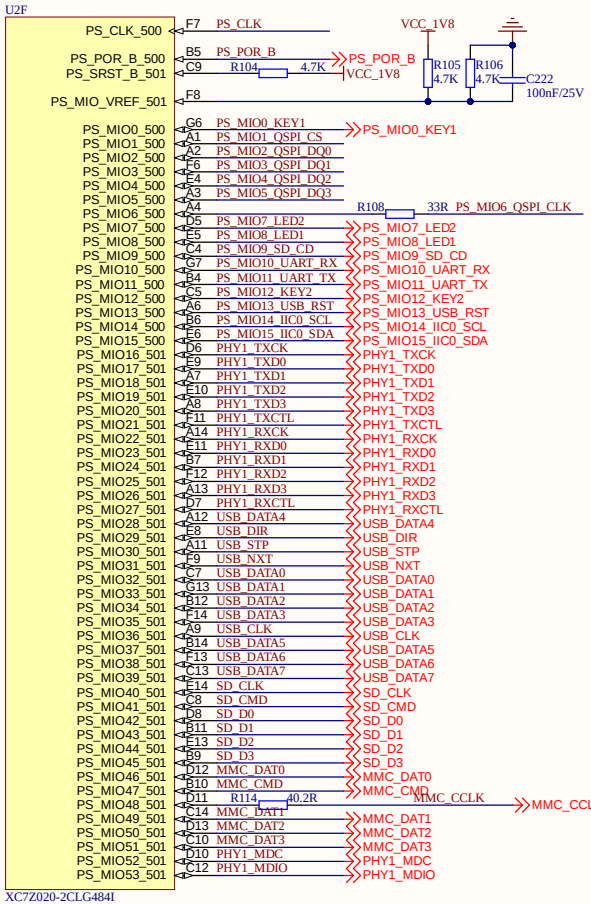


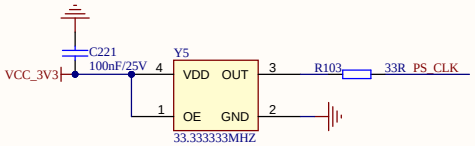


PS CLK

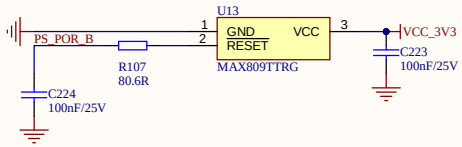


监控复位



复位按键

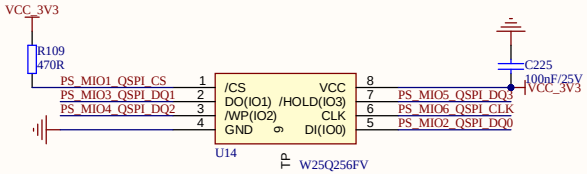

QSPI FLASH

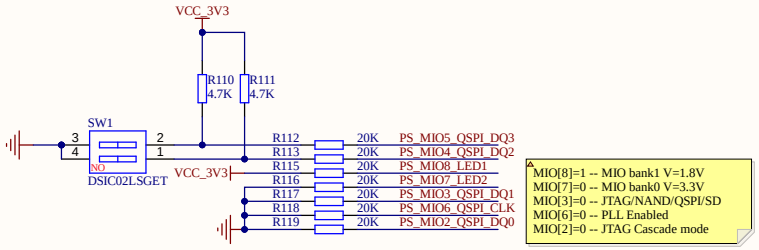


BOOT

	MIO 4	MIO 5
BOOT_CFG	1	2
JTAG	ON	ON
NAND	OFF	ON
QSPI	ON	OFF
SD Card	OFF	OFF


南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE03 FPGA-BANK500 501	SIZE: A3
DATE: 2026/10/22	SHEET 3 OF 15

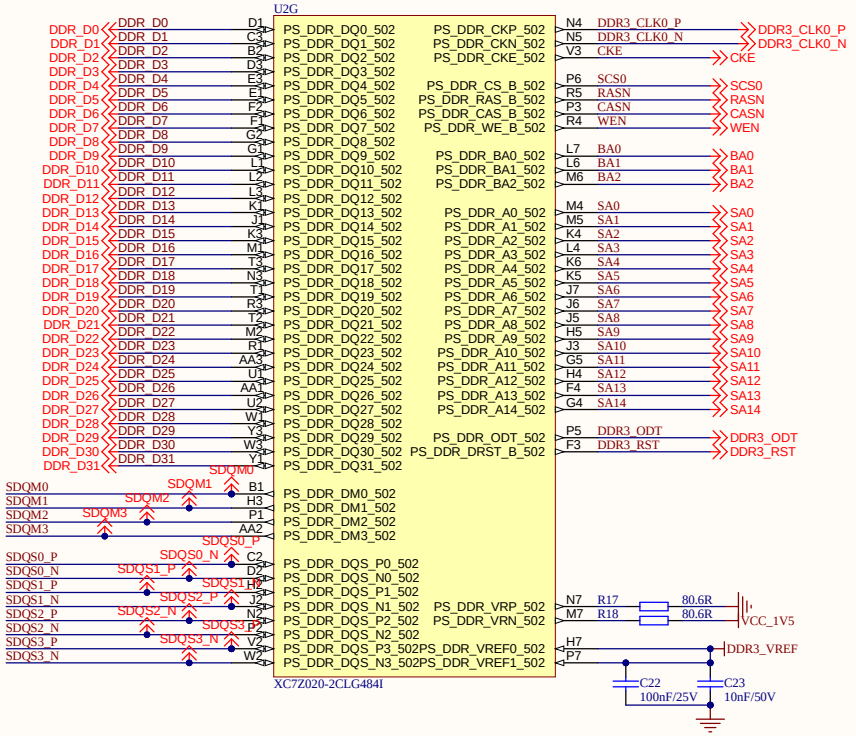



南京江河汇泓科技有限公司	
TITLE: JH-ZYNQ7020	REV: V1.0
PAGE04 FPGA-BANK502	SIZE: A3
DATE: 2026/10/22	SHEET 4 OF 15



U2A
BANK 13
IO_0_13
IO_L1P_T0_13
IO_L1N_T0_13
IO_L2P_T0_13
IO_L2N_T0_13
IO_L3P_T0_DQS_13
IO_L3N_T0_DQS_13
IO_L4P_T0_13
IO_L4N_T0_13
IO_L5P_T0_13
IO_L5N_T0_13
IO_L6P_T0_13
IO_L6N_T0_VREF_13
IO_L7P_T1_13
IO_L7N_T1_13
IO_L8P_T1_13
IO_L8N_T1_13
IO_L9P_T1_DQS_13
IO_L9N_T1_DQS_13
IO_L10P_T1_13
IO_L10N_T1_13
IO_L11P_T1_SRCC_13
IO_L11N_T1_SRCC_13
IO_L12P_T1_MRCC_13
IO_L12N_T1_MRCC_13
IO_L13P_T2_MRCC_13
IO_L13N_T2_MRCC_13
IO_L14P_T2_SRCC_13
IO_L14N_T2_SRCC_13
IO_L15P_T2_DQS_13
IO_L15N_T2_DQS_13
IO_L16P_T2_13
IO_L16N_T2_13
IO_L17P_T2_13
IO_L17N_T2_13
IO_L18P_T2_13
IO_L18N_T2_13
IO_L19P_T3_13
IO_L19N_T3_VREF_13
IO_L20P_T3_13
IO_L20N_T3_13
IO_L21P_T3_DQS_13
IO_L21N_T3_DQS_13
IO_L22P_T3_13
IO_L22N_T3_13
IO_L23P_T3_13
IO_L23N_T3_13
IO_L24P_T3_13
IO_L24N_T3_13
IO_25_13
R7 FMC_SCL
V10 IO2_P
V9 IO2_N
V8 IO9_P
W8 IO9_N
W11 IO10_P
W10 IO10_N
V12 IO1_P
W12 IO1_N
U12 IO6_P
U11 IO6_N
U10 IO3_P
U9 IO3_N
AA12 IO4_P
AB12 IO4_N
AA11 IO8_P
AB11 IO8_N
AB10 IO7_P
AB9 IO7_N
Y11 IO5_P
Y10 IO5_N
AA9 IO12_P
AA8 IO12_N
Y9 MIPI_CLK_P
Y8 MIPI_CLK_N
Y6 IO15_P
Y5 IO15_N
AA7 IO14_P
AA6 IO14_N
AB2 IO17_P
AB1 IO17_N
AB5 IO13_P
AB4 IO13_N
AB7 IO11_P
AB6 IO11_N
Y4 IO16_P
AA4 IO16_N
R6 MIPI_LP0_P
T6 MIPI_LP0_N
T4 MIPI_LAN1_P
U4 MIPI_LAN1_N
V5 CAM_SCL
V4 CAM_SDA
U6 MIPI_LPCLK_P
U5 MIPI_LPCLK_N
V7 MIPI_LP1_P
W7 MIPI_LP1_N
W6 MIPI_LAN0_P
W5 MIPI_LAN0_N
U7 FMC_SDA
FMC_SCL
B13_L1_P
B13_L1_N
B13_L2_P
B13_L2_N
B13_L3_P
B13_L3_N
B13_L4_P
B13_L4_N
B13_L5_P
B13_L5_N
B13_L6_P
B13_L6_N
B13_L7_P
B13_L7_N
B13_L8_P
B13_L8_N
B13_L9_P
B13_L9_N
B13_L10_P
B13_L10_N
B13_L11_P
B13_L11_N
MIPI_CLK_P
MIPI_CLK_N
B13_L13_P
B13_L13_N
B13_L14_P
B13_L14_N
B13_L15_P
B13_L15_N
B13_L16_P
B13_L16_N
B13_L17_P
B13_L17_N
B13_L18_P
B13_L18_N
MIPI_LP0_P
MIPI_LP0_N
MIPI_LAN1_P
MIPI_LAN1_N
CAM_SCL
CAM_SDA
MIPI_LPCLK_P
MIPI_LPCLK_N
MIPI_LP1_P
MIPI_LP1_N
MIPI_LAN0_P
MIPI_LAN0_N
FMC_SDA
XC7Z020-2CLG484I
U2B
BANK 33
IO_0_33
IO_L1P_T0_33
IO_L1N_T0_33
IO_L2P_T0_33
IO_L2N_T0_33
IO_L3P_T0_DQS_33
IO_L3N_T0_DQS_33
IO_L4P_T0_33
IO_L4N_T0_33
IO_L5P_T0_33
IO_L5N_T0_33
IO_L6P_T0_33
IO_L6N_T0_VREF_33
IO_L7P_T1_33
IO_L7N_T1_33
IO_L8P_T1_33
IO_L8N_T1_33
IO_L9P_T1_DQS_33
IO_L9N_T1_DQS_33
IO_L10P_T1_33
IO_L10N_T1_33
IO_L11P_T1_SRCC_33
IO_L11N_T1_SRCC_33
IO_L12P_T1_MRCC_33
IO_L12N_T1_MRCC_33
IO_L13P_T2_MRCC_33
IO_L13N_T2_MRCC_33
IO_L14P_T2_SRCC_33
IO_L14N_T2_SRCC_33
IO_L15P_T2_DQS_33
IO_L15N_T2_DQS_33
IO_L16P_T2_33
IO_L16N_T2_33
IO_L17P_T2_33
IO_L17N_T2_33
IO_L18P_T2_33
IO_L18N_T2_33
IO_L19P_T3_33
IO_L19N_T3_VREF_33
IO_L20P_T3_33
IO_L20N_T3_33
IO_L21P_T3_DQS_33
IO_L21N_T3_DQS_33
IO_L22P_T3_33
IO_L22N_T3_33
IO_L23P_T3_33
IO_L23N_T3_33
IO_L24P_T3_33
IO_L24N_T3_33
IO_25_33
U19 LCD_SDA
T21 PHY2_TXD0
U21 PHY2_TXD1
T22 RS485_TXD2
U22 RS485_DE2
V22 RS485_RXD2
W22 RS485_TXD1
W20 PHY2_RXD0
V21 PHY2_RXD1
U20 PHY2_RXD2
V20 PHY2_RXD3
V18 LCD_SCL
V19 PHY2_RXCTL
AA22 PHY2_TXD2
AB22 PHY2_TXCK
AA21 PHY2_TXD3
AB21 PHY2_TXCTL
T20 RS485_DE1
T21 PHY2_RST
AB19 PHY2_MDIO
AB20 PHY2_MDC
Y19 PHY2_RXCK
AA19 RS485_RXD1
Y18 HDMI1_HPD
AA18 LCD_RST
W17 R120 33R PL_CLK
W18 PL_KEY1
W16 HDMI1_CLK_P
Y16 HDMI1_CLK_N
U15 HDMI1_DATA2_P
V16 HDMI1_DATA2_N
U17 HDMI1_DATA1_P
V17 HDMI1_DATA1_N
AA17 HDMI1_DATA0_P
AB17 HDMI1_DATA0_N
AA16 HDMI1_SCL
AB16 HDMI1_SDA
Y14 PL_KEY2
Y15 PL_LED1
Y13 PL_LED2
W13 LCD_DC
W15 CAN2_RX
Y15 CAN2_TX
Y14 CAN1_RX
AA14 CAN1_TX
Y13 LCD_LED
AA13 LCD_CS
AB14 FMC_PRSNT
AB15 CAM_GPIO
U14 CAM_CLK
LCD_SDA
PHY2_TXD0
PHY2_TXD1
RS485_TXD2
RS485_DE2
RS485_RXD2
RS485_TXD1
PHY2_RXD0
PHY2_RXD1
PHY2_RXD2
PHY2_RXD3
LCD_SCL
PHY2_RXCTL
PHY2_TXD2
PHY2_TXCK
PHY2_TXD3
PHY2_TXCTL
RS485_DE1
PHY2_RST
PHY2_MDIO
PHY2_MDC
PHY2_RXCK
RS485_RXD1
HDMI1_HPD
LCD_RST
PL_CLK
PL_KEY1
HDMI1_CLK_P
HDMI1_CLK_N
HDMI1_DATA2_P
HDMI1_DATA2_N
HDMI1_DATA1_P
HDMI1_DATA1_N
HDMI1_DATA0_P
HDMI1_DATA0_N
HDMI1_SCL
HDMI1_SDA
PL_KEY2
PL_LED1
PL_LED2
LCD_DC
CAN2_RX
CAN2_TX
CAN1_RX
CAN1_TX
LCD_LED
LCD_CS
FMC_PRSNT
CAM_GPIO
CAM_CLK
XC7Z020-2CLG484I
U2C
BANK 34
IO_0_34
IO_L1P_T0_34
IO_L1N_T0_34
IO_L2P_T0_34
IO_L2N_T0_34
IO_L3P_T0_DQS_PUDC_B_34
IO_L3N_T0_DQS_34
IO_L4P_T0_34
IO_L4N_T0_34
IO_L5P_T0_34
IO_L5N_T0_34
IO_L6P_T0_34
IO_L6N_T0_VREF_34
IO_L7P_T1_34
IO_L7N_T1_34
IO_L8P_T1_34
IO_L8N_T1_34
IO_L9P_T1_DQS_34
IO_L9N_T1_DQS_34
IO_L10P_T1_34
IO_L10N_T1_34
IO_L11P_T1_SRCC_34
IO_L11N_T1_SRCC_34
IO_L12P_T1_MRCC_34
IO_L12N_T1_MRCC_34
IO_L13P_T2_MRCC_34
IO_L13N_T2_MRCC_34
IO_L14P_T2_SRCC_34
IO_L14N_T2_SRCC_34
IO_L15P_T2_DQS_34
IO_L15N_T2_DQS_34
IO_L16P_T2_34
IO_L16N_T2_34
IO_L17P_T2_34
IO_L17N_T2_34
IO_L18P_T2_34
IO_L18N_T2_34
IO_L19P_T3_34
IO_L19N_T3_VREF_34
IO_L20P_T3_34
IO_L20N_T3_34
IO_L21P_T3_DQS_34
IO_L21N_T3_DQS_34
IO_L22P_T3_34
IO_L22N_T3_34
IO_L23P_T3_34
IO_L23N_T3_34
IO_L24P_T3_34
IO_L24N_T3_34
IO_25_34
H15
J15
K15
J16 FMC_LA15_P
J17 FMC_LA15_N
K16 R121 1K VCC_ADJ1
L16
L17 FMC_LA13_P
M17 FMC_LA13_N
N17 FMC_LA11_P
N18 FMC_LA11_N
M15
M16 FMC_VREF
J18 FMC_LA05_P
K18 FMC_LA05_N
J21 FMC_LA08_P
J22 FMC_LA08_N
J20 FMC_LA16_P
K21 FMC_LA16_N
L21 FMC_LA06_P
L22 FMC_LA06_N
K19 FMC_LA14_P
K20 FMC_LA14_N
L18 FMC_CLK0_P
L19 FMC_CLK0_N
M19 FMC_LA00_CC_P
M20 FMC_LA00_CC_N
N19 FMC_LA01_CC_P
N20 FMC_LA01_CC_N
M21 FMC_LA04_P
M22 FMC_LA04_N
N22 FMC_LA03_P
P22 FMC_LA03_N
R20 FMC_LA09_P
R21 FMC_LA09_N
P20 FMC_LA12_P
P21 FMC_LA12_N
N15
P15 FMC_VREF
P17 FMC_LA02_P
P18 FMC_LA02_N
T16 FMC_LA07_P
T17 FMC_LA07_N
R19 FMC_LA10_P
T19 FMC_LA10_N
R18
T18
P16
R16
R15
FMC_LA15_P
FMC_LA15_N
VCC_ADJ1
FMC_LA13_P
FMC_LA13_N
FMC_LA11_P
FMC_LA11_N
FMC_LA05_P
FMC_LA05_N
FMC_LA08_P
FMC_LA08_N
FMC_LA16_P
FMC_LA16_N
FMC_LA06_P
FMC_LA06_N
FMC_LA14_P
FMC_LA14_N
FMC_CLK0_P
FMC_CLK0_N
FMC_LA00_CC_P
FMC_LA00_CC_N
FMC_LA01_CC_P
FMC_LA01_CC_N
FMC_LA04_P
FMC_LA04_N
FMC_LA03_P
FMC_LA03_N
FMC_LA09_P
FMC_LA09_N
FMC_LA12_P
FMC_LA12_N
FMC_LA02_P
FMC_LA02_N
FMC_LA07_P
FMC_LA07_N
FMC_LA10_P
FMC_LA10_N
XC7Z020-2CLG484I
U2D
BANK 35
IO_0_35
IO_L1P_T0_AD0P_35
IO_L1N_T0_AD0N_35
IO_L2P_T0_AD8P_35
IO_L2N_T0_AD8N_35
IO_L3P_T0_DQS_AD1P_35
IO_L3N_T0_DQS_AD1N_35
IO_L4P_T0_35
IO_L4N_T0_35
IO_L5P_T0_AD9P_35
IO_L5N_T0_AD9N_35
IO_L6P_T0_35
IO_L6N_T0_VREF_35
IO_L7P_T1_AD2P_35
IO_L7N_T1_AD2N_35
IO_L8P_T1_AD10P_35
IO_L8N_T1_AD10N_35
IO_L9P_T1_DQS_AD3P_35
IO_L9N_T1_DQS_AD3N_35
IO_L10P_T1_AD11P_35
IO_L10N_T1_AD11N_35
IO_L11P_T1_SRCC_35
IO_L11N_T1_SRCC_35
IO_L12P_T1_MRCC_35
IO_L12N_T1_MRCC_35
IO_L13P_T2_MRCC_35
IO_L13N_T2_MRCC_35
IO_L14P_T2_AD4P_SRCC_35
IO_L14N_T2_AD4N_SRCC_35
IO_L15P_T2_DQS_AD12P_35
IO_L15N_T2_DQS_AD12N_35
IO_L16P_T2_35
IO_L16N_T2_35
IO_L17P_T2_AD5P_35
IO_L17N_T2_AD5N_35
IO_L18P_T2_AD13P_35
IO_L18N_T2_AD13N_35
IO_L19P_T3_35
IO_L19N_T3_VREF_35
IO_L20P_T3_AD6P_35
IO_L20N_T3_AD6N_35
IO_L21P_T3_DQS_AD14P_35
IO_L21N_T3_DQS_AD14N_35
IO_L22P_T3_AD7P_35
IO_L22N_T3_AD7N_35
IO_L23P_T3_35
IO_L23N_T3_35
IO_L24P_T3_AD15P_35
IO_L24N_T3_AD15N_35
IO_25_35
H17
J16
E16
D16
D17
E15 FMC_LA23_P
D15 FMC_LA23_N
G15 FMC_LA19_P
G16 FMC_LA19_N
F18 FMC_LA26_P
E18 FMC_LA26_N
G17
F17 FMC_VREF
C15 FMC_LA30_P
B15 FMC_LA30_N
B16 FMC_LA31_P
B17 FMC_LA31_N
A16 FMC_LA28_P
A17 FMC_LA28_N
A18 FMC_LA24_P
A19 FMC_LA24_N
C17 FMC_LA29_P
C18 FMC_LA29_N
D18 FMC_CLK1_P
C19 FMC_CLK1_N
B19 FMC_LA17_CC_P
B20 FMC_LA17_CC_N
D20 FMC_LA18_CC_P
C20 FMC_LA18_CC_N
A21 FMC_LA32_P
A22 FMC_LA32_N
D22 FMC_LA25_P
C22 FMC_LA25_N
E21 FMC_LA27_P
D21 FMC_LA27_N
B21 FMC_LA33_P
B22 FMC_LA33_N
H19
F20 FMC_VREF
G19 FMC_LA22_P
F19 FMC_LA22_N
E19 FMC_LA21_P
E20 FMC_LA21_N
G20 FMC_LA20_P
G21 FMC_LA20_N
F21
E22
H22
G22
H18
FMC_LA23_P
FMC_LA23_N
FMC_LA19_P
FMC_LA19_N
FMC_LA26_P
FMC_LA26_N
FMC_VREF
FMC_LA30_P
FMC_LA30_N
FMC_LA31_P
FMC_LA31_N
FMC_LA28_P
FMC_LA28_N
FMC_LA24_P
FMC_LA24_N
FMC_LA29_P
FMC_LA29_N
FMC_CLK1_P
FMC_CLK1_N
FMC_LA17_CC_P
FMC_LA17_CC_N
FMC_LA18_CC_P
FMC_LA18_CC_N
FMC_LA32_P
FMC_LA32_N
FMC_LA25_P
FMC_LA25_N
FMC_LA27_P
FMC_LA27_N
FMC_LA33_P
FMC_LA33_N
FMC_LA22_P
FMC_LA22_N
FMC_LA21_P
FMC_LA21_N
FMC_LA20_P
FMC_LA20_N
XC7Z020-2CLG484I
C226
100nF/25V
Y6
VCC_3V3
4
VDD
OUT
3
PL_CLK
1
OE
GND
2
50M
PL CLK
南京江河汇泓科技有限公司
TITLE
JH-ZYNQ7020
REV
V1.0
PAGE05 FPGA-BANK13 33 34 35
SIZE
A3
DATE: 2026/10/22
SHEET 5 OF 15

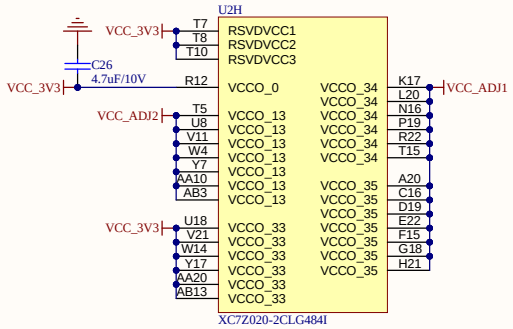


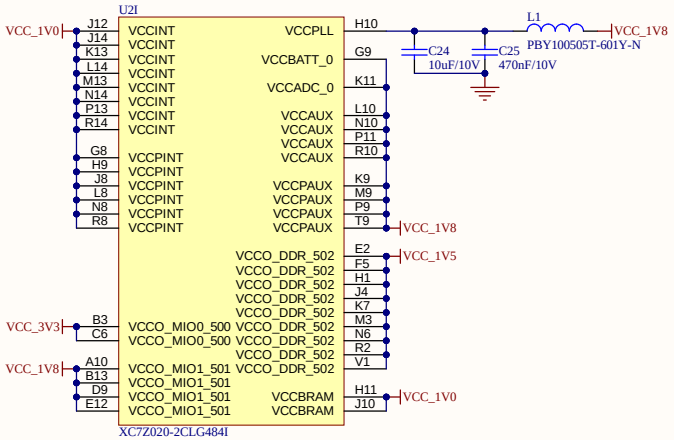


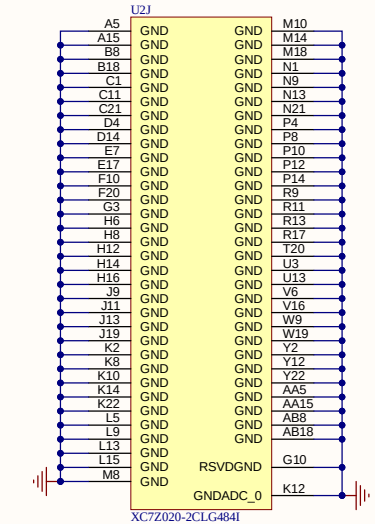



































南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE06 FPGA-POW	SIZE: A3
DATE: 2026/10/22	SHEET 6 OF 15

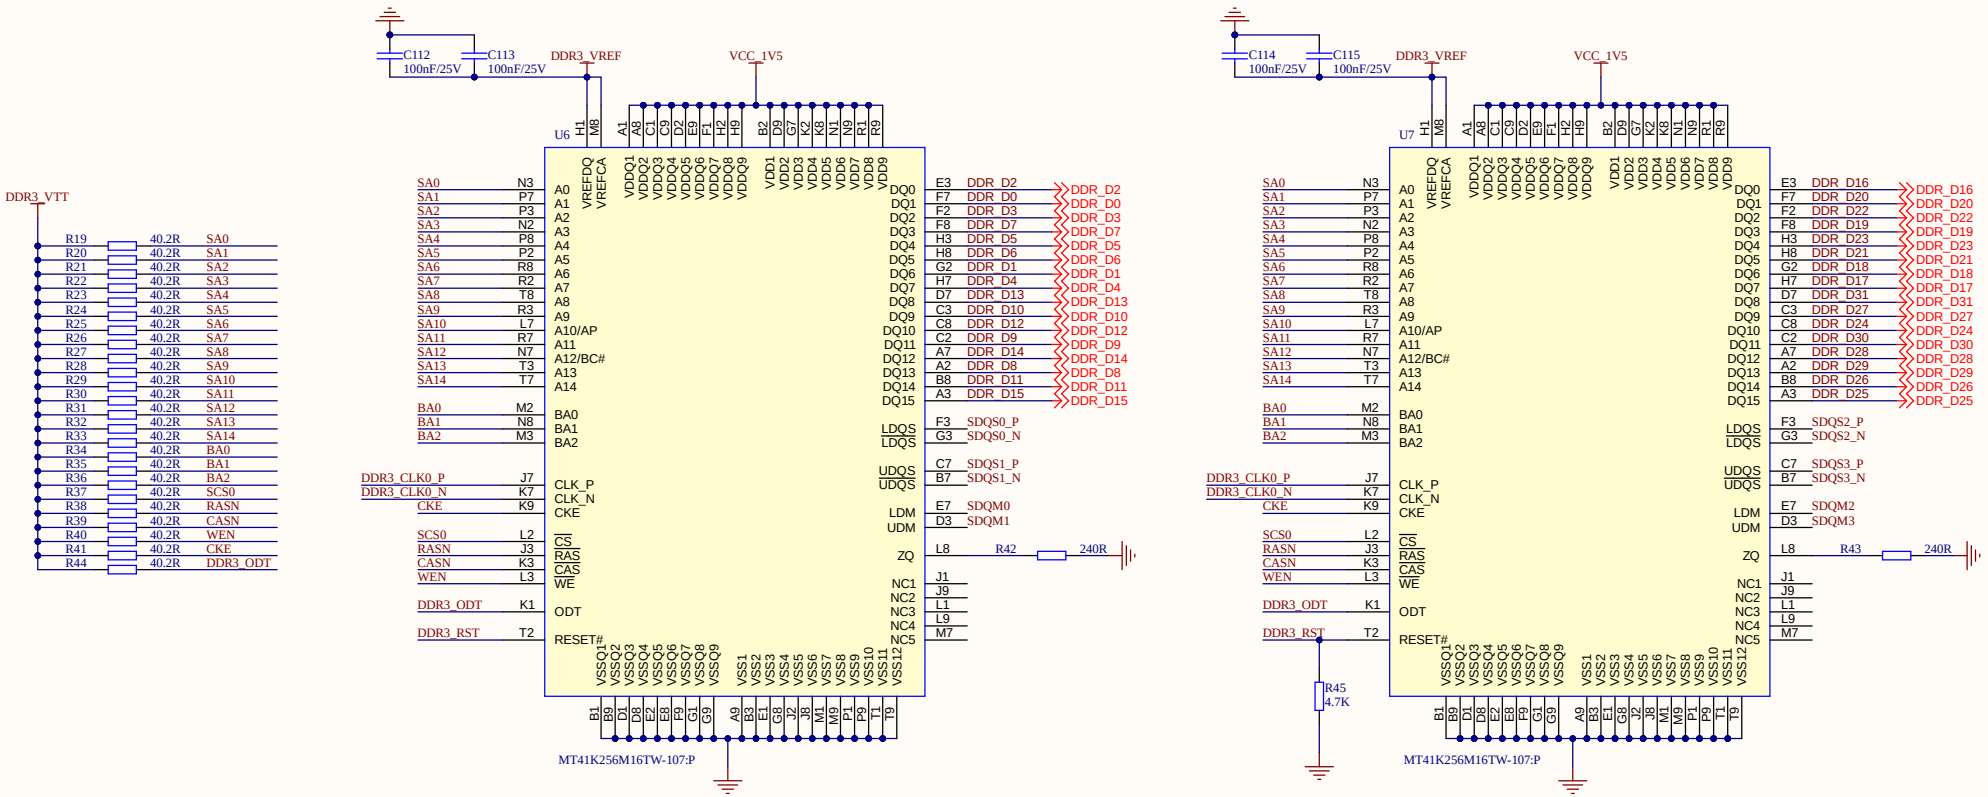

南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE07 DDR3	SIZE: A3
DATE: 2026/10/22	SHEET 7 OF 15

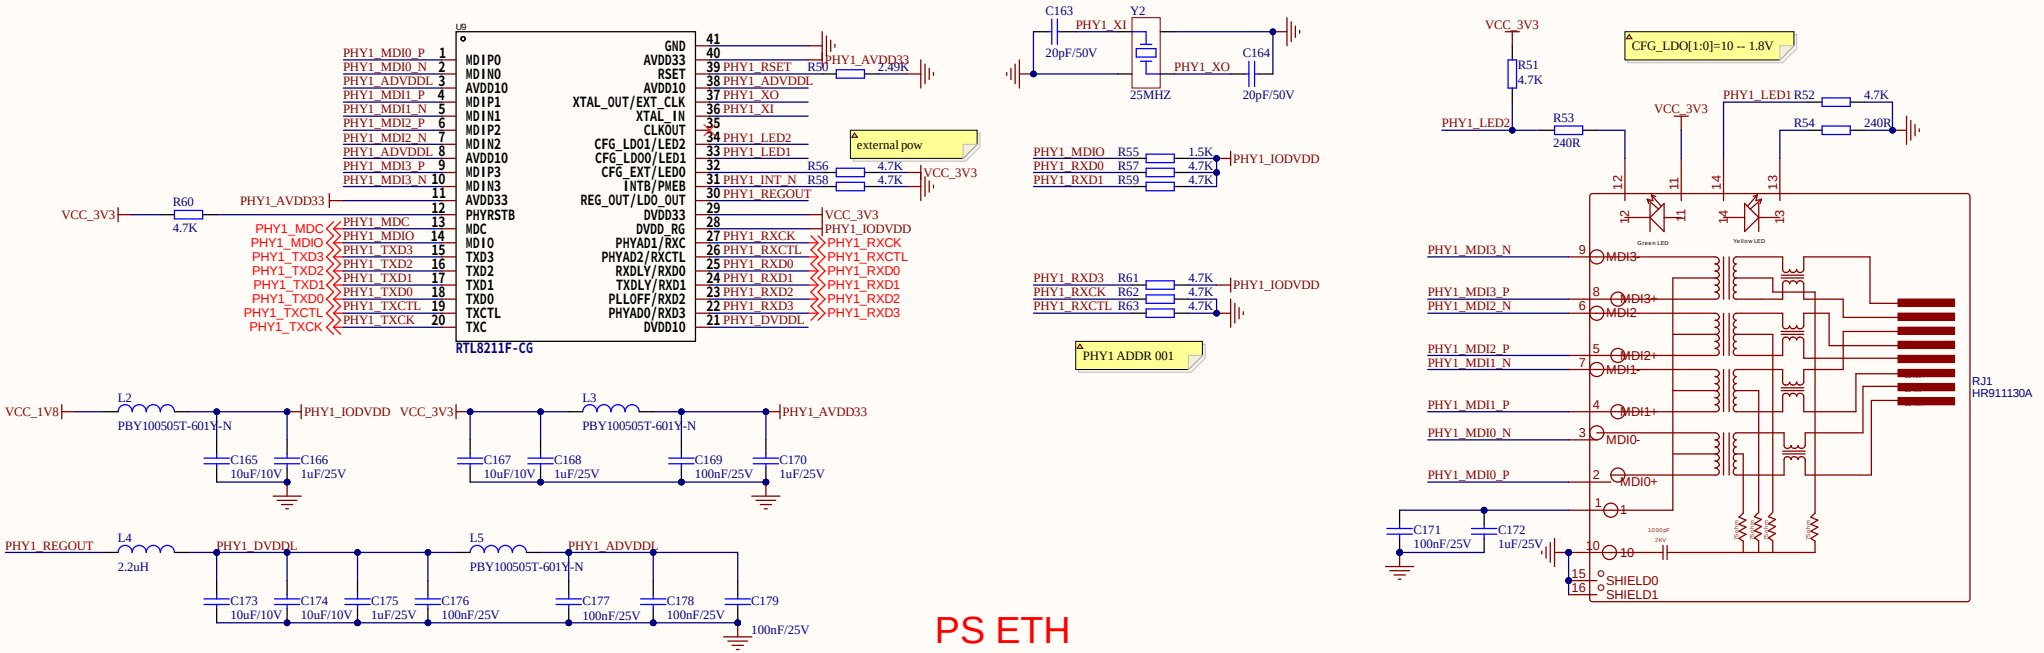


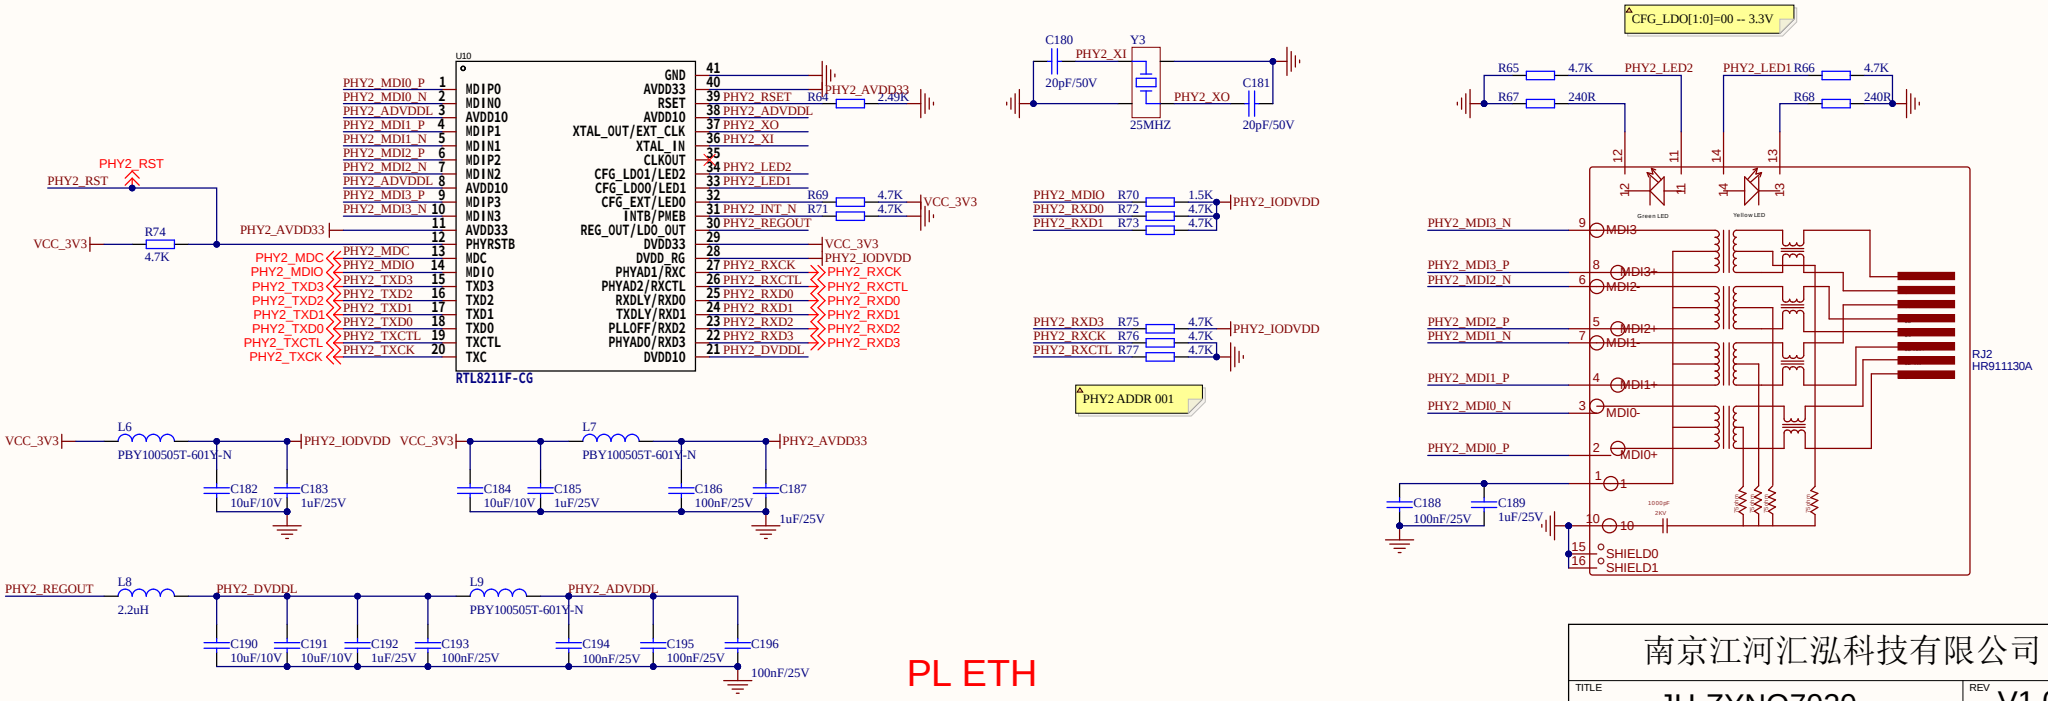

南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE08 ETH	SIZE: A3
DATE: 2026/10/22	SHEET 8 OF 15

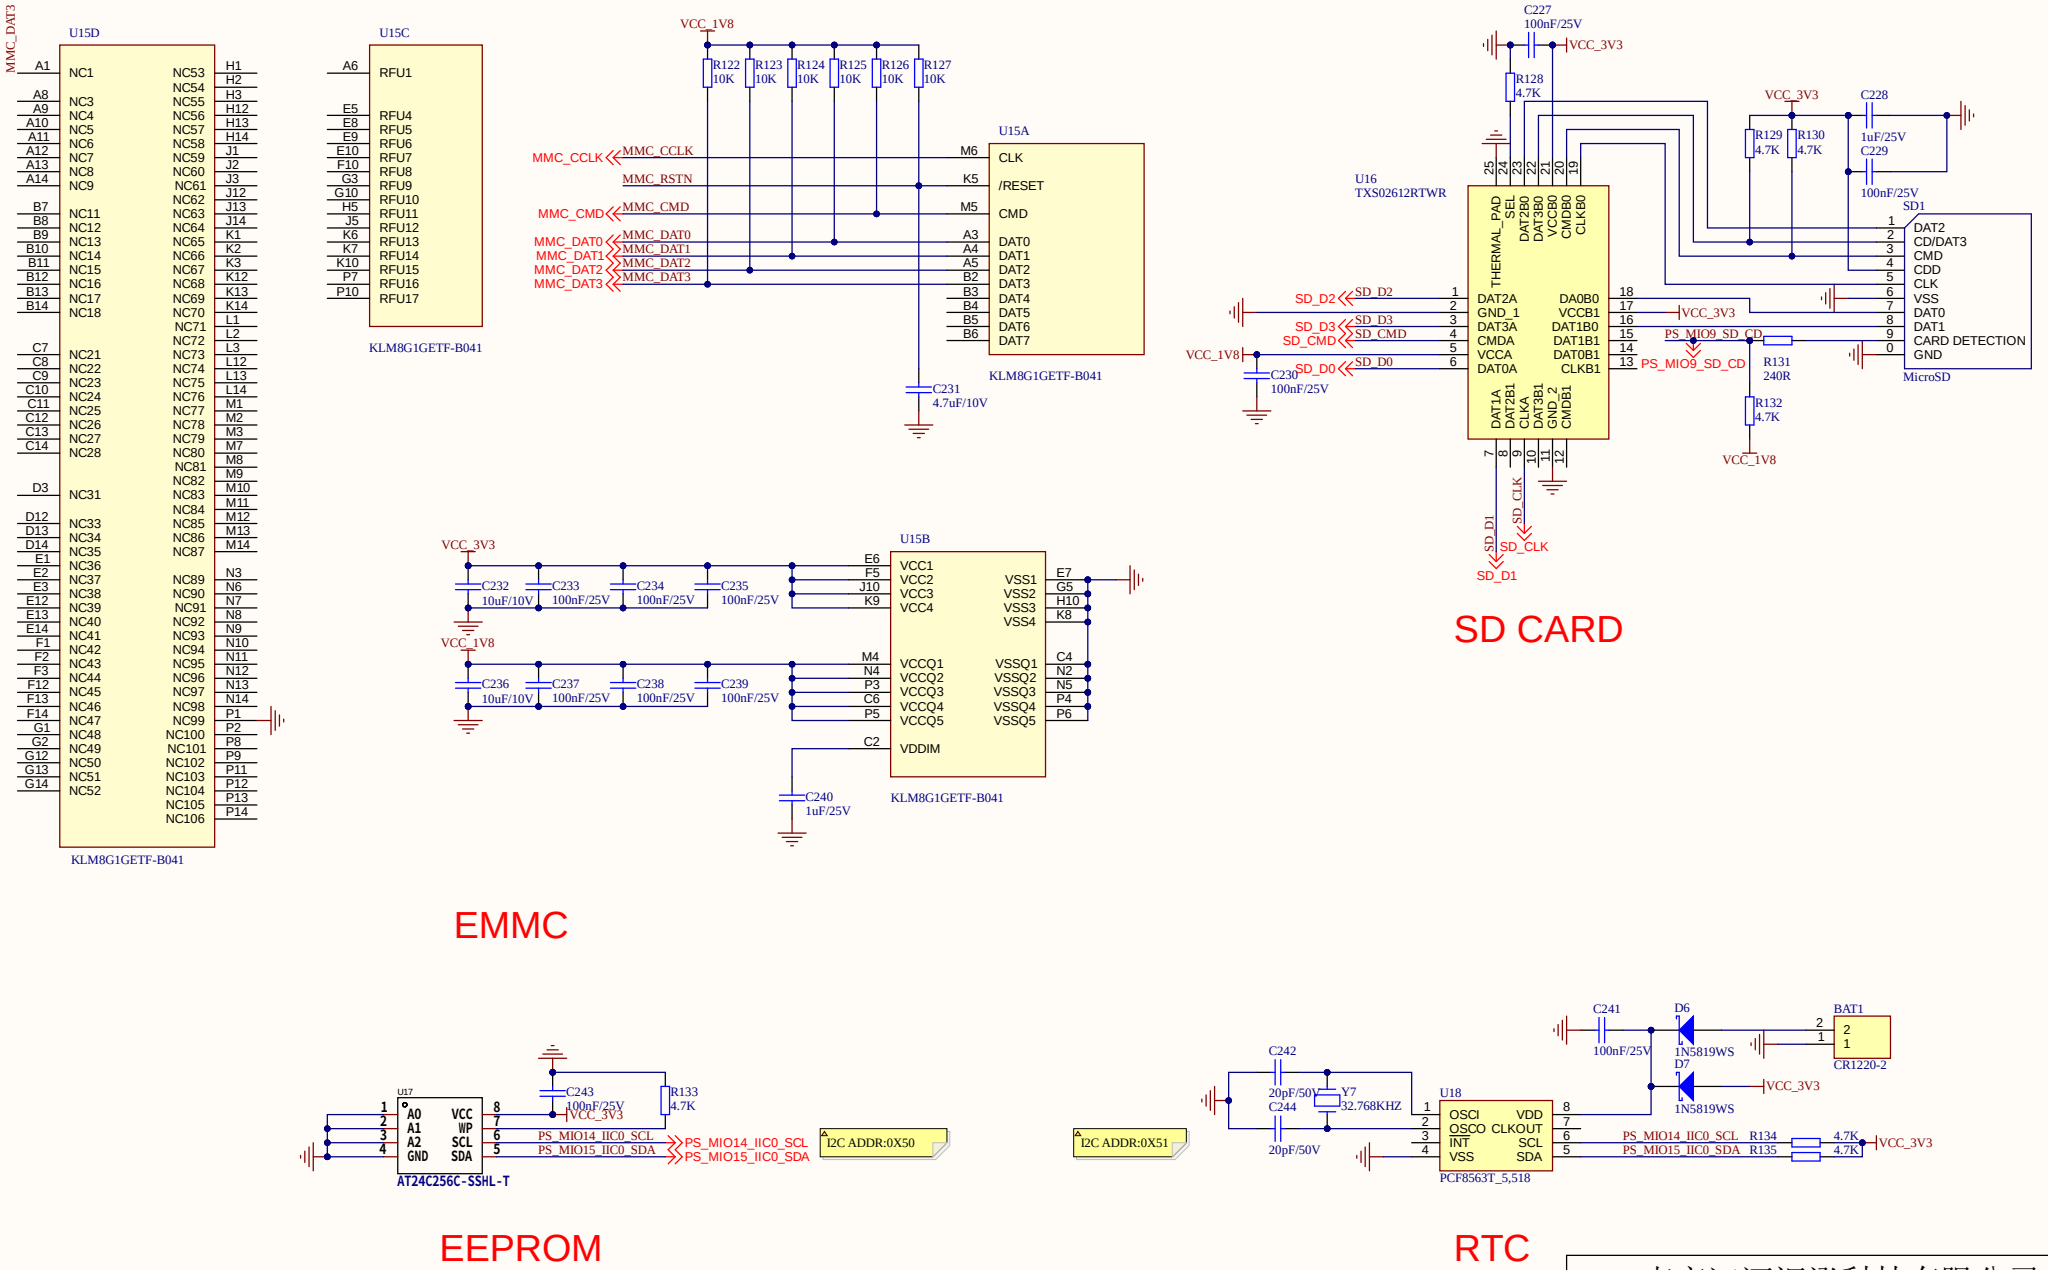
U15D
KLM8G1GETF-B041
U15C
RFU1
KLM8G1GETF-B041
VCC_1V8
R122 10K
R123 10K
R124 10K
R125 10K
R126 10K
R127 10K
MMC_CCLK
MMC_RSTN
MMC_CMD
MMC_DAT0
MMC_DAT1
MMC_DAT2
MMC_DAT3
U15A
CLK
/RESET
CMD
DAT0
DAT1
DAT2
DAT3
DAT4
DAT5
DAT6
DAT7
KLM8G1GETF-B041
C231 4.7uF/10V
C227 100nF/25V
VCC_3V3
R128 4.7K
U16
TXS02612RTWR
R129 4.7K
R130 4.7K
C228 1uF/25V
C229 100nF/25V
SD1
DAT2
CD/DAT3
CMD
CDD
CLK
VSS
DAT0
DAT1
CARD DETECTION
GND
MicroSD
SD_D2
SD_D3
SD_CMD
SD_D0
C230 100nF/25V
PS_MIO9_SD_CD
R131 240R
R132 4.7K
SD_D1
SD_CLK
SD CARD
VCC_3V3
C232 10uF/10V
C233 100nF/25V
C234 100nF/25V
C235 100nF/25V
VCC_1V8
C236 10uF/10V
C237 100nF/25V
C238 100nF/25V
C239 100nF/25V
U15B
VCC1
VCC2
VCC3
VCC4
VCCQ1
VCCQ2
VCCQ3
VCCQ4
VCCQ5
VDDIM
VSS1
VSS2
VSS3
VSS4
VSSQ1
VSSQ2
VSSQ3
VSSQ4
VSSQ5
C240 1uF/25V
KLM8G1GETF-B041
EMMC
U17
AT24C256C-SSHL-T
C243 100nF/25V
R133 4.7K
PS_MIO14_IIC0_SCL
PS_MIO15_IIC0_SDA
I2C ADDR:0X50
I2C ADDR:0X51
EEPROM
C241 100nF/25V
D6 1N5819WS
D7 1N5819WS
BAT1
CR1220-2
C242 20pF/50V
C244 20pF/50V
Y7 32.768KHZ
U18
PCF8563T_5,518
R134 4.7K
R135 4.7K
RTC
南京江河汇泓科技有限公司
JH-ZYNQ7020
V1.0
PAGE09 FLASH RTC
A3
DATE: 2026/10/22
SHEET 9 OF 15

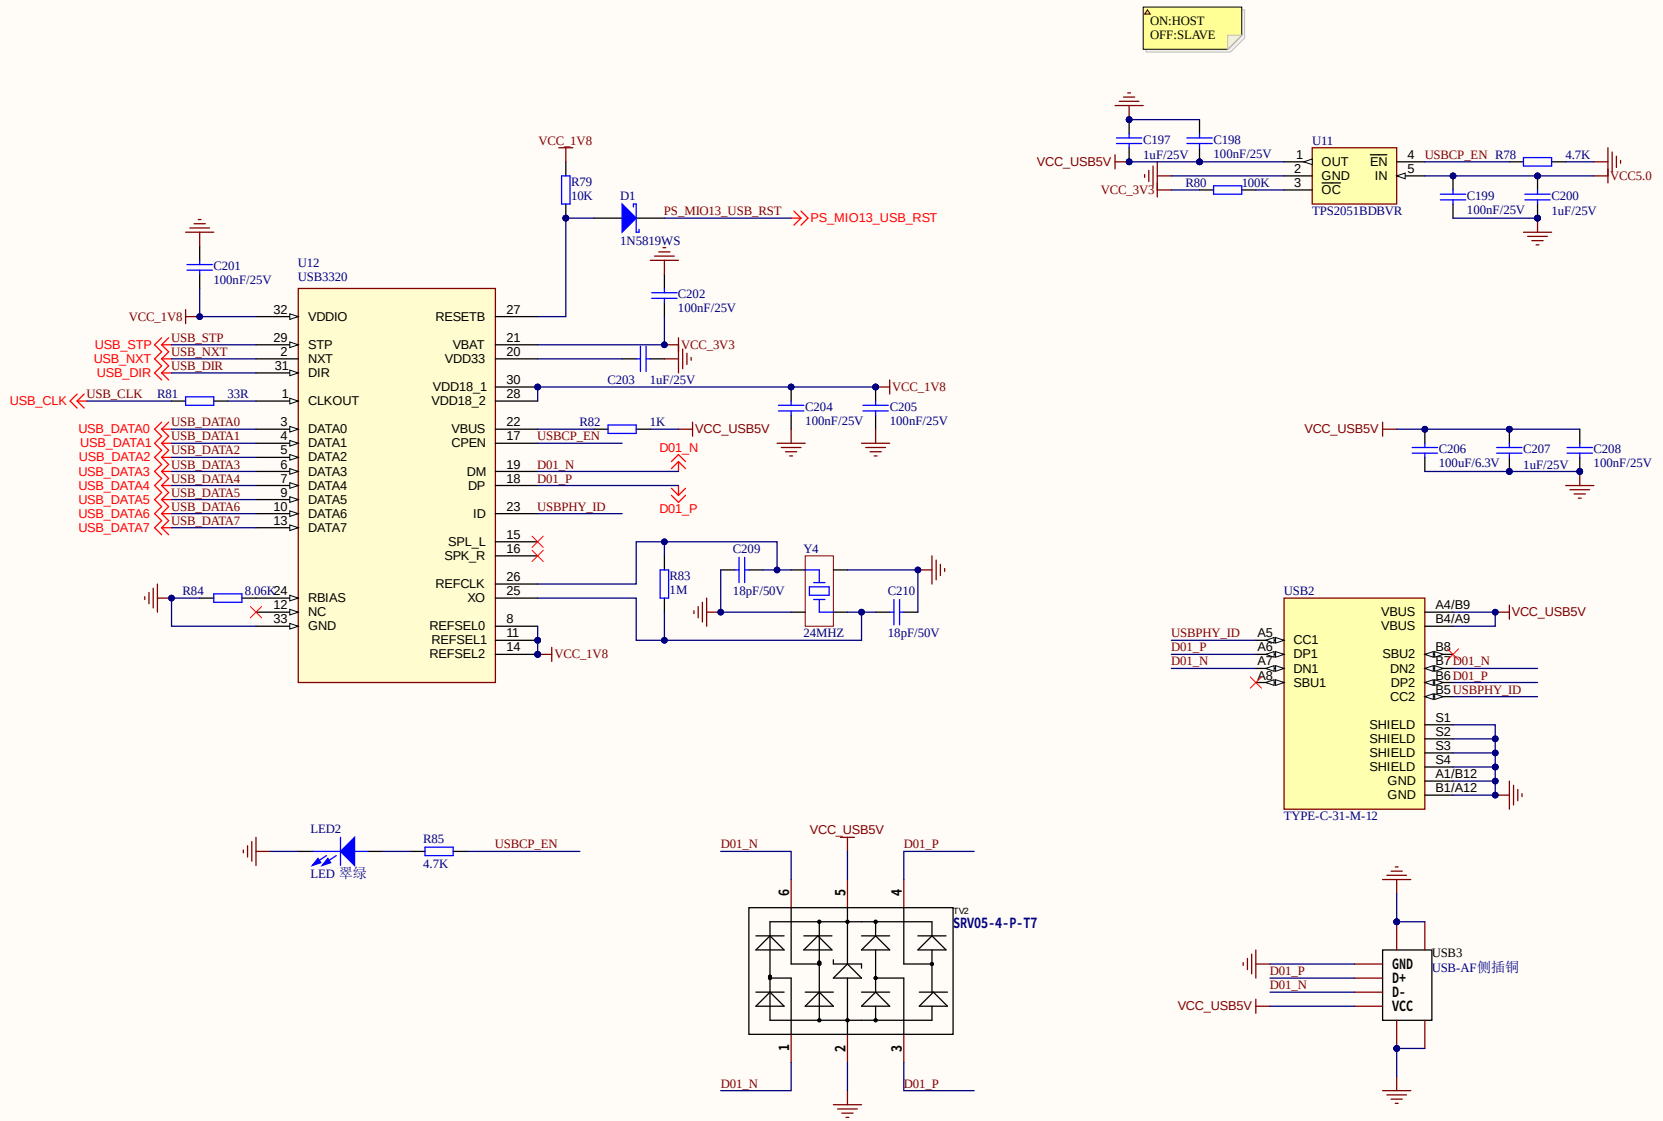


南京江河汇泓科技有限公司

TITLE	JH-ZYNQ7020	REV V1.0
PAGE10 USB		SIZE A3
DATE: 2026/10/22		SHEET 10 OF 15

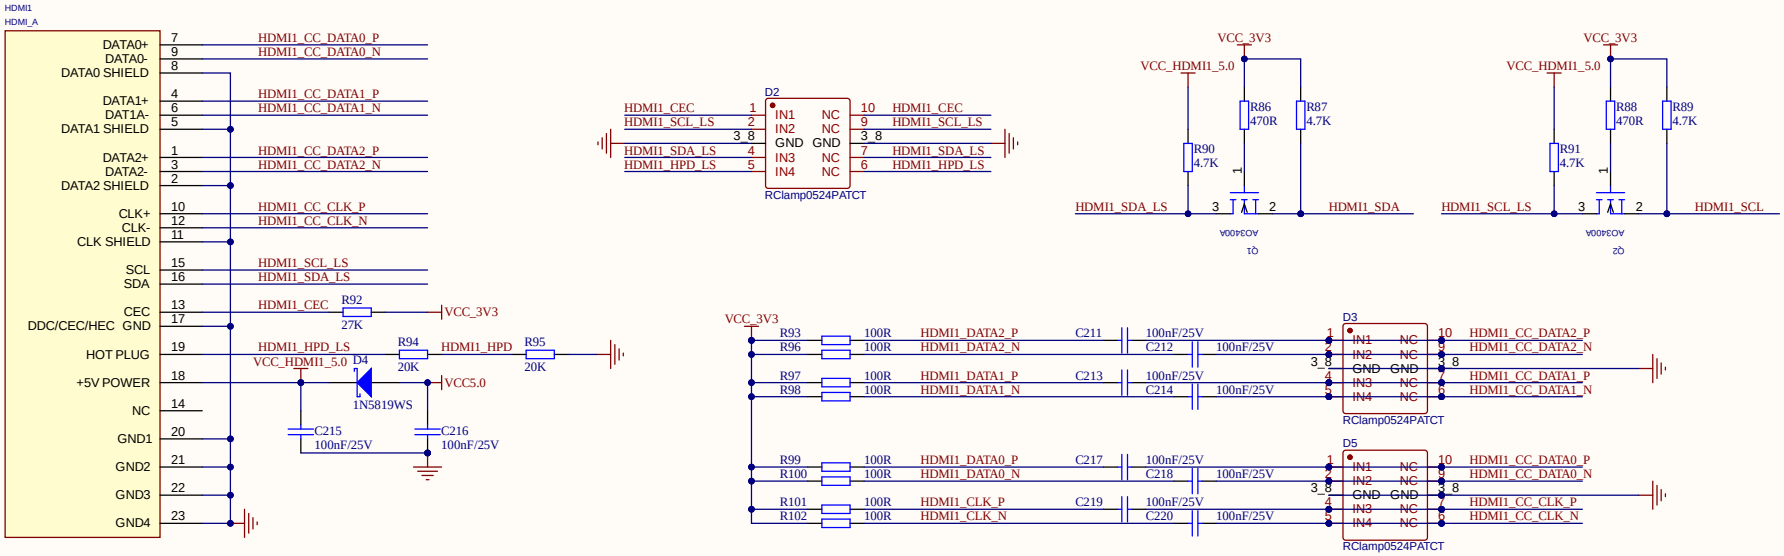


南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE11 HDMI	SIZE: A3
DATE: 2026/10/22	SHEET 11 OF 15

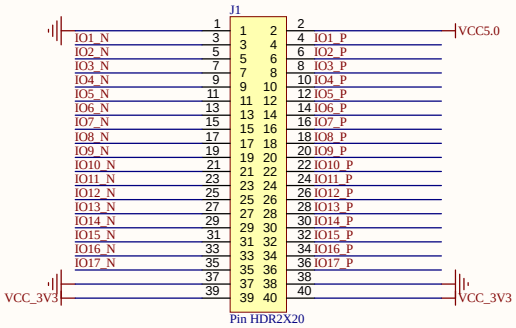

40PIN IO

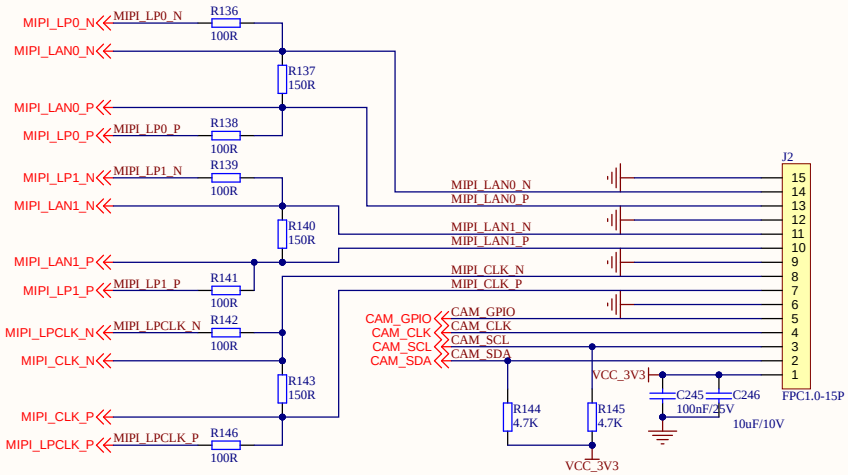


MIPI CSI

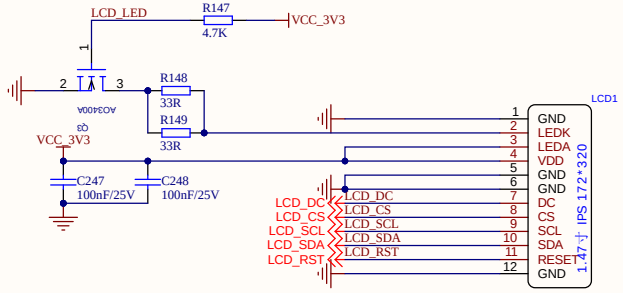


LCD

南京江河汇泓科技有限公司	
TITLE: JH-ZYNQ7020	REV: V1.0
PAGE12 40PIN MIPI	SIZE: A3
DATE: 2026/10/22	SHEET 12 OF 15

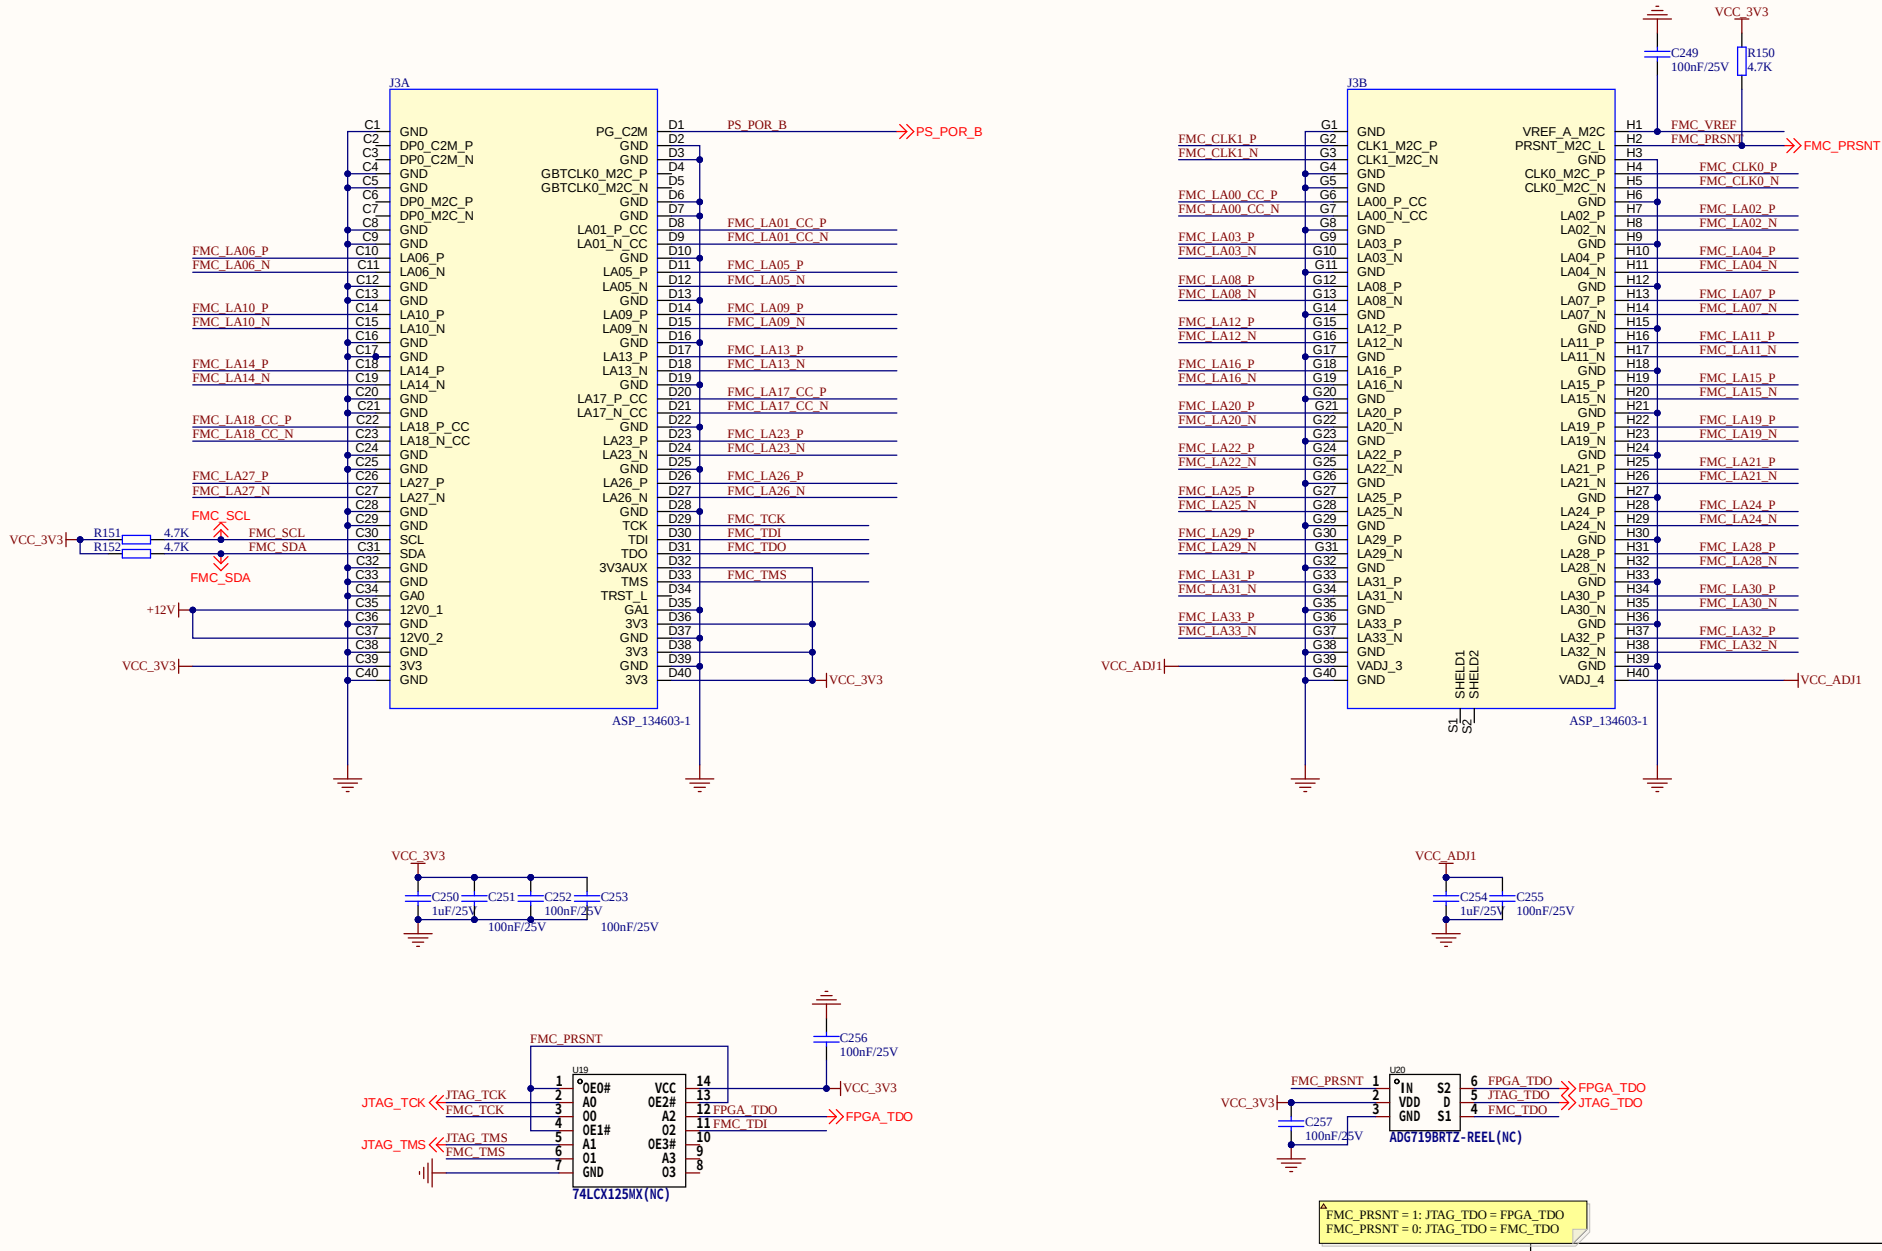


南京江河汇泓科技有限公司


TITLE: JH-ZYNQ7020	REV: V1.0
PAGE13 FMC LPC	SIZE: A3
DATE: 2026/10/22	SHEET 13 OF 15

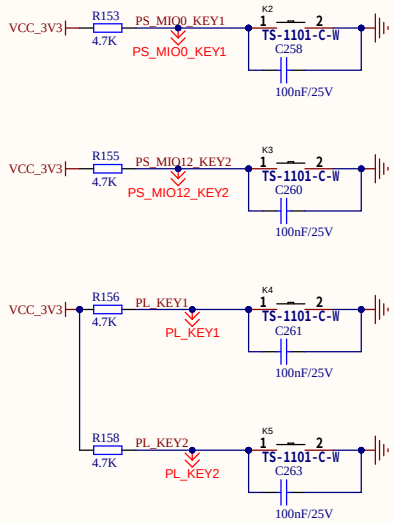


KEY

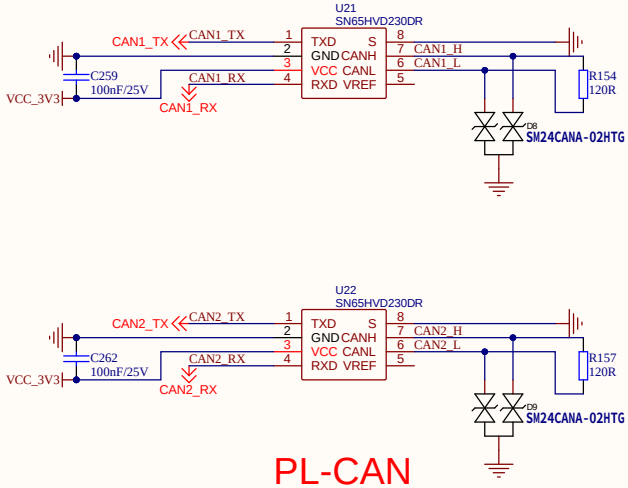


PL-CAN



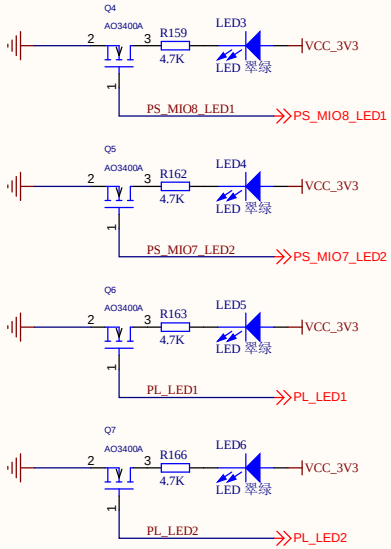


因"MIO[7]=0 -- MIO bank0 V=3.3V"，默认下拉，所以JTAG启动时，LED2不亮，为正常状态。


LED

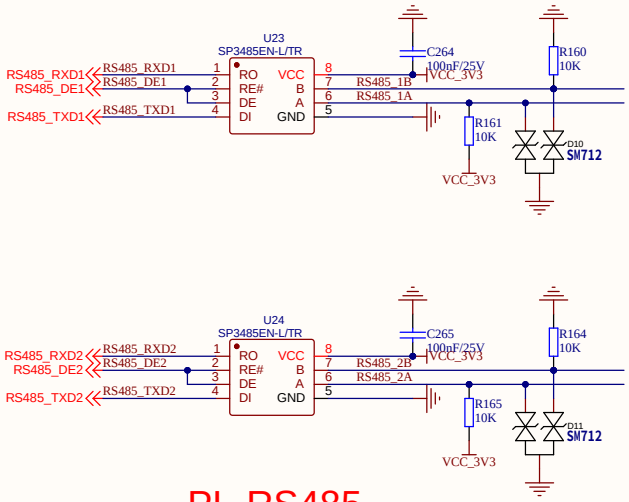

PL-RS485



南京江河汇泓科技有限公司	
TITLE: JH-ZYNQ7020	REV: V1.0
PAGE14 RS485 CAN	SIZE: A3
DATE: 2026/10/22	SHEET 14 OF 15

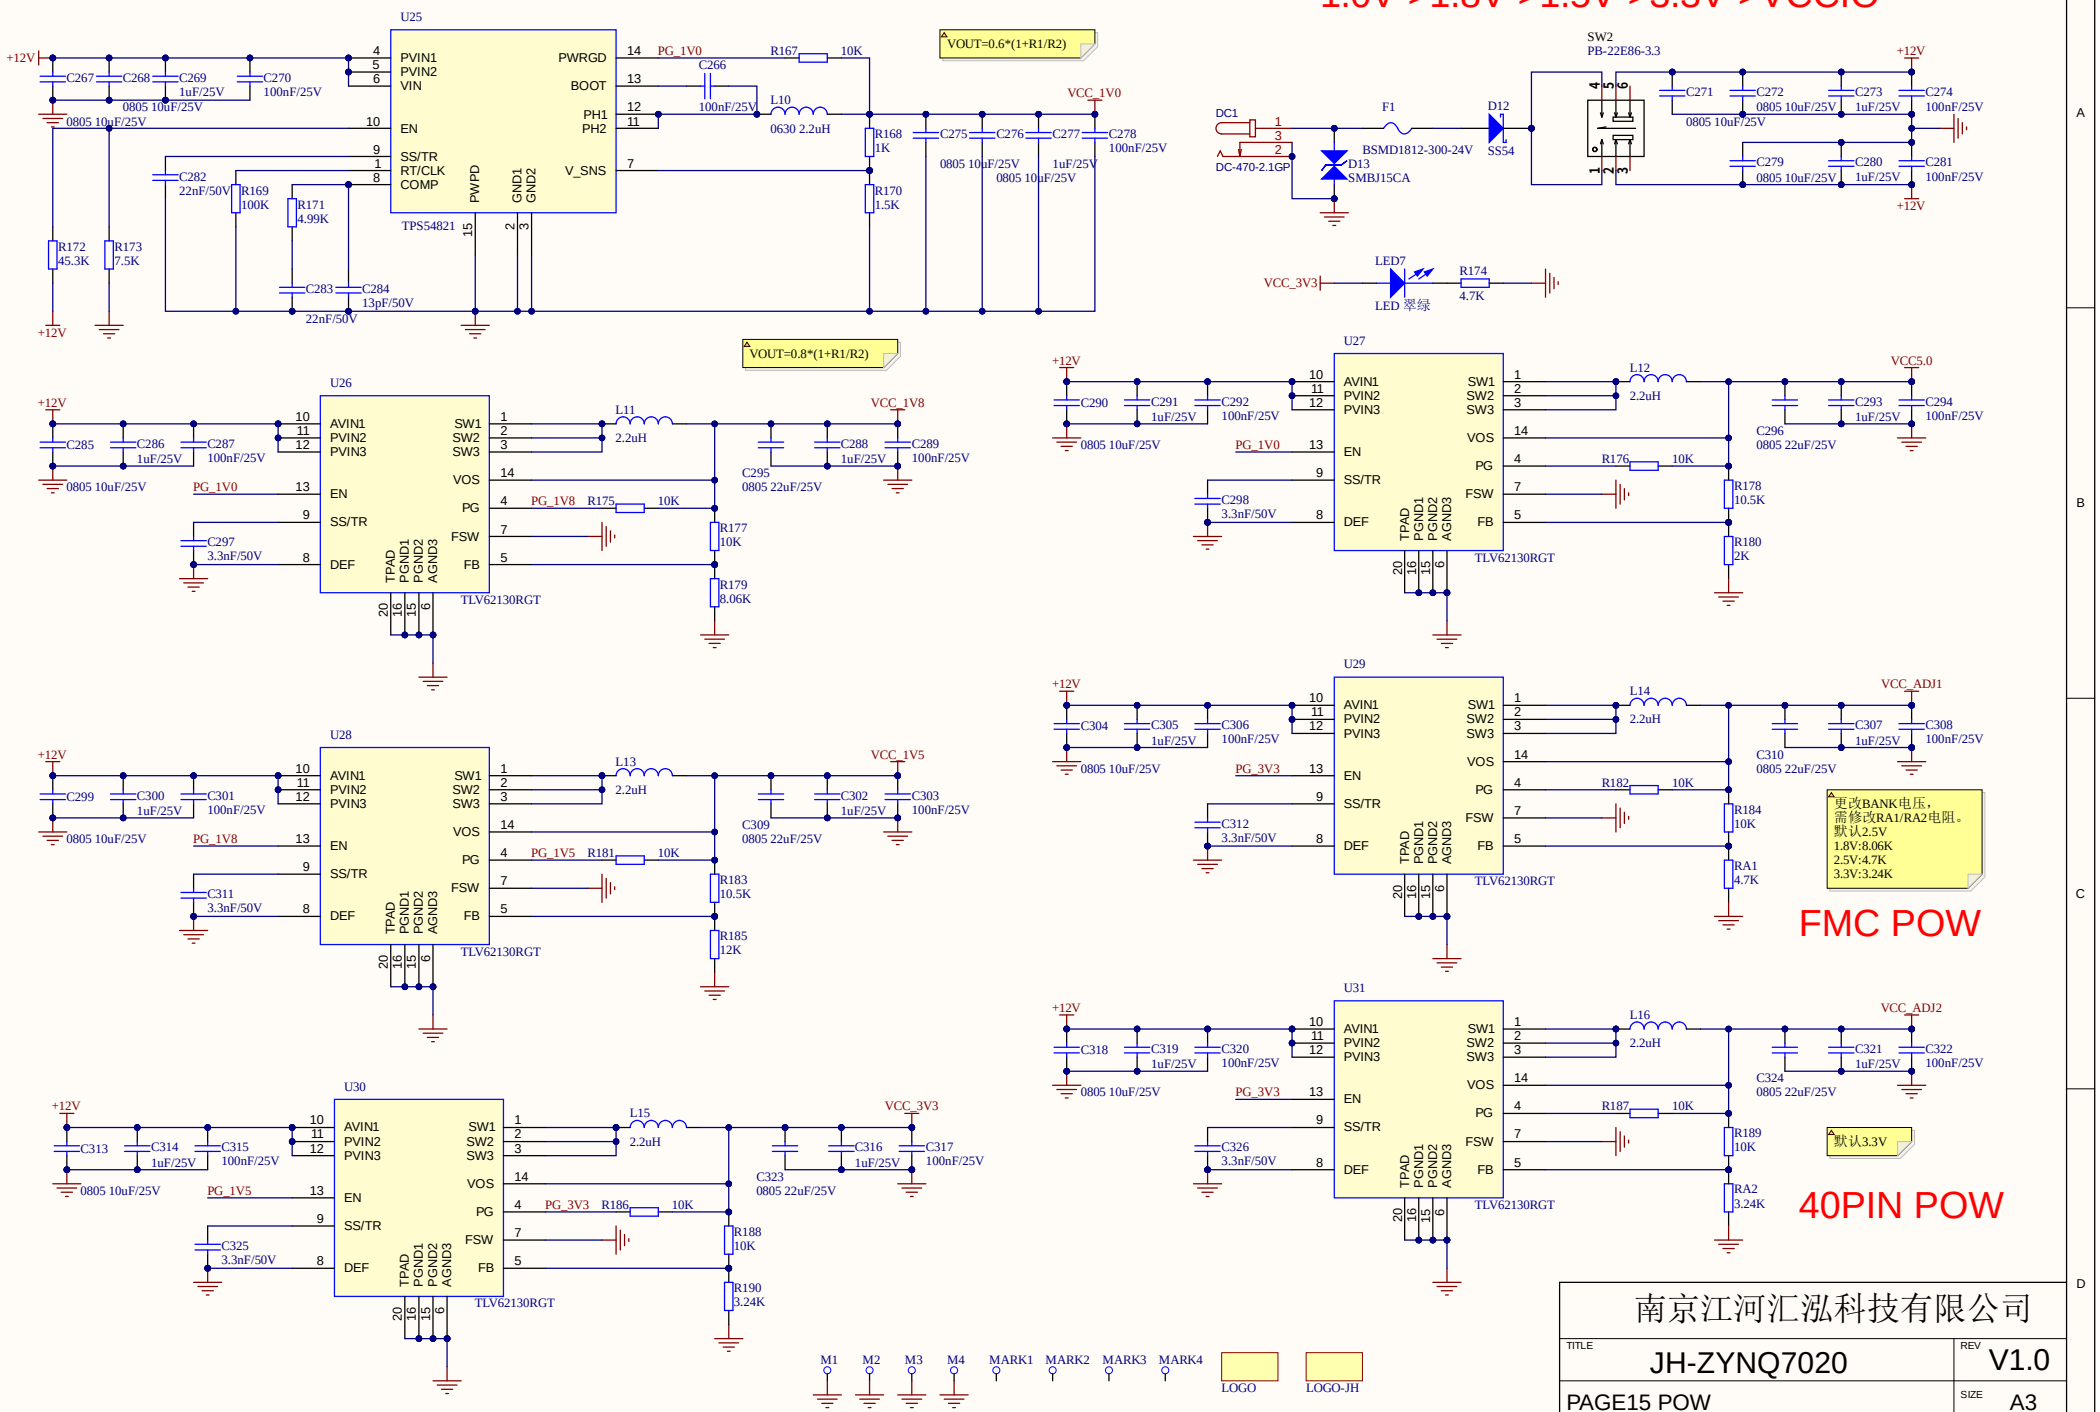
1.0V->1.8V->1.5V->3.3V->VCCIO
U25
TPS54821
VOUT=0.6*(1+R1/R2)
U26
TLV62130RGT
VOUT=0.8*(1+R1/R2)
U27
TLV62130RGT
U28
TLV62130RGT
U29
TLV62130RGT
U30
TLV62130RGT
U31
TLV62130RGT
SW2
PB-22E86-3.3
DC1
DC-470-2.1GP
F1
BSMD1812-300-24V
D12
SS54
D13
SMBJ15CA
LED7
LED 翠绿
R174
4.7K
更改BANK电压，
需修改RA1/RA2电阻。
默认2.5V
1.8V:8.06K
2.5V:4.7K
3.3V:3.24K
FMC POW
默认3.3V
40PIN POW
M1
M2
M3
M4
MARK1
MARK2
MARK3
MARK4
LOGO
LOGO-JH
南京江河汇泓科技有限公司
TITLE
JH-ZYNQ7020
REV
V1.0
PAGE15 POW
SIZE
A3
DATE: 2026/10/22
SHEET 15 OF 15