YOUR FIRST POCKETDISCO SESSION

Your room. Your people. A little disco.

A hands-on tour of private rooms, live chat and the audio tests you can try today.



A small guide for a proper test drive.

Internal Android alpha. Shared Internet playback and Play Store release are not ready yet.

01 / WHAT YOU CAN TRY

Start with the room. Know what plays.

Three experiences live here. They do not all share the same audio timeline.

01

Private rooms

Create, invite, join, see who is here, set your readiness and exchange text chat.

LIVE ROOM CONTROLS

02

Local sound check

Play the bundled 24-second generated clip. Pause, seek and replay on this phone only.

NOT SHARED PLAYBACK

03

Nearby audio lab

An internal capture and relay experiment with separate admission, Android consent and paired phones.

EXPERIMENTAL


Not in this build

No shared Internet music timeline, Spotify integration, automatic Bluetooth mesh, Windows release or public Play release.

SETUP 03 / ROOM 04 / AUDIO 05 / LAB 06-07 / TEST LAP 09

02 / BEFORE YOU TAP

Get connected. Then get together.

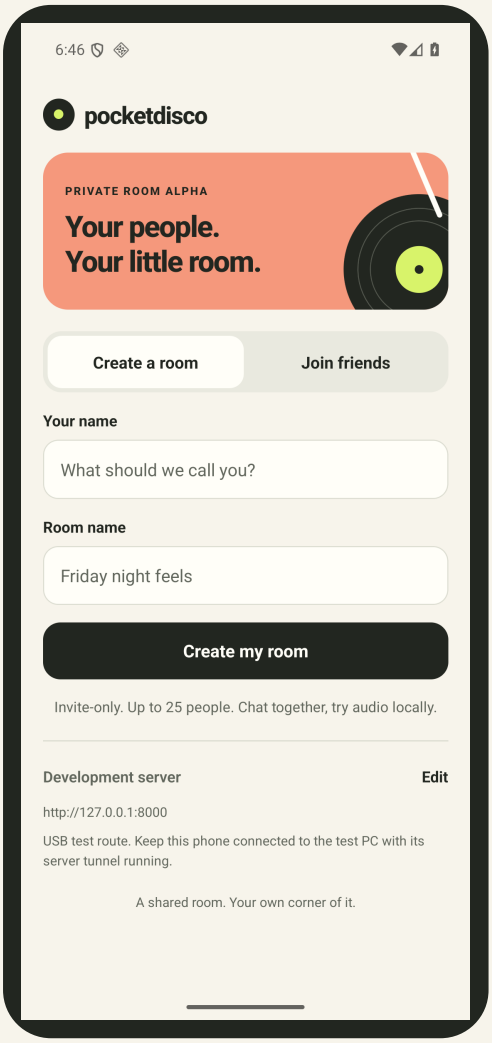

REAL APP SCREEN / INTERNAL BUILD

1 Install the internal APK

Use the handed-off build for this device. If Android reports a signing conflict, stop and ask for the matching APK. Do not uninstall your existing app.

2 Keep the private route alive

Leave USB connected and debugging authorized. The PC needs the running SSH tunnel and this phone's ADB port mapping. USB tethering alone is not enough.

3 Open PocketDisco

The internal server address is **http://127.0.0.1:8000**. It is saved under **Development server**. Saving the address does not test the connection.

ROOM + CHAT CONNECTION

PHONE —USB / ADB→ THIS PC —SSH TUNNEL→ PRIVATE BACKEND

Outside this setup? Public HTTPS is still pending. Ports 50080 / 50443 are the available router ports; a working domain and trusted HTTPS are not configured yet. Unplugged phones cannot use this loopback route.

03 / BRING YOUR PEOPLE

A room in five minutes.

Use two configured clients for the full loop. The second can be another phone or the test emulator.

1 Make your room

Choose **Create a room**, enter your name and a room name, then tap **Create my room**.

2 Bring someone in


Use **Share room invite**. On the second client, choose **Join friends**, enter a name and the 12-character code, then join.

3 Check the room

Use the **Room** shortcut. Both names should appear under **Your people**. Tap **I'm ready** on each client and watch the status update.

4 Say hello both ways

Use **Chat** and send a short message from each client. It should appear once on both. The draft clears only after the server accepts the send.

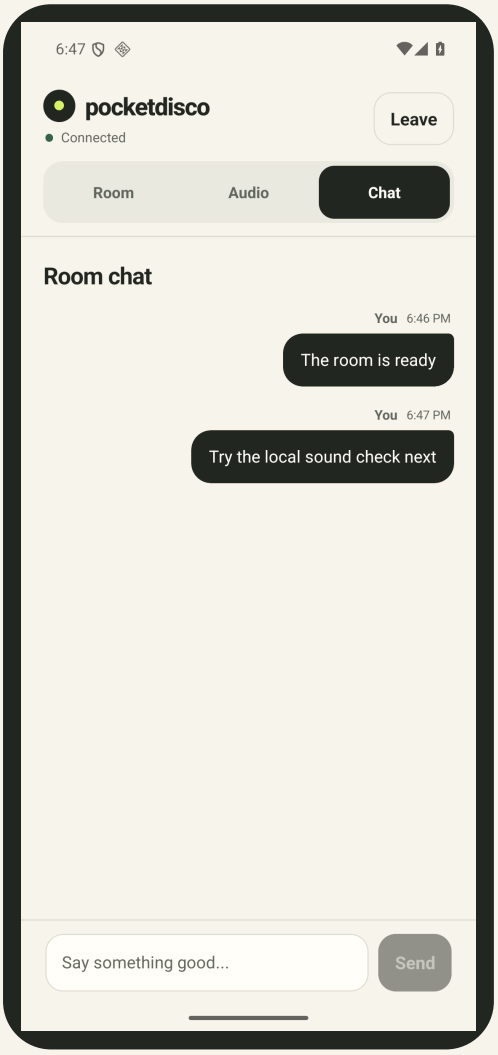


REAL APP SCREEN / INTERNAL BUILD

Ready means ready, not play

The ready toggle tells people you are settled in. It never starts the demo or starts shared music. Keep the invite within your test group.

04 / PRESS PLAY

A little sound check. This phone only.

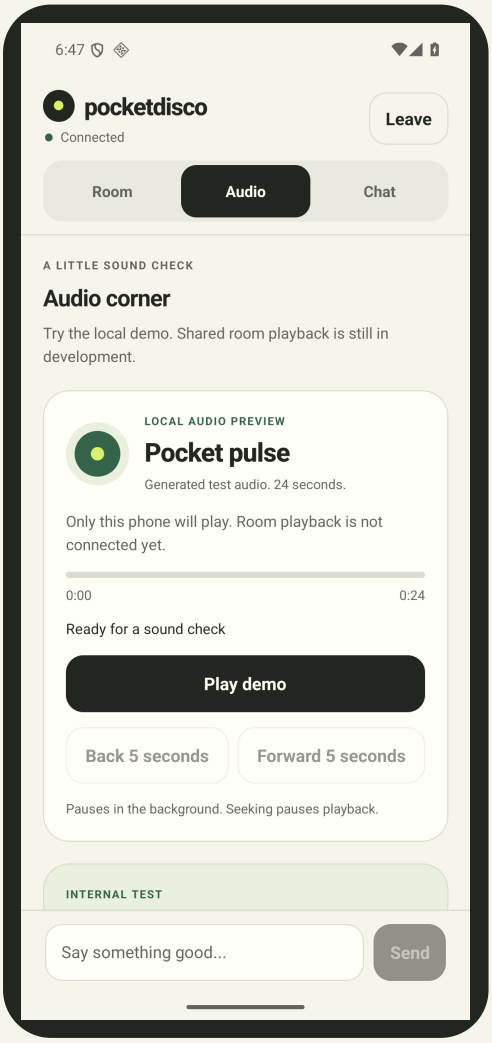

REAL APP SCREEN / INTERNAL BUILD

24 SECONDS / GENERATED AUDIO

1 Start quietly

Turn media volume down. Tap the **Audio** shortcut, then **Play demo** in Audio corner. Its playhead should move and this phone should play.

2 Pause, seek, replay

Tap **Pause demo**. Try **Back 5 seconds** and **Forward 5 seconds**. Seeking pauses. Tap **Play demo** to resume, or **Replay demo** after the clip ends.

3 Put it in the background

Go Home, then return. It should remain paused, not resume by itself. Leaving the room also releases the player.


The useful comparison

Playing on phone A should not start phone B. A moving playhead proves local playback activity, not cross-phone synchronization or measured speaker timing.

05 / OPTIONAL EXPERIMENT

Nearby is a separate audio session.

The nearby code controls admission. Your Internet room code does not.

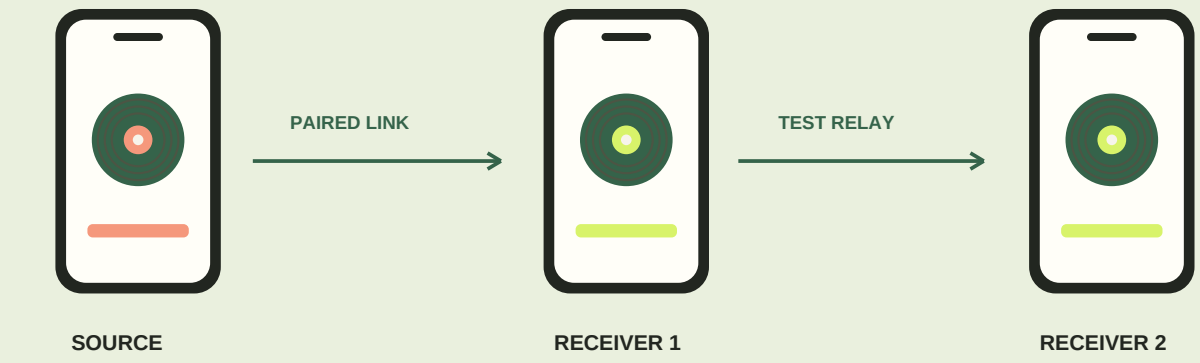

Original speaker is not delayed

Illustration, not a measured result

This is a low-fidelity diagnostic. It transmits 16 kHz mono PCM with manual pairing, up to three direct links and three hops. It does not automatically link every phone. Android consent and the source app's capture policy still apply. The walkthrough on the next page uses generated audio only.

Keep this outside the acceptance lap

The latest recorded Bluetooth regression lost clock quality. Earlier short successes do not make it reliable. Software timestamps are not an acoustic sync measurement. The emulator substitutes USB/TCP, not a real Bluetooth radio.

Exit safely: Back returns to the room and ends nearby audio; room chat reconnects. Stop the original music app separately. This lab does not turn a phone into an ordinary Bluetooth speaker or grant rights to YouTube Music / Spotify catalog audio. A patched APK does not change that.

06 / OPTIONAL PAIRED-PHONE LAB

Try one nearby link.

Use two physical Android 10+ phones within Bluetooth range. Start quietly and keep the receiving screen open.

A sends. B receives.

Install matching current Capture Lab builds on both and Test Source on A. Pair A and B in Android settings. Open Capture Lab, or use Open nearby audio from a connected internal room.

1 **Share one fresh code**

Stop any old sessions. On A, tap **New session code**. Put the same 32 hexadecimal characters in B's **Session code** field. This is not the room's 12-character invite.

2 **Make the paired link**

A taps **Host paired Bluetooth**. B taps **Receive paired Bluetooth**, then selects A's paired name. Allow Bluetooth access if requested. Wait for one peer on each.

3 **Choose the generated source**

On A only, select **Generated source** and tap **Start capture**. Read and approve Android's capture prompt if you intend to transmit. Do not start capture on B.

4 **Play the test tone**

On A, tap **Open generated source**, then **Play allowed**. On B, use **Refresh metrics** and look for Clock ready, Output: playing and increasing received frames.

5 **Check the limits, too**

The source speaker plays first; receivers use a 1.5-second buffer. After startup settles, a clock that stays waiting, repeated realignments or silence is not a pass. A and B are not synchronized speakers.

6 **Stop both sides**

Tap **Stop** in Test Source. Return to the lab and tap **Stop session** on both phones. Back exits the lab; returning to the room ends nearby audio and reconnects chat.

Using the emulator? Ask the tester to configure the USB/TCP route and use the USB/TCP test buttons instead. That is not a Bluetooth test. Full setup: **experiments/android-capture-relay/README.md**.

07 / THE USEFUL ROUGH EDGES

Break the connection. Keep your place.

Try these with a disposable test room. Keep personal messages and real invite codes out of screenshots.

CONNECTED → OFFLINE → RECOVERED

01 / Background

Go Home on one client. Send a message from the other, then return.

Look for: The room reconnects and shows the latest snapshot. Local demo audio stays paused.

02 / Lost route

With a tester coordinating the PC, briefly remove only this test phone's API route, then restore it.

Look for: Offline controls stay unavailable. Use Try again or Return to your room after recovery.

03 / Restart

Close PocketDisco, then reopen it. For a real process-death test, ask the tester to stop only this app.

Look for: The saved guest and room recover. Audio must not start without another tap.

04 / Leave

Tap **Leave**, then **Leave room** in the confirmation. Repeat on the other client.

Look for: Welcome appears without an error. If leaving fails, use Room / View error to see why. The last member leaving closes the room.

Do not reset to recover. Uninstalling or clearing storage removes the saved guest session. A connection error is not a reason to erase app data.

08 / MAKE IT YOURS

Your ten-minute acceptance lap.

Tick a box only after seeing the result. Use a PDF reader or print this page. Leave blocked steps blank.

CHECK	TRY THIS	A PASS LOOKS LIKE
☐	**Open the app**	Welcome appears without a crash.
☐	**Create and join**	Two names appear in the same room.
☐	**Toggle readiness**	The other client sees the new status.
☐	**Chat both ways**	Each message arrives once on both.
☐	**Return from Home**	New messages and presence recover.
☐	**Lose and restore route**	Retry recovers; controls follow connection.
☐	**Play the local demo**	Only the phone you tapped plays.
☐	**Pause, seek, background**	Seek and return never auto-resume.
☐	**Leave on both clients**	Both reach Welcome without an error.

ONE THING I LOVED

ONE THING TO FIX

09 / THE TEST REPORT

What we tested. What comes next.

Nothing A142 and an API 36 emulator used the private USB route. POCO received the APK, but its USB security gate blocked installation. It was not tested.

TESTED BUILD: c9ebd01

Room and chat

All 10 checks passed in one two-client run: join, readiness, chat, background recovery, restart, offline retry and clean exit.

Local audio preview

12 checks passed on Nothing and 12 on the emulator: play, pause, seek, replay, background, restart and stop on exit.

Generated-source USB experiment

All 4 checks passed: authenticated receiver, matching PCM, scheduled output and clean stop. Not a Bluetooth or acoustic sync test.

STILL NEEDED BEFORE A PUBLIC RELEASE

Trusted public HTTPS and a deployable endpoint. A connected shared-room audio timeline. Reliable Bluetooth timing and two-phone acoustic measurements. Cleared media rights. Privacy, deletion, moderation, signing and Android compatibility checks.

Tell us what actually happened

Include the screen, action, expected result and observed result. Add the build above, device model and whether USB was connected. Do not include invite codes, nearby codes, tokens, passwords or private chat.

Detailed evidence and reproduction notes: docs/walkthrough/README.md