Unit Fan

SKU:U063













Description

Unit Fan is a power drive unit based on an N20 DC motor. It is controlled via GPIO level or PWM signals, delivering a no-load output shaft speed of up to 8800 RPM and supporting precise start/stop control as well as stepless speed regulation. The unit communicates through a Grove HY2.0-4P interface, integrates efficient driving and protection circuits, and adopts a LEGO-compatible hole design for flexible integration with LEGO structures or screw mounting. It is suitable for robot drive systems, model power applications, active cooling, and various motion control scenarios.

Features

- Motor Type: N20 DC Motor
- No-Load Speed: 8800 RPM
- Rotation Direction: Single Direction
- Control Method: GPIO / PWM Speed Control
- Communication Interface: Grove HY2.0-4P
- 2 x LEGO-Compatible Holes
- Development Platform
  - UiFlow1
  - UiFlow2
  - Arduino IDE

Includes

- 1 x Unit Fan
- 1 x HY2.0-4P Grove cable (20cm)
- 2 x Propellers


Applications

- Motion control

Specifications

Specification	Parameter
Product Size	32.0 x 24.0 x 12.2mm
Product Weight	9.3g
Package Size	138.0 x 93.0 x 13.2mm
Gross Weight	15.2g

Schematics

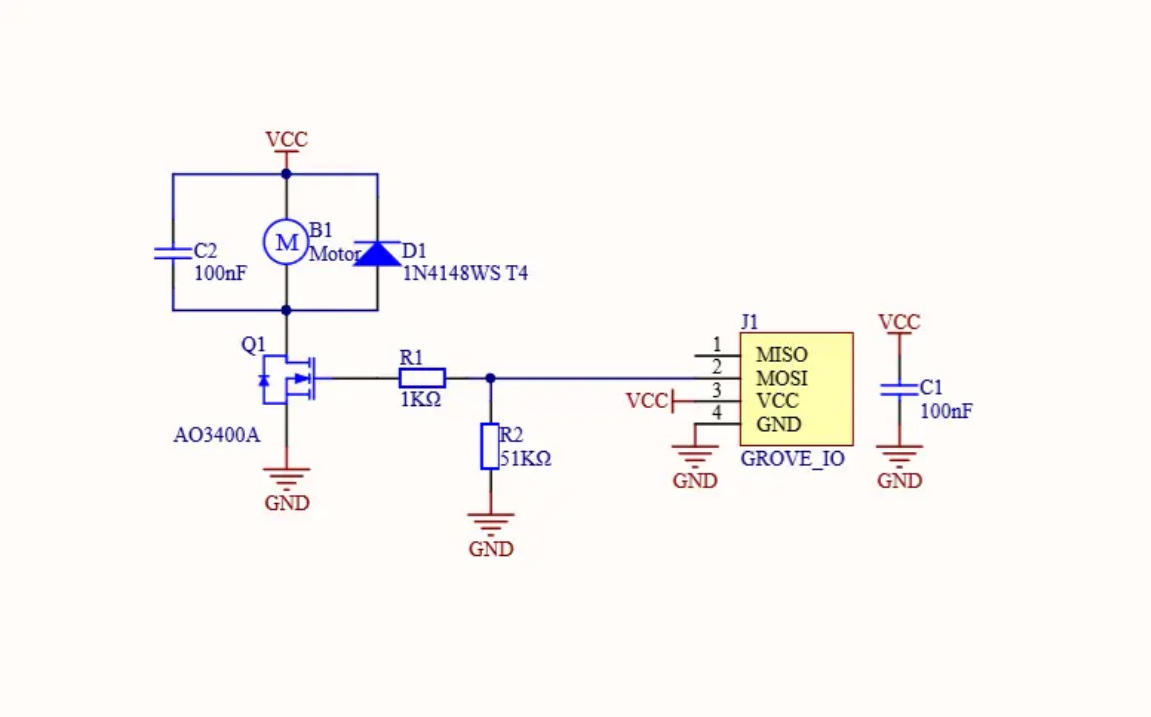


PinMap

Unit Fan

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	DIN	NC

Model Size

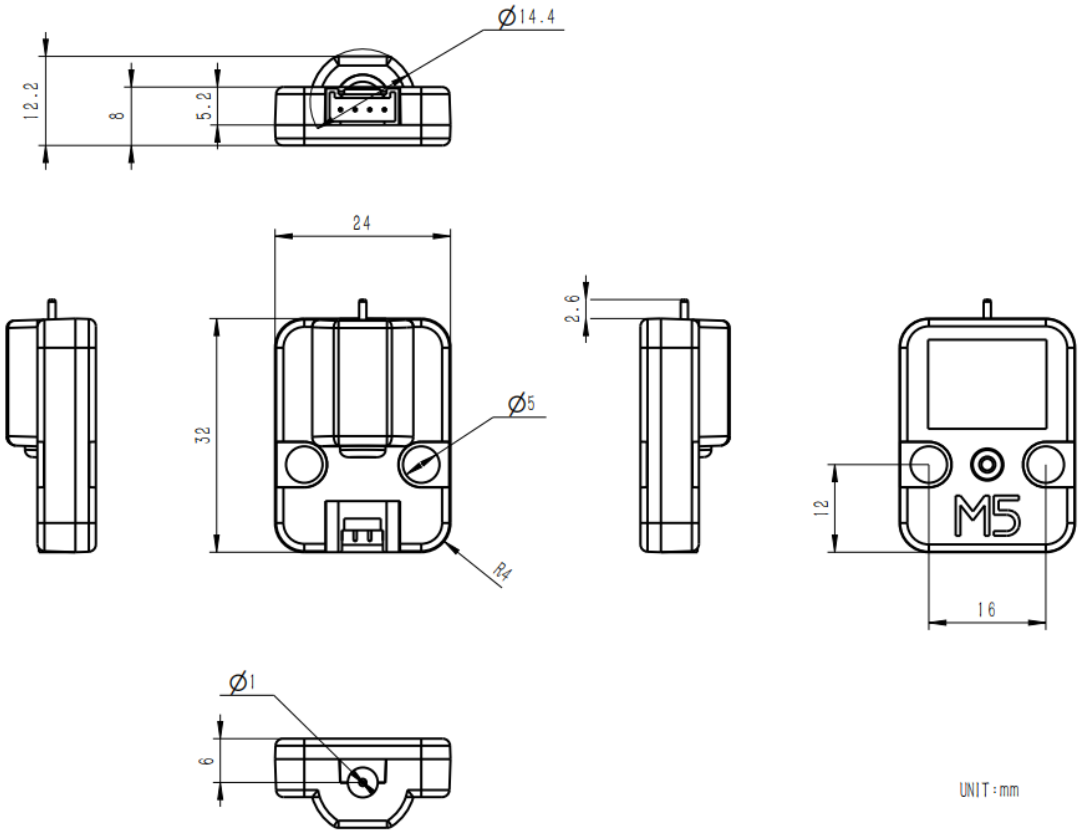

Structure

- Unit Fan Structure Files

Softwares

Arduino

- Unit Fan Test Example

UiFlow1

- Unit Fan UiFlow1 Docs

EasyLoader

Easyloader	Download Link	Remarks
Unit Fan Test Easyloader	download	/