

Module ExtPort For Core2

SKU:M123





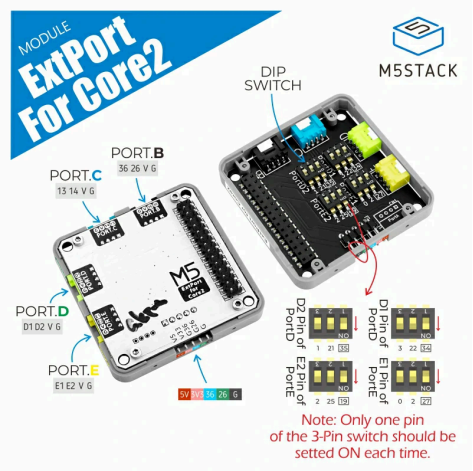

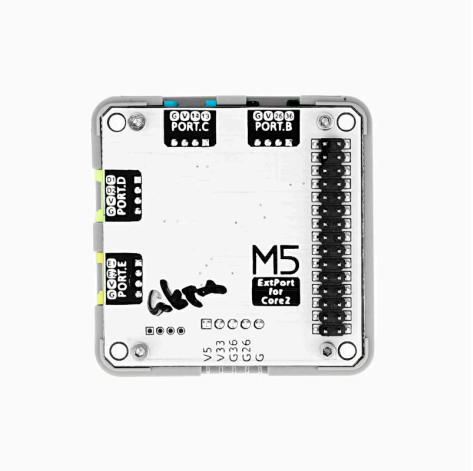










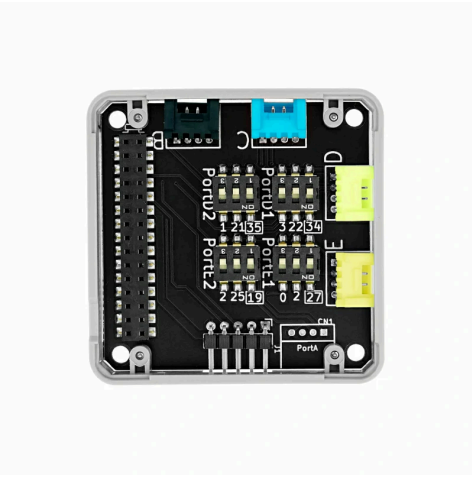



Description

Module ExtPort For Core2 is a Grove interface expansion module designed specifically for the M5Stack Core2. The module routes the Core2's M5-Bus IO externally and provides 4 Grove expansion interfaces (PORT.B/C/D/E). Among them, PORT.D/E can flexibly configure GPIO connections via onboard DIP switches, effectively enhancing the peripheral expansion flexibility of the Core2.

Features

- 4 x Grove Interfaces (PortB/C/D/E)
- 4 x 3-Position DIP Switch (PortD/E)
- 1 x 5Pin@2.54mm Male Header

Includes

- 1 x Module ExtPort For Core2

Applications

- Multi-sensor, Multi-actuator Expansion
- DIY Projects


Specifications

Specification	Parameter
Expansion Interface	PortB, PortC, PortD, PortE
Product Size	54.0 x 54.0 x 13.0mm
Product Weight	24.0g
Package Size	132.0 x 95.0 x 16.0mm
Gross Weight	58.0g

Learn

Module Usage Notice

Before using the Module ExtPort For Core2, please ensure that only one channel of each DIP switch group is set to **ON**, so as to avoid device damage caused by multiple positions being conducted at the same time.

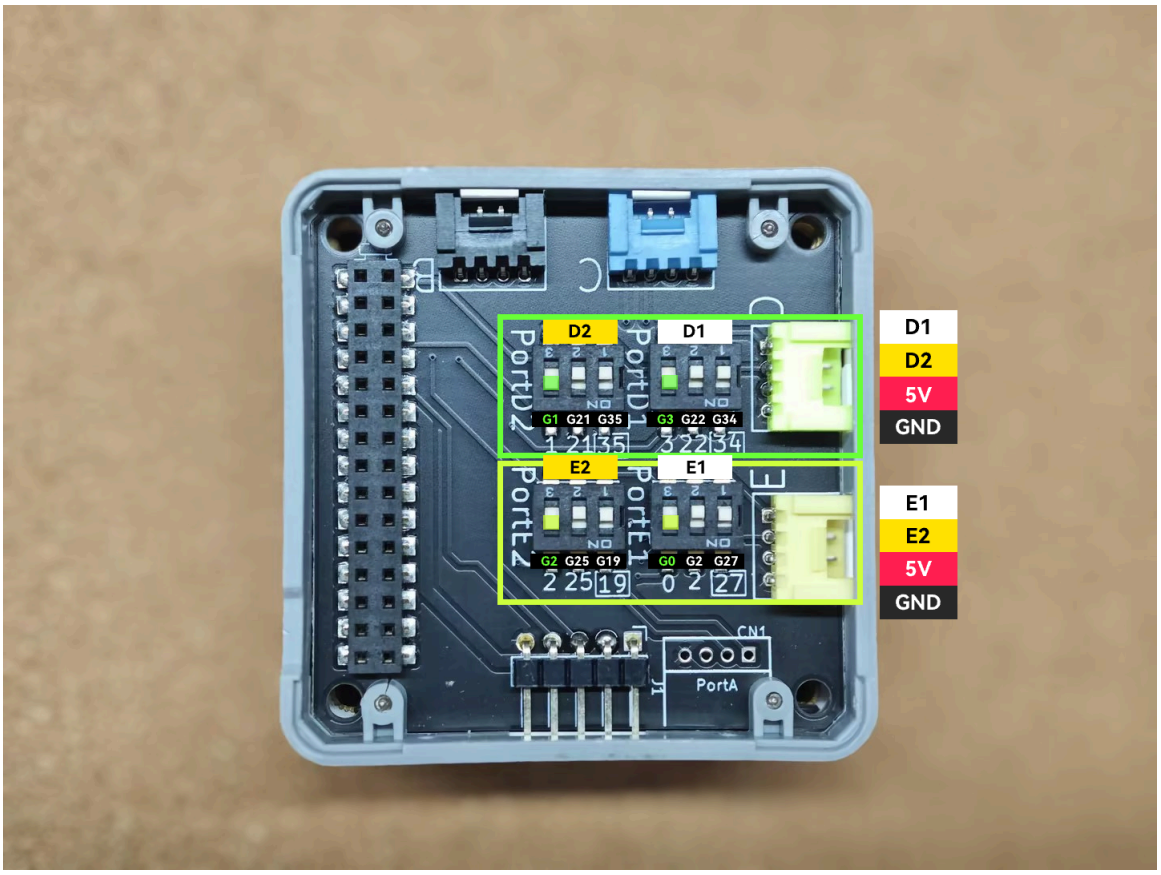


Schematics

Designed by @akita



- Module ExtPort For Core2 Schematics PDF

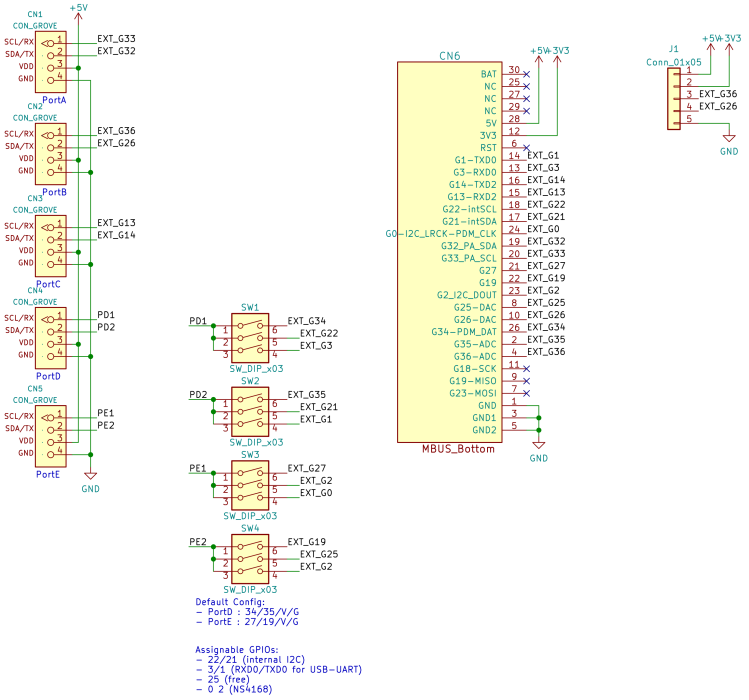

PinMap

HY2.0-4P

The pins marked with are the default pins.

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	G26	G36
PORT.C	GND	5V	G14	G13
PORT.D	GND	5V	G35	G34
PORT.E	GND	5V	G19	G27

Note: The pin assignment of Port D/E can be configured by each 3p switch to one of the following assignments

- PortD-1 (White wire) : 34 (Default) / 22 (Internal I2C-SCL) / 3 (RXD0)
- PortD-2 (Yellow wire) : 35 (Default) / 21 (Internal I2C-SDA) / 1 (TXD0)
- PortE-1 (White wire) : 27 (Default) / 2 (NS4168-DATA) / 0 (NS4168-LRCK)
- PortE-2 (Yellow wire) : 19 (Default) / 25 / 2 (NS4168-DATA)



M5-Bus

> **Switch**
>
> The pins marked `SW` in the M5-Bus below can be toggled via DIP switches to adapt to different host devices.


PIN	LEFT	RIGHT	PIN
GND	1	2	PORT.D (SW)
GND	3	4	PORT.B
GND	5	6	
	7	8	PORT.E (SW)
	9	10	PORT.B
	11	12	3V3
PORT.D (SW)	13	14	PORT.D (SW)
	15	16	
PORT.D (SW)	17	18	PORT.D (SW)
PORT.A	19	20	PORT.A
PORT.E (SW)	21	22	PORT.E (SW)
PORT.E (SW)	23	24	PORT.E (SW)
	25	26	PORT.D (SW)
	27	28	5V
	29	30	

2.54-5P Male Header

1	2	3	4	5
5V(+5V)	3V3(+3.3V)	G36	G26	GND

Model Size

Module ExtPort For Core2 Model Size PDF

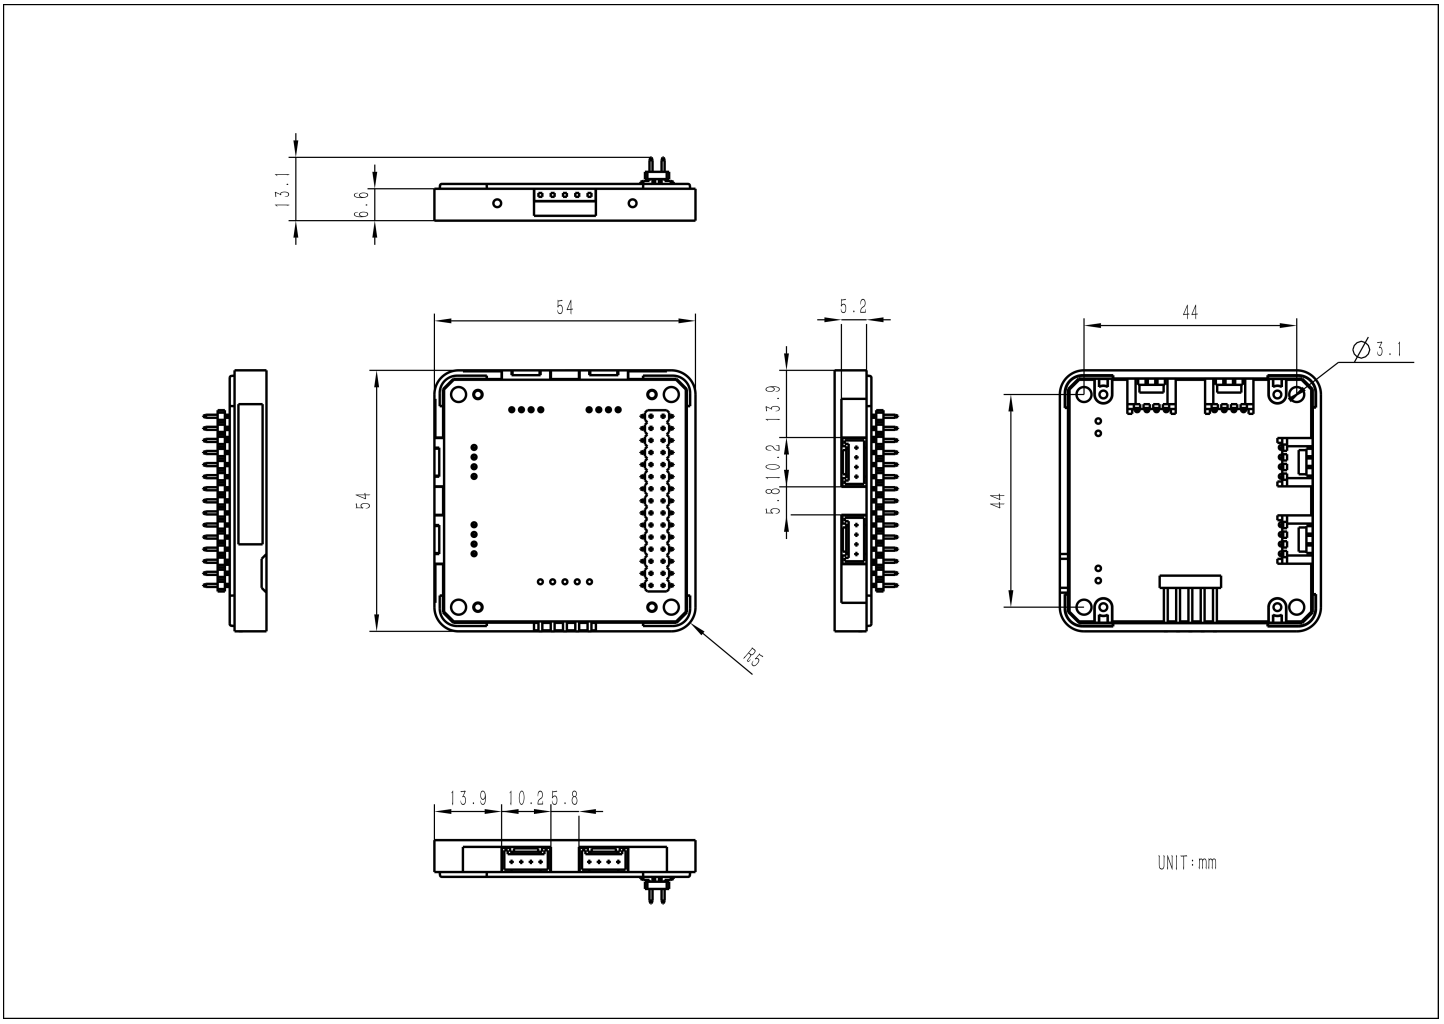

PCB

- Module ExtPort For Core2 KiCad Project

Datasheets

- M5Stack Hands-on Materials From Japanese