Unit HEX

SKU:A045









Description

Unit HEX is a hexagonal RGB LED light board equipped with 37 RGB LED beads. It features dedicated input/output ports and supports series expansion with multiple boards, allowing flexible construction of diverse lighting arrays.

Features

- Number of LED colors: 16.7 million
- Development platforms: Arduino, UIFlow (Blockly & Python)

Includes


- 1 x Unit HEX
- 1 x HY2.0-4P Grove cable (20cm)

Specifications


Specification	Parameter
RGB LED	SK6812 x 37
Product Size	31.2 x 36.0 x 7.0mm
Product Weight	4.6g
Package Size	138.0 x 93.0 x 12.0mm
Gross Weight	10.0g

Learn

The following is the LED layout sorting method in the HEX light board.

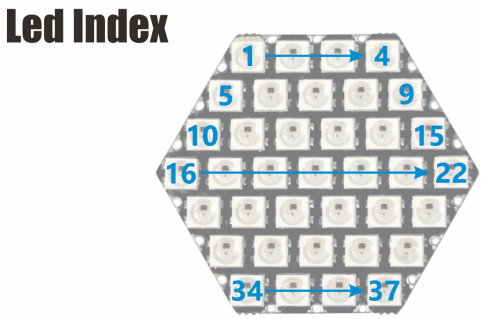

Schematics Diagram

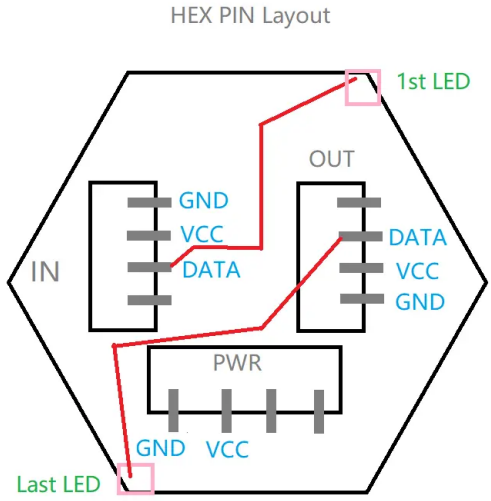


PinMap

Unit HEX

HY2.0-4P	Black	Red	Yellow	White
PORT.B	GND	5V	LED Signal	/


Model Size

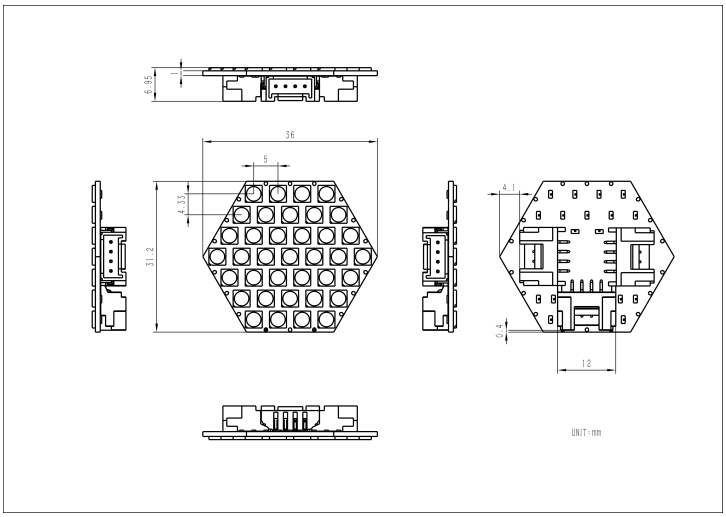

Softwares


Arduino


- FastLED Arduino Library
- Unit HEX Test Example

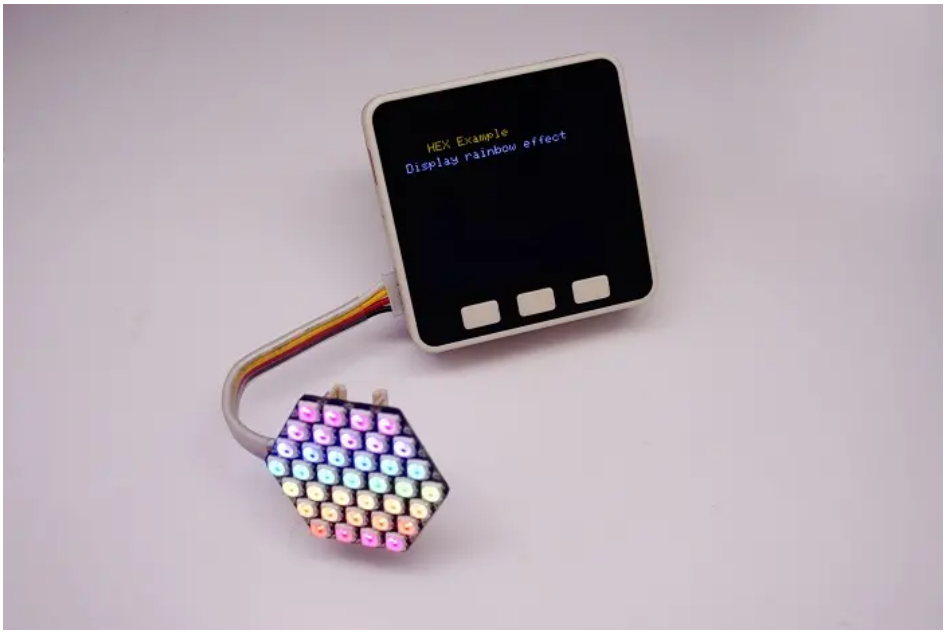



UiFlow1


- Unit HEX Test Example

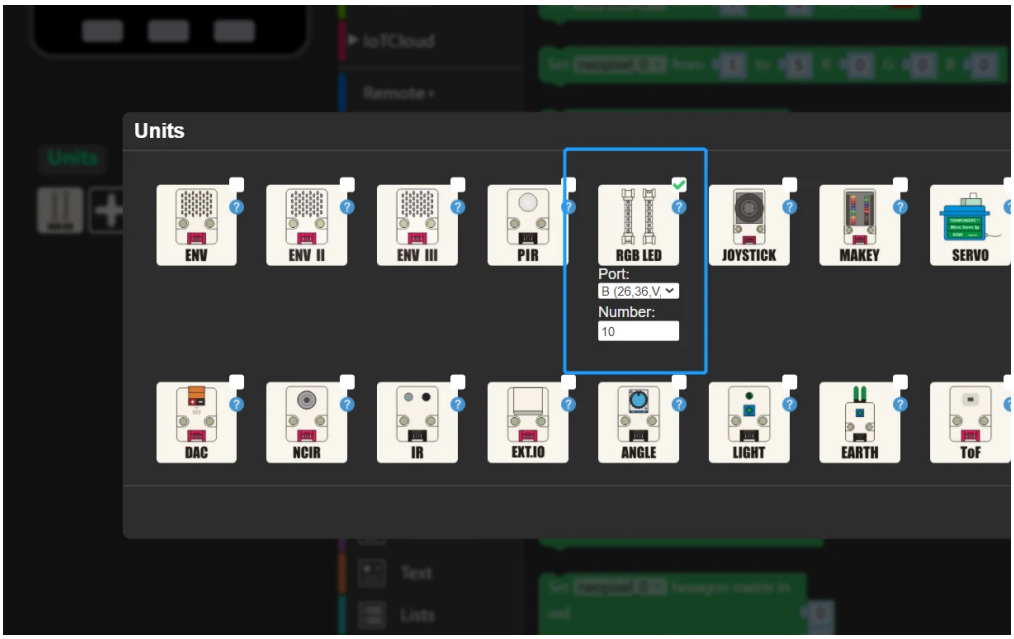
Units
ENV
ENV II
ENV III
PIR
RGB LED
Port:
B (26,36,V
Number:
10
JOYSTICK
MAKEY
SERVO
DAC
NCIR
IR
EXTIO
ANGLE
LIGHT
EARTH
ToF

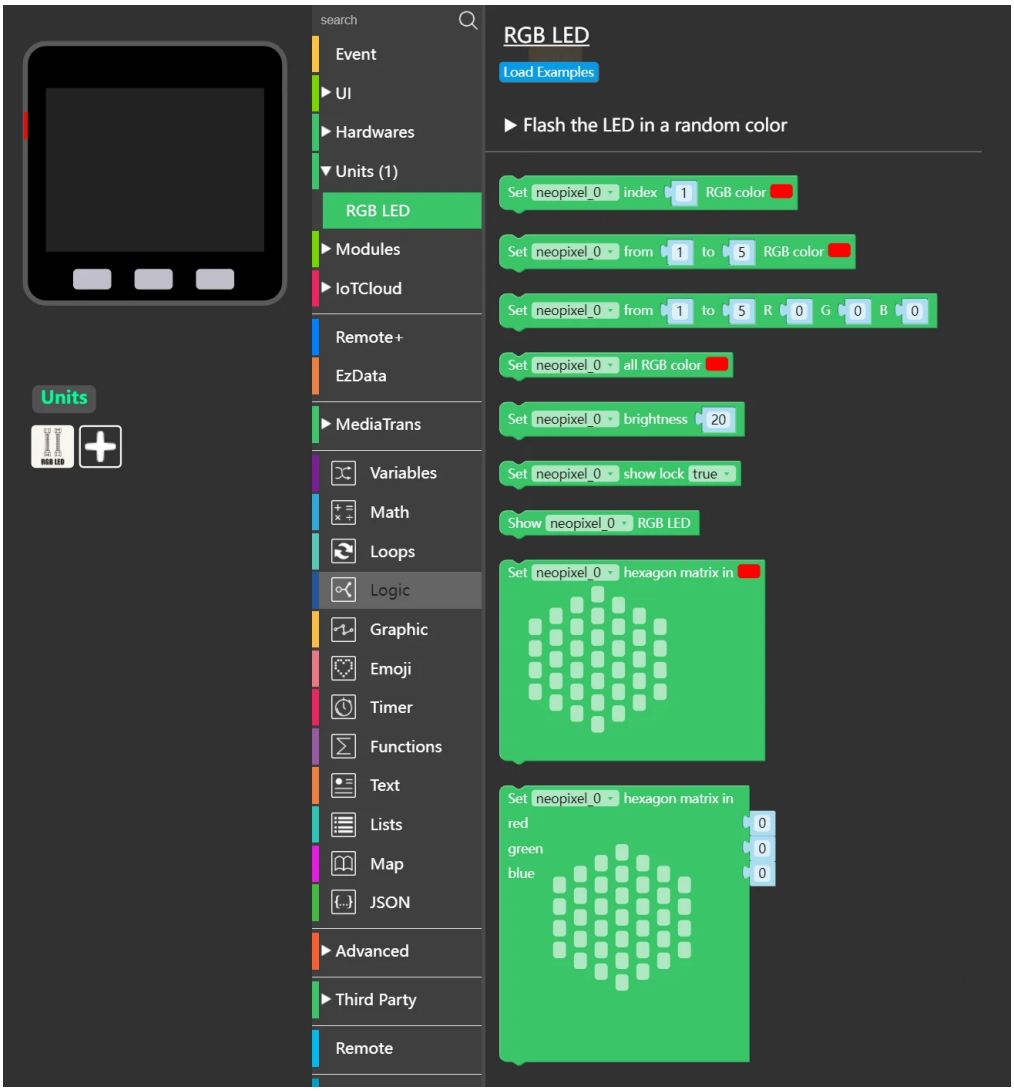
search
Event
UI
Hardwares
Units (1)
RGB LED
Modules
IoTCloud
Remote+
EzData
MediaTrans
Variables
Math
Loops
Logic
Graphic
Emoji
Timer
Functions
Text
Lists
Map
JSON
Advanced
Third Party
Remote
Units
RGB LED
Load Examples
Flash the LED in a random color
Set neopixel_0 index 1 RGB color
Set neopixel_0 from 1 to 5 RGB color
Set neopixel_0 from 1 to 5 R 0 G 0 B 0
Set neopixel_0 all RGB color
Set neopixel_0 brightness 20
Set neopixel_0 show lock true
Show neopixel_0 RGB LED
Set neopixel_0 hexagon matrix in
Set neopixel_0 hexagon matrix in
red 0
green 0
blue 0

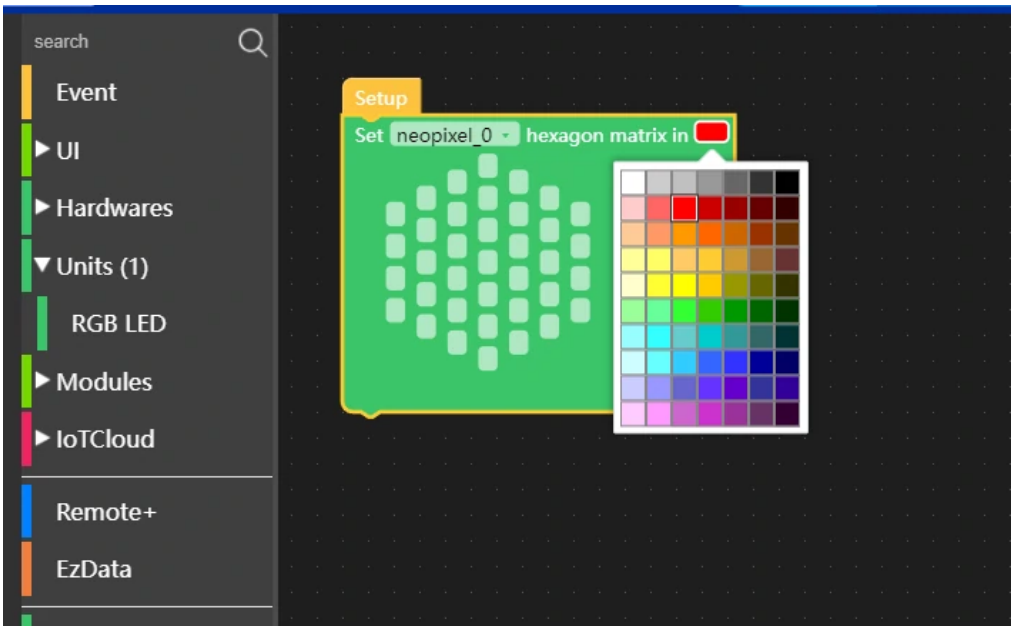
search
Event
UI
Hardwares
Units (1)
RGB LED
Modules
IoTCloud
Remote+
EzData
Setup
Set neopixel_0 hexagon matrix in

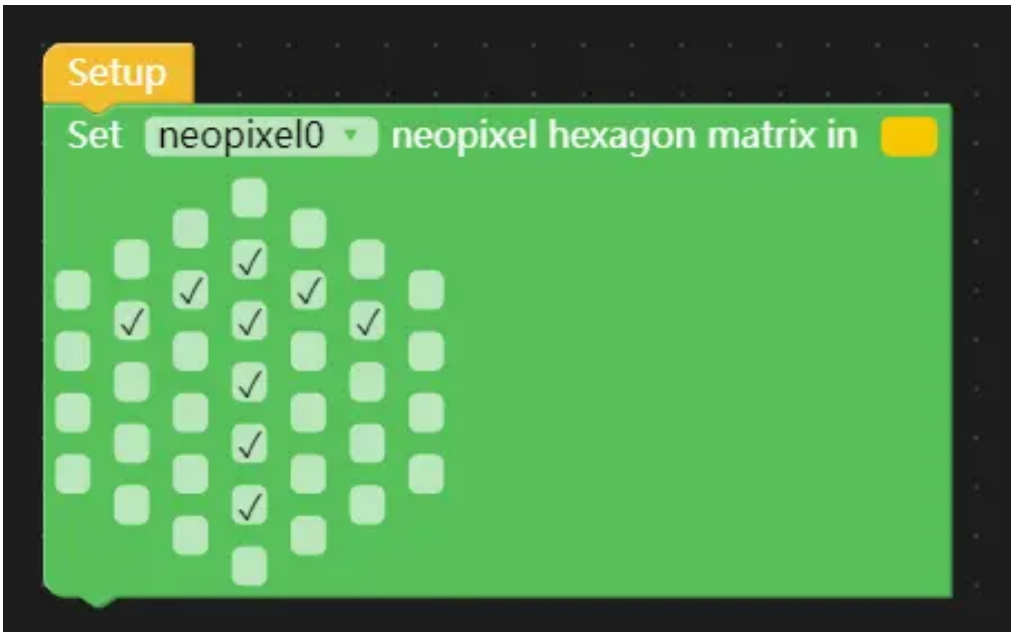
Setup
Set neopixel0 neopixel hexagon matrix in

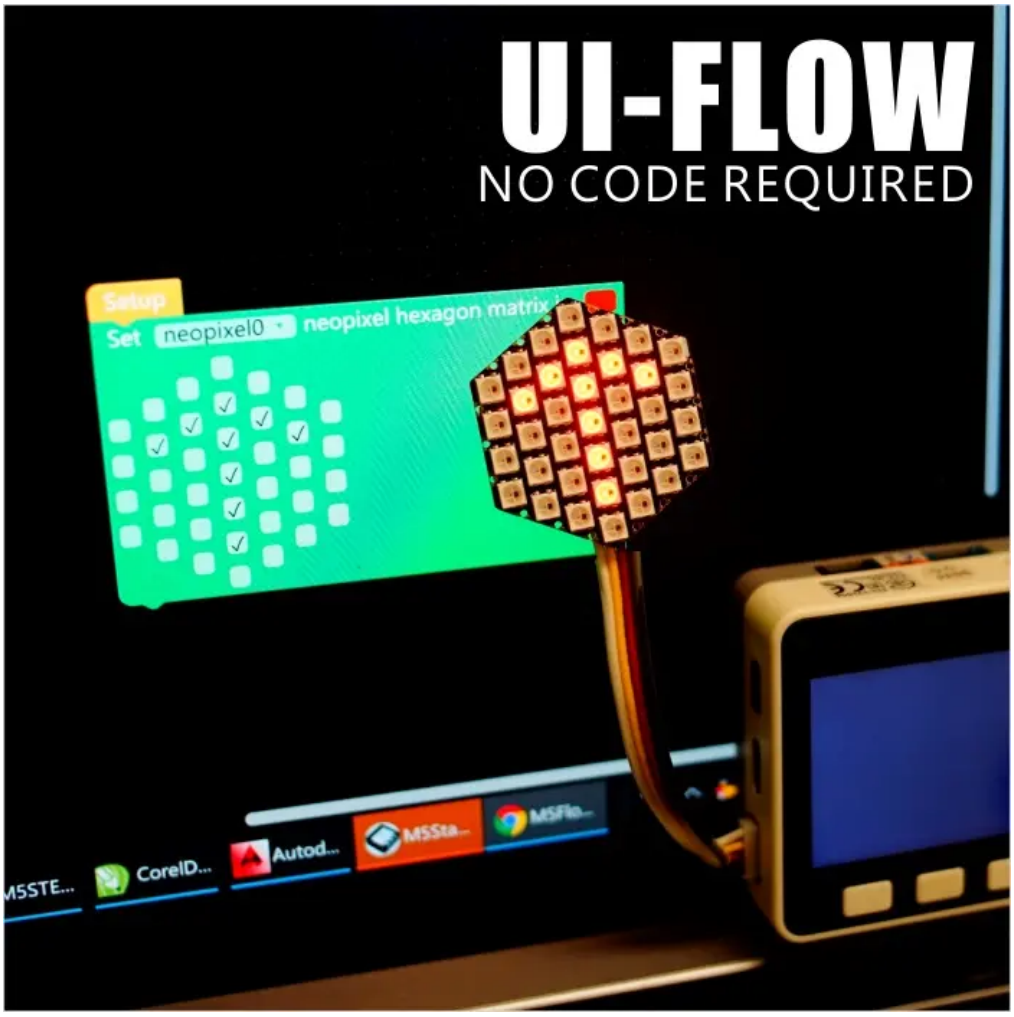

EasyLoader

Easyloader	Download Link	Remarks
Unit HEX Test Easyloader	download	/

Video

HEX_UNIT.mp4