

Module COMMU

SKU:M011





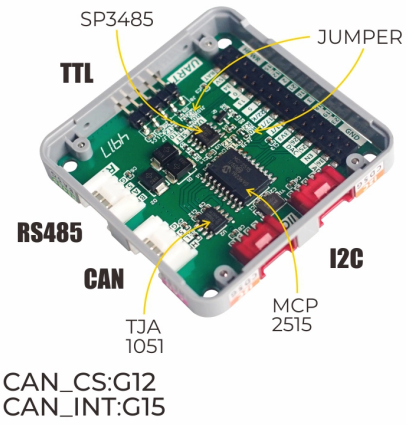



Description

Module COMMU is a communication conversion module in the M5Stack stackable module series. It integrates 2 **I2C** interfaces, 1 **TTL** interface, 1 **CAN** interface, and 1 **RS485** interface, capable of meeting various communication conversion needs encountered during development.

Note

Note

When used with Core2, the base must be removed to normally burn programs.

Features

- Supports multiple communication protocols such as I2C, TTL, RS485, and CAN


Includes

- 1 x Module COMMU

Specifications

Specification	Parameter
Interface	I2C x2, CAN x1, RS485 x1, TTL x1
CAN Controller	MCP2515-1/SO
RS485 Transceiver	SP3485EN-L/TR
Material	Plastic (PC)
Product Weight	13.5g
Gross Weight	24g
Product Size	54.2 x 54.2 x 13.0mm
Package Size	133.0 x 95.0 x 16.0mm

Schematics

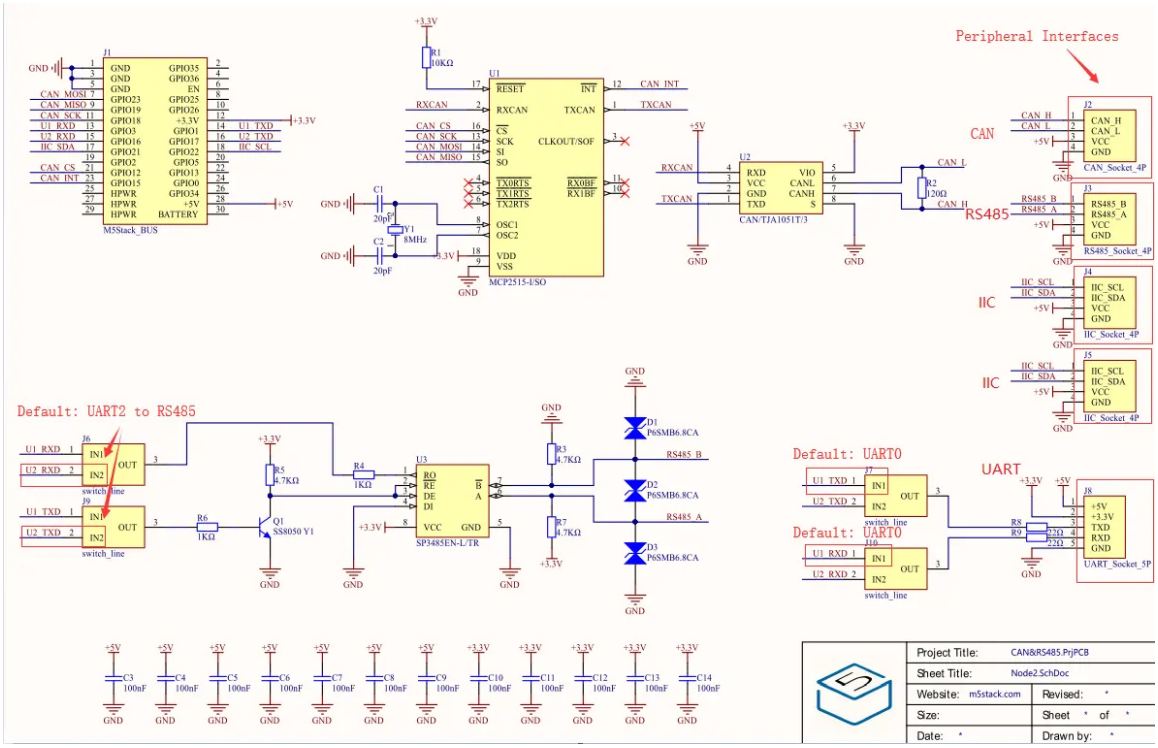


PinMap

M5-Bus

PIN	LEFT	RIGHT	PIN
GND	1	2	
GND	3	4	
GND	5	6	
SPI_MOSI	7	8	
SPI_MISO	9	10	
SPI_CLK	11	12	
UART_TX0	13	14	UART_RX0
RS485_TX	15	16	RS485_RX
I2C_SDA	17	18	I2C_SCL
	19	20	
CAN_CS	21	22	
CAN_INT	23	24	
	25	26	
	27	28	5V
	29	30	

Model Size

Module COMMU Model Size PDF

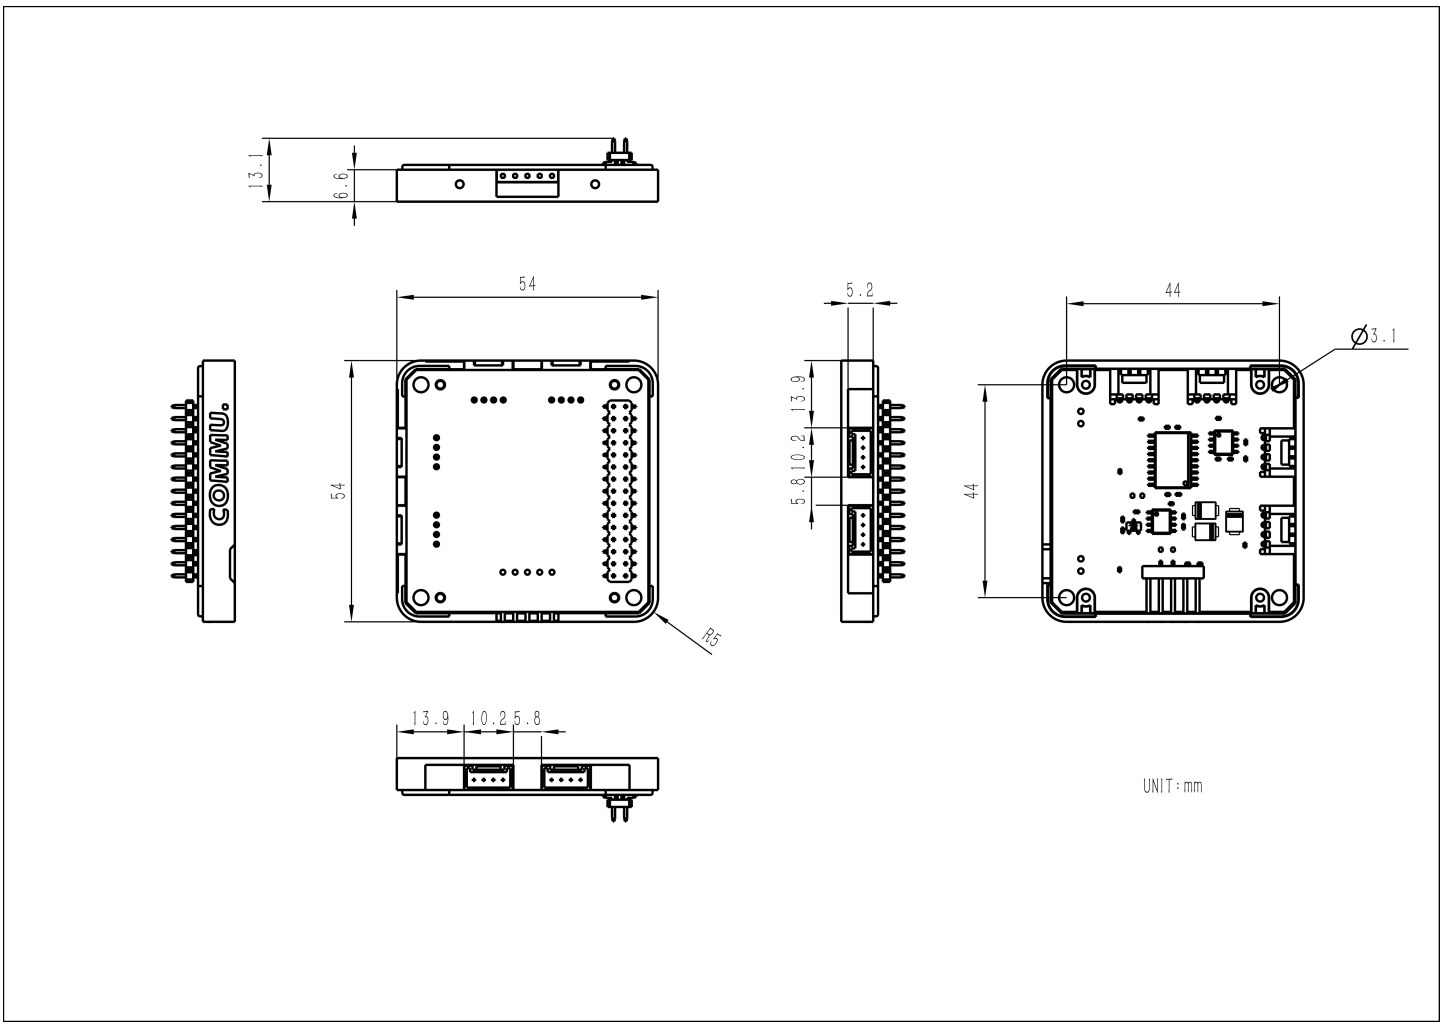

Datasheets

- SP3485
- MCP2515

Softwares

Arduino

- Module COMMU Arduino Quick Start
- Module COMMU Example with M5Core

UiFlow1

- Module COMMU UiFlow1 Docs

UiFlow2

- Module Commu UiFlow2 Docs

Easyloader

Easyloader	Download	Note
Module COMMU Example Easyloader with M5Core	download	/

Video

COMMU.mp4