

Hidden keys in Qt-DAB

Jan van Katwijk, Lazy Chair Computing
The Netherlands


August 17, 2026

In recent versions of Qt-DAB some buttons were removed, and the functionality replaced by clickable labels or icons. This was done - mainly - to bring some functionality to the main window without adding an enormous list of buttons.

Here we briefly specify the *clickable elements*, all *clickable labels* in Qt, in the main window of Qt-DAB.


The ensemble name The *ensemble name* as specified on the top left is written onto a *clickable label*.

Clicking with the *left hand* mouse button on this area (assuming Qt-DAB already decoded the ensemble name) shows (or - if visible - hides) the content table as show below.

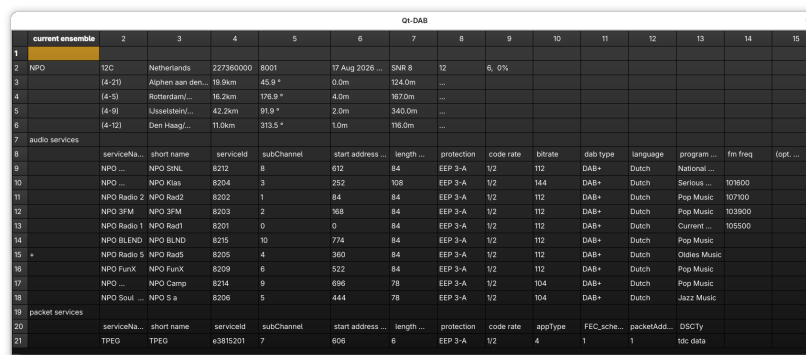

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	current ensemble													
2	NPO	12C	Netherlands	227360000	8001	17 Aug 2026 ...	SNR 8	12	6	0%				
3	(4-21)	Alphen aan den Rijn	19.9km	45.9 °	0.0m	124.0m	...							
4	(4-9)	Rotterdam	18.2km	138.9 °	2.0m	197.0m	...							
5	(4-9)	Utrecht	42.2km	91.9 °	2.0m	340.0m	...							
6	(4-12)	Den Haag	11.8km	313.5 °	1.0m	186.0m	...							
7	audio services													
8	serviceName	short name	serviceId	subChannel	start address ...	length ...	protection	code rate	bitrate	dab type	language	program ...	freq	opt. ...
9	NPO	NPO 3NL	8212	8	612	84	EEP 3-A	1/2	112	DAB+	Dutch	National ...		
10	NPO	NPO Klas	8204	3	252	108	EEP 3-A	1/2	144	DAB+	Dutch	Serious ...	107600	
11	NPO Radio 2	NPO Radio 2	8202	1	84	84	EEP 3-A	1/2	112	DAB+	Dutch	Pop Music	107300	
12	NPO 3FM	NPO 3FM	8203	2	168	84	EEP 3-A	1/2	112	DAB+	Dutch	Pop Music	103900	
13	NPO Radio 1	NPO Radio 1	8201	0	0	84	EEP 3-A	1/2	112	DAB+	Dutch	Current ...	105500	
14	NPO Radio 5	NPO Radio 5	8205	10	774	84	EEP 3-A	1/2	112	DAB+	Dutch	Pop Music		
15	NPO Radio 5	NPO Radio 5	8205	4	360	84	EEP 3-A	1/2	112	DAB+	Dutch	Oldies Music		
16	NPO Radio 6	NPO Radio 6	8206	6	522	84	EEP 3-A	1/2	112	DAB+	Dutch	Pop Music		
17	NPO	NPO Camp	8214	9	696	78	EEP 3-A	1/2	104	DAB+	Dutch	Pop Music		
18	NPO Soul	NPO Soul	8206	5	444	78	EEP 3-A	1/2	104	DAB+	Dutch	Jazz Music		
19	packet services													
20	serviceName	short name	serviceId	subChannel	start address ...	length ...	protection	code rate	appType	FEC_sche...	packetAdd...	DSCTy		
21	TPEG	TPEG	e3815201	7	608	6	EEP 3-A	1/2	4	1	1	1	tdc data	

Clicking with the *right hand* mouse button on the ensemble name, again under the assumption that an ensemble was detected, starts - or stops - dumping the input samples into a file. First a menu appears where a filename can be specified, then a small window appears, showing the progress of the dumping.




The *configuration and control* window contains a selector labeled *input dump in xml* (set by default) that - when set - tells Qt-DAB to use the xml format for dumping, if not set the PCM

(i.e. ".wav") is used. Note that Qt-DAB is perfectly able to generate (and read back) PCM type files larger than 4 Gb.

The copyright symbol




The copyright symbol is written onto a clickable label, touching controls the visibility of a small window, showing some technical information and acknowledgements.

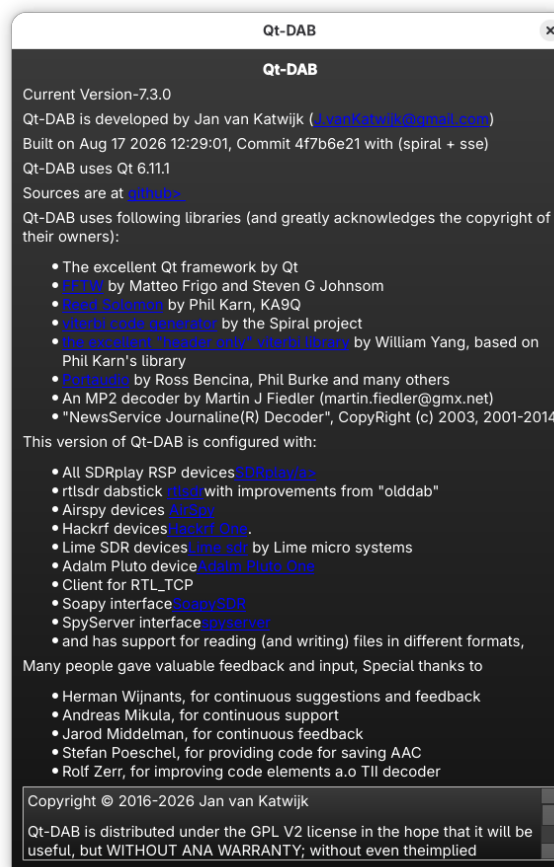

The blue/yellow icon




The *blue/yellow* icon is shown on a clickable label, touching the label with the mouse instructs Qt-DAB to show in a separate window the directory (folder) in which Qt-DAB stores items as slides, some dumps etc.

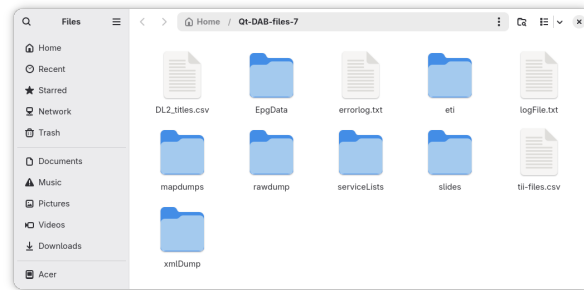

The blue icon




The *small blue* icon is shown on a clickable label, touching the label with the mouse controls the visibility of a small separate window with a list of configured devices

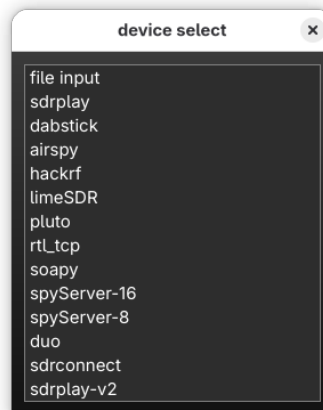


The SNR indicator




The SNR indicator at the top right of the window is displayed on a clickable label, touching it controls the visibility of a small separate window, showing the progress of the SNR in time

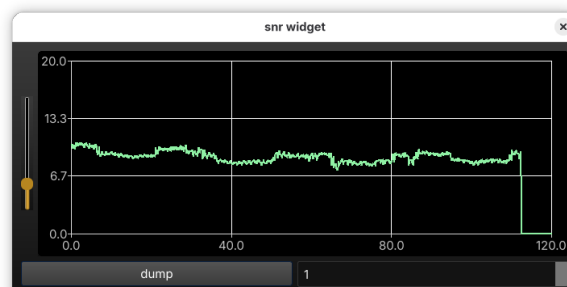

The list/book style style indicator




The *list/book style* icon on the second line is displayed on a clickable label, touching it controls the visibility of the *technical data*, where info on the selected audio service is displayed. Since version 7.3.0 the technical

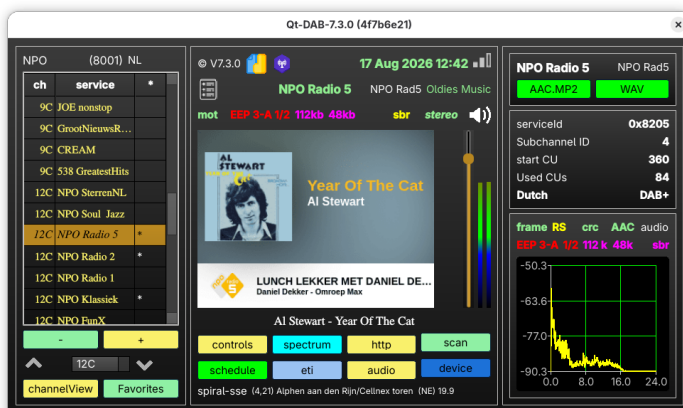


data is implemented as a separate frame in the main window.

The EPG icon



The *EPG icon* is displayed on a clickable window. It is ONLY shown if the current ensemble contains an EPG/SPI type service. In the Netherlands, the ensembles do not contain such a service, the icon is not shown. If the icon is shown, it controls the visibility of a small window displaying potential EPG (i.e. Electronic Program Guide) data.

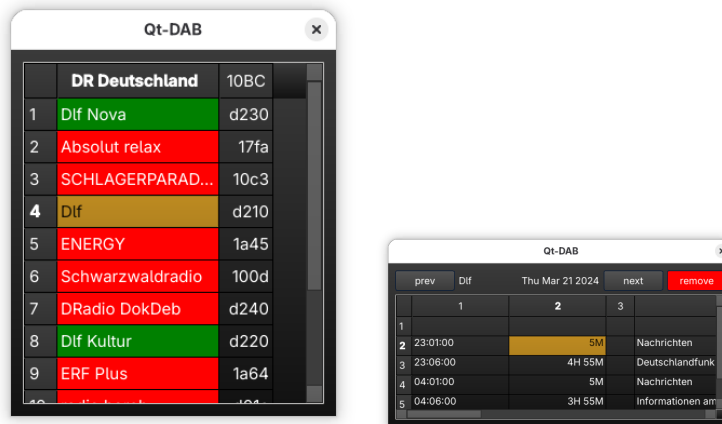


Note that building up EPG data takes time.

The speaker symbol




The speaker symbol shows whether or not sound is emitted. The icon itself is - as the others mentioned here - displayed on a clickable label.

Touching with the *left hand* mouse button controls *muting* the audio. On clicking the audio is muted and the main window shows a counter telling the duration of muting the sound. Of course, clicking again stops muting.

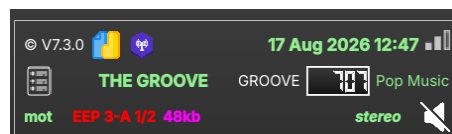

When touching with the *right hand* mouse button, a small separate window shows where the (maximum) duration of muting can be set in minutes. As expected, clicking for a second time hides this window.



Touching the transmitter line The bottom line of the right (middle) part of the main window shows the name of one of the transmitters, detected by Qt-DAB in the current ensemble. The text is displayed on a clickable label, touching it controls the visibility of a separate window showing details of ALL transmitters detected in the current channel.


TII data: channel 12C ensemble: NPO

	x	pat	tii	phase	strength	azimuth	dist	power	alt	height	dir	delay	transmitter
1	***	0x1e	04-05	13.4	-0.2	176.9 °	16.2 km	5.0 KW	4 m	167 m		111.0 samples	Rotterdam/Cellnex toren
2		0x1e	04-09	72.0	-3.2	91.9 °	42.2 km	8.0 KW	2 m	340 m		288.1 samples	IJsselstein/Cellnex ...
3		0x1e	04-21	17.7	-4.6	45.9 °	19.9 km	12.6 KW	0 m	124 m		135.7 samples	Alphen aan den Rijn/Cellnex toren
4		0x1e	04-12	55.2	-10.8	313.5 °	11.0 km	4.5 KW	1 m	116 m		75.0 samples	Den Haag/Cellnex toren

Coloring buttons Personally I want to have some control on the color of things, two different types of items come into mind, coloring the buttons and coloring the displays. Both are possible, the coloring the latter is discussed elsewhere.



For all buttons used in QT-DAB's gui (one exception), the colors can be set. Touching with the *right hand* mouse button a button on the GUI shows a color selector

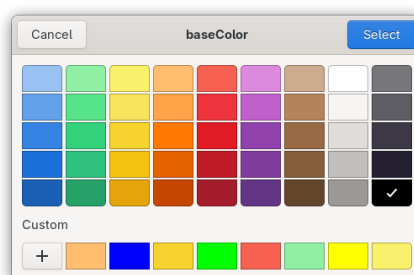

For changing a button color the following steps have to be taken:

1. click with the *right hand* mouse button on the button;
2. select a color on the color selector, the first selection is the background color;
3. select a second color on the color selector, the second selection is the text color.

Obviously, the color settings are kept between program invocations.

Disclaimer Qt-DAB is developed as hobby program in spare time. Being retired I do have (some) spare time and programming Qt-DAB (and my other programs) is just hobby. It is important to notice that Qt-DAB is - both the sources as the precompiled versions - available *as is*. While it is - obviously - nice if the Qt-DAB software is useful, there are no guarantees, however. If the software does not fit your purpose, or you have problems building an executable, recall that the Qt-DAB software is distributed in the hope that it will be useful, but **WITHOUT ANY WARRANTY**; without even the implied warranty of **MERCHANTABILITY** or **FITNESS FOR A PARTICULAR PURPOSE**. See the GNU General Public License for more details.

If, however, the software seems useful and you have suggestions for improving and/or extending it, feel free to contact me, suggestions are always welcome (although no guarantees are given that they will be applied.)