










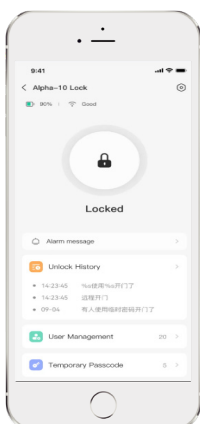


SL100WB

Sentinel

Meet the ISEFY Sentinel SL100WB, a fusion of security and convenience. With a battery life of up to 12 months, enjoy hassle-free performance. Unlock in seconds with Instant Biometrics, or choose from various access methods including cards, passwords, and keys. Manage your lock effortlessly through a Wi-Fi Enabled mobile app, featuring user management and real-time alerts. The simple installation is compatible with most US & CA latchsets and can be done in just 15 minutes. Built to last, enduring over 100,000 cycles, and alerts you to suspicious activities. It thrives in all-weather conditions with an IP54 rating, ensuring reliable operation from -30° F to 55° F. Experience the future of home security with ISEFY Sentinel SL100WB — smart, convenient, and simple.

- | | | |
|---|--|---|
|  Five Unlocking Methods
Supply fingerprint, Card, Password, Once-time password, Mechanical Key. |  Multidimensional Fingerprint
Multidimensional biometric comparison effectively prevents fake fingerprints. |  Once-Time Password
Guest use it once, and the effective time can be set. |
|  Anti-peep Phantom Password
Supports up to 10 sets of phantom passwords with 6 to 12 digits. |  Easy Setup Without Bridge
Directly connect to router via WiFi. |  No Battery Fear
4*AA battery for 12 month. |
|  Auto-Lock
Count-down Auto-Lock via APP. |  APP Remote Management
Supports user management, door opening record, real-time status checks. |  Abnormal Event Alert
Supports Illegal User Forced Lock Alarm, Door Lock Anomaly Alert, Low Battery Warning. |



Stay close with what you care

Utilizing the smart ecosystem of the APP, as long as the Internet is available, you can access the content you care about. You can manage your devices on the APP, set user permissions, and check the status and messages of the door lock anytime, anywhere..

Specifications

Applicable Scenarios

Suitable Door Thickness:35~55mm

Positioning Dimensions:Door edge distance 60 or 70mm

Installation Location: Doors with eaves or indoors.

Opening Method

Card Type Used:Mifare 1

Sensitivity Distance:<10mm

Sensitivity Time:<0.5 seconds

Password Length:6 to 12 digits

Password Capacity:50 sets

Fingerprint Module: Capacitive (biometric technology)

Fingerprint Capacity :50 fingerprints

APP Management

User Management

Real Time Notification

Door set

Low Battery Notification

Network

Wi-Fi:IEEE802.11b/g/n, 2.4GHz

ISEFY App: iOS, Android

Auxiliary Interface

Outdoor Unit:

Built-in Speaker

Full touch buttons

Indoor Unit:

Mechanical Quick-Release Knob

Electronic Door Opening Button

Reset Button

General

Color: Metal Gray

Panel Material: Aluminum Alloy

Battery Life: Approximately 12 months (with 10 uses per day)

Power Source: 4 * AA

Emergency Charging: Type-C

Working Environment:-30°C~+55°C (Outdoor Unit) ,
0°C~+55°C (Indoor Unit) , Less Than 95%RH

Protection Level: IP54 (Outdoor Unit), IP52 (Indoor Unit)

What's in the box

- 1x Outdoor Unit
- 1x Indoor Unit
- 1x Quick Start Guide
- 2x Mechanical Key
- 2x M1 Card
- 1x Installation Position Map
- 4x AA
- 1x Deadbolt
- 1x Installation Accessory Kit