
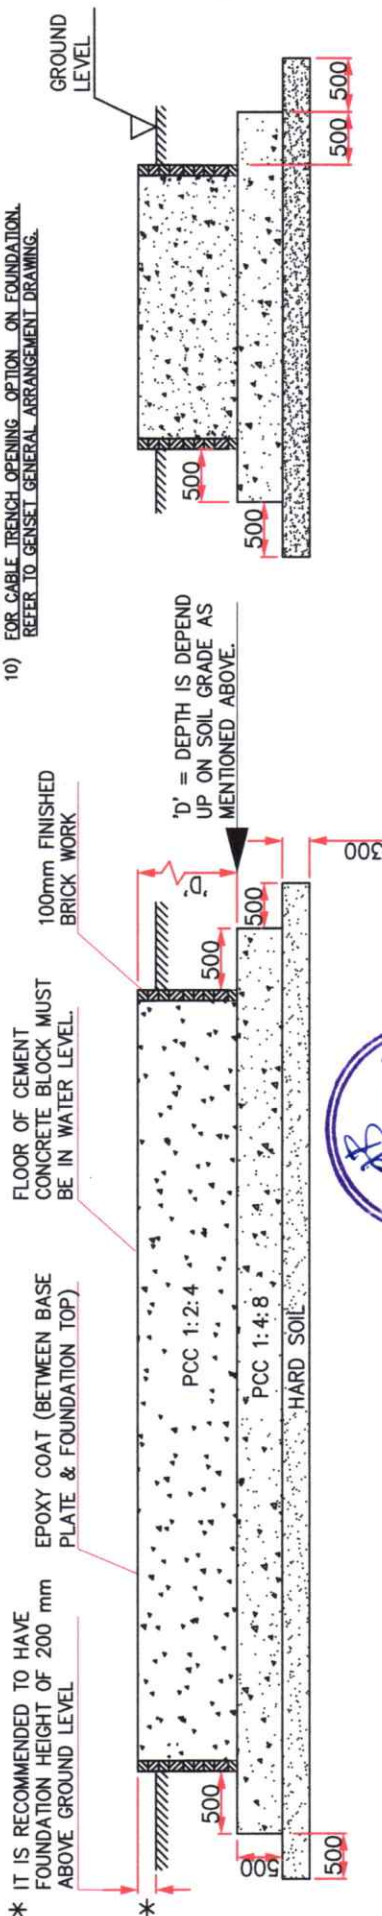


NOTES: -1) FOUNDATION TO BE MADE ON A GOOD PREPARED SURFACE WITH SOIL STRATA BEARING CAPACITY ADEQUATE TO SUPPORT THE WEIGHT OF GENSET & FOUNDATION. REFER CHART FOR SOIL STRENGTH.

NATURE OF LOAD BEARING MATERIAL	SAFE BEARING CAPACITY KG/50MM
HARD ROCK GRANITE	2,44,100 - 9,76,400
MEDIUM ROCK SHELL	1,48,600 - 1,48,600
HARD PAN	78,100 - 97,600
SOFT ROCK	48,800 - 58,800
HARD CLAY	36,000 - 48,800
GRAVEL AND COARSE SAND	36,000 - 48,800
LOOSE-MEDIUM COARSE AND COMPACTED FINE SAND.	29,300 - 36,000
MEDIUM CLAY	18,500 - 36,000
LOOSE FINE SAND	9,750 - 36,500
SOFT CLAY	9,750

- 2) THE LENGTH & WIDTH OF FOUNDATION SHOULD BE AT LEAST 300 mm MORE ON EACH SIDE THAN GENSET LENGTH & WIDTH RESPECTIVELY.
- 3) CHECK THE FOUNDATION LEVEL DIAGONALLY AS WELL AS ACROSS THE LENGTH & WIDTH FOR EVEN FLATNESS AND SAME SHOULD BE WITHIN $\pm 50\text{mm}$ IN HORIZONTAL PLANE IN ANY ONE DIRECTION ONLY.
- 4) ENSURE THAT THE CONCRETE IS COMPLETELY CURED BEFORE POSITIONING THE GENSET.
- 5) ENSURE THAT THE FOUNDATION TO SUPPORT 1.5 TIMES (DYNAMIC LOAD) OF THE TOTAL NET WEIGHT OF THE SINGLE GENERATING SET INSTALLATION & 2 TIMES OF THE TOTAL NET WEIGHT FOR THE MULTIPLE GENERATING SET INSTALLATION.
- 6) FOR ROOFTOP INSTALLATION IT IS NECESSARY TO HAVE PLANNING AND STRUCTURAL DESIGN APPROVAL.
- 7) DO NOT INSTALL GENSET ON LOOSE SAND OR CLAY.
- 8) AVOID HARD/SHARP PROJECTIONS SUCH AS STONE OR STEEL PARTS ON FOUNDATION SURFACE WHICH MAY DAMAGE FUEL TANK AT BOTTOM.
- 8) AVOID UNEVEN FOUNDATION WHICH MAY LEAD TO IMPROPER RESTING OF GENSET ON FOUNDATION, THERE BY LEADING TO LEAKAGE OF SOUND AND VIBRATION ON GENSET.
- 9) IF GENSET IS TO BE MOUNTED ON FOUNDATION HAVING UNEVEN SURFACE UNDER UNAVOIDABLE CIRCUMSTANCES USE APPROPRIATE THICKNESS OF RUBBER MATTING ABOVE FOUNDATION FOR POSITIVE SEALING OF GENSET WITH BASE.
- 10) FOR CABLE TRENCH OPENING OPTION ON FOUNDATION, REFER TO GENSET GENERAL ARRANGEMENT DRAWING.

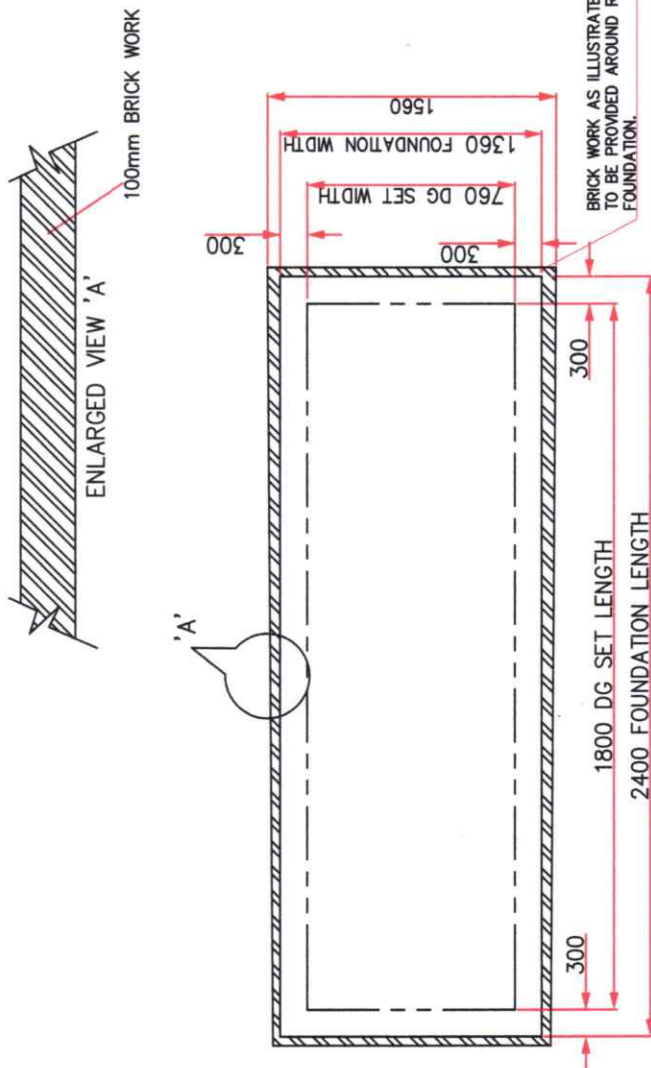

KALA GENSET PVT LTD.
PUNE 410501 (INDIA)



UNLESS OTHERWISE SPECIFIED • ALL DIMENSIONS ARE IN INCH. • UNMENTIONED TOLERANCES AS PER ASTM A11001. • REMOVE ALL SWIRL MARKS AND SHARP EDGES.	PROJECT/ CUSTOMER NAME		CAD DRG. FILE	MATERIAL
	UNMENTIONED		DIN	MONVAL
	RADI	CHD.	CHD.	MBT
	CHAMFER	APPO.	MBT	DATE
	UNDERCUT			01.02.2024

			REF. DATE
			APPROVED BY
			MODIFIED BY

REVISION

	Rev. No.

PRODUCT IMPROVEMENT IS A CONTINUOUS PROCESS.DIMENSION SPECIFICATION MAY CHANGE WITH IMPROVEMENT. KINDLY CONTACT KOEL FOR LATEST INFORMATION	PRINTS OF PREVIOUS REVISION NO. SHOULD BE SCRAPPED
---	--

GEOMETRIC	TOLERANCE SYMBOLS (P1-1)-1985.
STRAIGHTNESS	
FLATNESS	
ROUNDNESS	
CYLINDRICITY	
PROFILE OF A LINE	
PROFILE OF A SURF	
PARALLELISM	
PERPENDICULARITY	

DO NOT SCALE THE DRAWING

IF IN DOUBT ASK

FROM UP TO	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000	1000-2000	2000-4000
DEVIATION mm	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2

DEVIATION ON NON TOLERANCED LINEAR		RUN OUT
MACHINED DIMENSIONS, 15:2102 (P1-1)-1993		ANGULARITY
		CONCENTRICITY
		SYMMETRY
		M.C.
		TRUE POSITION
		DATUM

GEOMETRIC TOLERANCE SYMBOLS (AS 8000 (P1-1)-1985)	
—	STRAIGHTNESS
▤	FLATNESS
○	ROUNDNESS
⊙	CYLINDRICITY
⌒	PROFILE OF A LINE
⌓	PROFILE OF A SURFACE
∥	PARALLELISM
⊥	SQUARENESS