

Guidelines to endpoint creation for the Web Service used in “Comunicação AT – Documentos de Transporte”

Objective

Provide guidelines on the ABAP proxy configuration that you use to call fiscal authority Web Service for delivery communication.

Prerequisites

Ensure that you have performed the following settings in order to use the Web Service communication channel:

- Web Services Runtime

Configure the Web Service runtime using the following links:

- http://help.sap.com/saphelp_nw70/helpdata/en/46/abbc05ba0c2a7fe10000000a1553f6/content.htm?frameset=/en/46/abbc05ba0c2a7fe10000000a1553f6/frameset.htm
- http://help.sap.com/saphelp_nw70ehp1/helpdata/en/46/abbc05ba0c2a7fe10000000a1553f6/content.htm?frameset=/en/46/abbc05ba0c2a7fe10000000a1553f6/frameset.htm
- http://help.sap.com/saphelp_nw70ehp2/helpdata/en/46/abbc05ba0c2a7fe10000000a1553f6/content.htm?frameset=/en/46/abbc05ba0c2a7fe10000000a1553f6/frameset.htm
- http://help.sap.com/saphelp_nw70ehp3/helpdata/en/46/abbc05ba0c2a7fe10000000a1553f6/content.htm?frameset=/en/46/abbc05ba0c2a7fe10000000a1553f6/frameset.htm

- Kernel Patch

- Install a kernel with patch level that corresponds to the patch level specified under the *SP Patch Level* tab of SAP Note 1526521.
- Download your kernel patch using the instructions mentioned in SAP Note 19466.
- Check your kernel patch level by choosing the *Release Notes* button in transaction **SM51**.
- With regards to kernel 721 upgrade/patch, refer to SAP Notes 1728283, 1713986, and 1716826.

- SAP Cryptolib

- We recommend that you implement the later version of SAP Cryptolib. Note that PL30 is the lowest level that needs to be implemented.
- Refer to SAP Note 455033 for installing and activating SAP Cryptolib. For information on version PL30, refer to SAP note 1493166.
- Install SAP Cryptolib using the steps mentioned in the Installing the SAP Cryptolib section in note 662340.

- Execute transaction SSO2 with RFC destination NONE (user must have the necessary authorization) to check whether SAP Cryptolib is active and the version used.
- SSL Configuration:
 - Execute the **RSPFAR** report to check the parameters. For more information, refer to SAP Notes 455033 and 510007.
 - Import both the public key and private key test certificates into the Development and Test Systems.
 - Import public key certificate and private key Production certificate into the Production Systems .
- Certificate Loading
 - Customers must follow the document Instructions in documents [loadingcertificates1.zip](#) and [loadingcertificates2.zip](#).
- Central Notes for Web service Security
 - 1319507 Overview: Analysis of ABAP Web Service Configuration
 - 1176559 Central note for WS Security on 7.01 20.12.2011
 - 1170238 Central note for WS Security on 7.10 20.12.2011
 - 1176558 Central note for WS Security on 7.00 17.10.2012
 - 1230253 Central note for WS Security on 7.11 20.12.2011
 - 1271237 Central note for WS Security on 7.00 SP14/1 02.02.2009
 - 1300924 Central note on WS Security (ABAP 7.00 and later) 27.02.2009
 - 1270684 Central note for WS Security on 7.00 SP14/2 02.02.2009
 - 1333974 Central note for WS Security on 7.20 30.05.2012
 - 1120273 Migration of 6.40 and 7.00 WS configurations to 7.20 24.07.2009

Procedure

Once you install the relevant SAP notes, you need to configure the endpoint in the **SOAMANAGER** transaction to be able to use the Web Service.

Before you use the **SOAMANAGER** transaction, ensure that the SOA Manager is a WebDynpro ABAP application. For this, ensure that the ICF node is active. Execute the SICF transaction to check the ICF node for SOA Manager is active. For more information, refer SAP Note 1124553.

Check the configurations in SICF and SSL (HTTPS) if you view the following screen.

Service cannot be reached

What has happened?

URL `https://usai1eac.wdf.sap.corp:44320/sap/bc/webdynpro/sap/appl_soap_management/~ucfLOADING` call was terminated because the corresponding service is not available.

Note

- The termination occurred in system EAC with error code **400** and for the reason **Session not found**.
- The selected virtual host was 0 .

What can I do?

- Please select a valid URL.
- If you do not yet have a user ID, contact your system administrator.

ErrorCode:ICF-NF-https-c:000-u:ANZEIGER-l:E-i:usai1eac_EAC_20-v:0-s:400-r:Sessionnotfound

HTTP 400 - Session not found
Your SAP Internet Communication Framework Team

If the customers do not have Single Sign-On activated, the SOA Manager will prompt for a user login.

The screen shot of a successful call to the transaction is shown below.

The screenshot shows a web browser window with the address bar displaying `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?`. The browser tabs include "SOA Management" and "New Tab". The application interface has a header bar with the title "SOA Management (EB5;000)" and links for "Help" and "Logoff". Below the header is a navigation menu with tabs: "Service Administration", "Technical Administration", "Logs and Traces", "Management Connections", "Services Registry", "Monitoring", and "Tools". The "Service Administration" tab is selected, showing a list of links and descriptions:

- [Web Service Configuration](#)
Configure Service Definitions, Consumer Proxies and Service Groups
- [Simplified Web Service Configuration](#)
Configure Service Definitions for Web Service Consumers with limited capabilities
- [Business Scenario Configuration](#)
Configure multiple Service Definitions and Service Groups supporting Change Management
- [Logon Data Management](#)
Maintain logon data used by Business Scenario Configuration
- [Pending Tasks](#)
Process Pending Tasks generated by Business Scenario Configuration
- [Logical Receiver Determination](#)
Maintain rules for finding Business Applications at runtime based on the business context

Manual Configuration of the Endpoint

Perform the following manual configurations to access the Fiscal Authority:

1. Search for the consumer proxy using the name **CO_WSPT***.

Web Service Configuration (EB5;000) [Help](#) [Back](#)

Search Design Time object for Web Service Configuration

Search Browse

Search By Service Definition, Consumer Proxy or ServiceGroup

Search by: **Consumer Proxy** Search Pattern: [Go](#) [Show Advanced Search](#)

Type in the search pattern for the object's name. You may use '*' for generic input. The search is done on the object's internal and external name simultaneously where applicable.

Search Results

Internal Name	External Namespace	External Name	Type	Description

[Apply Selection](#)

Web Service Configuration (EB5;000) [Help](#) [Back](#)

Search Design Time object for Web Service Configuration

Search Browse

Search By Service Definition, Consumer Proxy or ServiceGroup

Search by: **Consumer Proxy** Search Pattern: **co_wspt*** [Go](#) [Show Advanced Search](#)

Type in the search pattern for the object's name. You may use '*' for generic input. The search is done on the object's internal and external name simultaneously where applicable.

Search Results

Internal Name	External Namespace	External Name	Type	Description

[Apply Selection](#)

The system should display the following screen.

The screenshot shows a web browser window with the URL `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?` and a tab titled "SOA Management". The browser's address bar also shows "Snagit".

At the top of the application, a status bar indicates "1 entities found!". Below this is a header section titled "Web Service Configuration (EB5;000)" with "Help" and "Back" links.

The main content area is titled "Search Design Time object for Web Service Configuration" and contains two tabs: "Search" (active) and "Browse".

Under the "Search" tab, there is a section "Search By Service Definition, Consumer Proxy or ServiceGroup". It includes a "Search by:" dropdown menu set to "Consumer Proxy", a "Search Pattern:" input field containing "co_wspt*", a "Go" button, and a "Show Advanced Search" link.

Below the search section is a "Search Results" table with the following data:

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

- Under *Search Results*, select the relevant line and choose the *Apply Selection* pushbutton.

The screenshot shows the SAP SOA Management interface for Web Service Configuration (EB5;000). The browser address bar displays the URL: `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?`. The page title is "Web Service Configuration (EB5;000)".

The main section is titled "Search Design Time object for Web Service Configuration". It has two tabs: "Search" (selected) and "Browse".

Under the "Search" tab, there is a search bar with the text "Search By Service Definition, Consumer Proxy or ServiceGroup". The search criteria are set to "Search by: Consumer Proxy" and "Search Pattern: co_wspt*". A "Go" button and a "Show Advanced Search" link are also present.

The "Search Results" section displays a table with the following data:

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

Below the table is an "Apply Selection" button.

The "Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE" section is visible below the search results. It has three tabs: "Overview" (selected), "Configurations", and "Details".

Under the "Overview" tab, the "General Attributes" section lists the following information:

- Configuration Status: Logical Ports: 0
- External Namespace: https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/
- External Name: documentosTransporte
- Internal Name: CO_WSPT_DOCUMENTOS_TRANSPORTE
- SOAP Application: urn:sap-com:soap:application:esr:client:710
- Package Name: ID-SIGN-PT
- Software Component: SAP_APPL
- Application Component: FI-LOC

- On the *Configurations* tab, choose the *Create* pushbutton.

Browser address bar: https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management? SOA Management

Web Service Configuration (EB5;000)

Search Design Time object for Web Service Configuration

Search | Browse

Search By Service Definition, Consumer Proxy or ServiceGroup

Search by: Consumer Proxy Search Pattern: co_wspt* Go [Show Advanced Search](#)

Search Results

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

Apply Selection

Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE

Overview | **Configurations** | Details

Create Delete Edit Display Activate Deactivate Ping Web Service

Logical Port	State	Default Port	Description	Creation Type
Create				

The system displays the following screen.

The screenshot shows the 'SOA Management' window with the following sections:

- General Configuration Settings:**
 - Logical Port Name: * (text input)
 - Description: * (text input)
 - Configuration Type:
 - ☒ WSDL Based Configuration
 - ☐ Manual Configuration
 - ☐ Process Integration Runtime
 - ☐ Local shortcut configuration
 - Logical Port is Default: ☐
- WSDL Access Settings:**
 - WSDL Base:
 - ☒ Via HTTP Access
 - ☐ Via File
- WSDL Location:**
 - URL for WSDL Access: * (text input)
 - WSDL Access User: (text input)
 - WSDL Access User Password: (text input)
 - [Show/Hide Proxy Settings](#)


Buttons at the bottom: [Apply Settings](#), [Cancel](#)

4. Depending on the version of SAP Basis you have, you might see different screens in SOAMANAGER transaction and also, you might not have the feature for choosing SSL X509v3 authentication in manual configuration.

You have two options here, either use the supplied WSDL file that was built with a security header to allow SSL X509v3 manual configuration, or you install [Note 1669829 - Unable to generate LP with X.509 client cert. w/o WSDL](#). This note can be applied by snote in the following releases,


VALID FOR			
Software Component	SAP_BASIS		SAP Basis compo...
Release 700	SAPKB70022 -	SAPKB70026	
Release 710	SAPKB71012 -	SAPKB71014	
Release 711	SAPKB71107 -	SAPKB71109	
Release 701	SAPKB70110 -	SAPKB70111	
Release 730	SAPKB73003 -	SAPKB73006	
Release 720	SAPKB72006 -	SAPKB72006	
Release 731	SAPKB73101 -	SAPKB73102	

5. If you don't have SSL X509v3 Authentication option in manual configuration proceed as indicated below:
- In the *General Configuration Settings* group box, enter the logical port name, description, and the configuration type *WSDL Based Configuration*. In *File with WSDL Document* select the file *documentosTransporte_notaSAP.wsdl* available on the note that you previously saved on your local computer.
 - Choose *Apply Settings*.

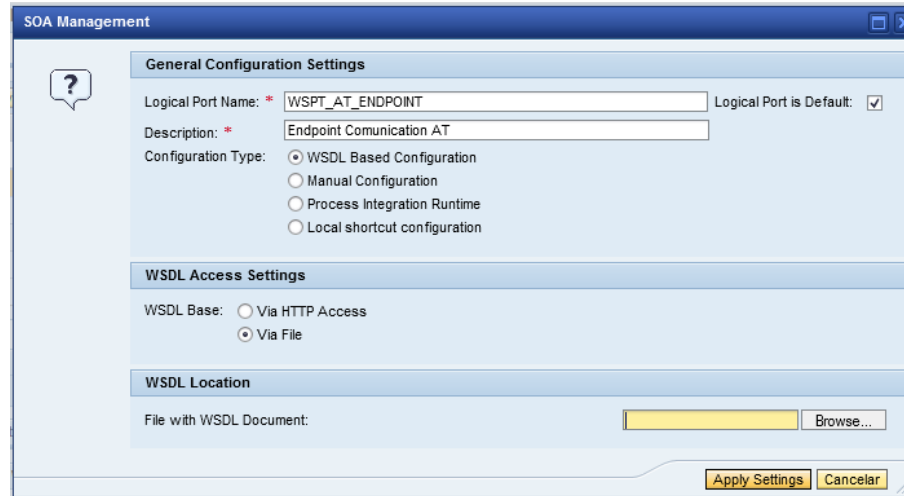

The image shows the 'SOA Management' window with the 'General Configuration Settings' tab selected. The 'Logical Port Name' is 'WSPT_AT_ENDPOINT' and 'Logical Port is Default' is checked. The 'Description' is 'Endpoint Communication AT'. The 'Configuration Type' is 'WSDL Based Configuration'. The 'WSDL Access Settings' section shows 'Via File' selected. The 'WSDL Location' section has a text box for 'File with WSDL Document' and a 'Browse...' button. At the bottom are 'Apply Settings' and 'Cancel' buttons.

- On the *Consumer Security* tab, enter WSPTAT in *SSL Client PSE of transaction STRUST*.
- Go to step 8 in file **Guidelines_for_endpoint_config2.doc**.

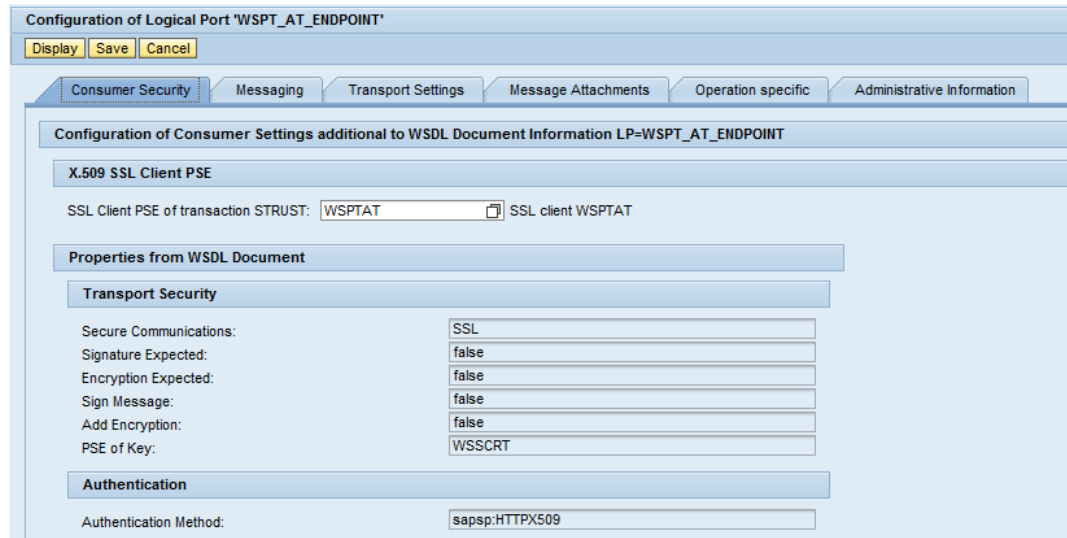

The image shows the 'Configuration of Logical Port 'WSPT_AT_ENDPOINT'' window with the 'Consumer Security' tab selected. The 'SSL Client PSE of transaction STRUST' is 'WSPTAT'. The 'Properties from WSDL Document' section shows 'Transport Security' with 'Secure Communications' set to 'SSL', 'Signature Expected' set to 'false', 'Encryption Expected' set to 'false', 'Sign Message' set to 'false', 'Add Encryption' set to 'false', and 'PSE of Key' set to 'WSSCRT'. The 'Authentication' section shows 'Authentication Method' set to 'sapsp:HTTPX509'.