

Guidelines to endpoint creation for the Web Service used in “Comunicação AT – Documentos de Transporte” – Part 2


Continuation from Part 1 File

7. If you are on SP level grater then the version indicated bellow, you can do a manual configurations as indicated in the following:

Release 700	SAPKB70026
Release 710	SAPKB71014
Release 711	SAPKB71109
Release 701	SAPKB70111
Release 730	SAPKB73006
Release 720	SAPKB72006
Release 731	SAPKB73102

PS: Always verify the release information in note **Note 1669829 - Unable to generate LP with X.509 client cert. w/o WSDL.**

- In the *General Configuration Settings* group box, enter the logical port name, description, and the configuration type. Be sure to mark the Logical Port as Default!
- Choose *Apply Settings*.

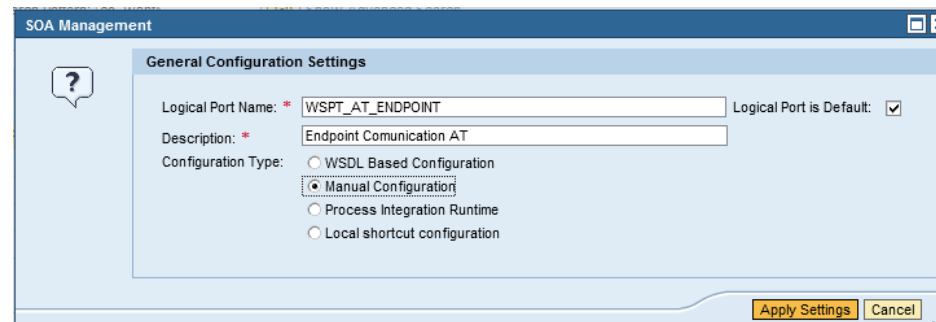

The screenshot shows a window titled "SOA Management" with a sub-tab "General Configuration Settings". On the left, there is a help icon (a question mark in a speech bubble). The main area contains the following fields and options:

- Logical Port Name:** * WSPT_AT_ENDPOINT
- Description:** * Endpoint Communication AT
- Configuration Type:**
 - ☐ WSDL Based Configuration
 - ☒ Manual Configuration
 - ☐ Process Integration Runtime
 - ☐ Local shortcut configuration
- Logical Port is Default:** ☒

At the bottom right, there are two buttons: "Apply Settings" and "Cancel".

- c. On the *Consumer Security* tab, choose *X.509 SSL Client Certificate* under *Authentication Settings*.

Configuration of Logical Port 'WSPT_AT_ENDOINT_V2'

Display Save Cancel

Consumer Security Messaging Transport Settings Message Attachments Operation specific Administrative Information

Configuration of Consumer Settings without WSDL Document. LP=WSPT_AT_ENDOINT_V2

Authentication Settings

☐ No Authentication
☐ User ID / Password
☐ SAP Authentication Assertion Ticket
☒ X.509 SSL Client Certificate

X.509 SSL Client PSE

SSL Client PSE of transaction STRUST:

- d. Enter *WSPTAT* in the *SSL Client PSE of transaction STRUST* field.

Configuration of Logical Port 'WSPT_AT_ENDOINT_V2'

Display Save Cancel

Consumer Security Messaging Transport Settings Message Attachments Operation specific Administrative Information

Configuration of Consumer Settings without WSDL Document. LP=WSPT_AT_ENDOINT_V2

Authentication Settings

☐ No Authentication
☐ User ID / Password
☐ SAP Authentication Assertion Ticket
☒ X.509 SSL Client Certificate

X.509 SSL Client PSE

SSL Client PSE of transaction STRUST:

8. On the *Messaging* tab, maintain the settings as mentioned in the screenshot below

The screenshot displays the SAP SOA Management web application. The browser address bar shows the URL: `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?`. The page title is "SOA Management".

Search Results

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

Buttons: Apply Selection

Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE

Overview | **Configurations** | Details

Buttons: Create, Delete, Edit, Display, Activate, Deactivate, Ping Web Service

Logical Port	State	Default Port	Description	Creation Type

Configuration of Logical Port 'WSPT_AT_ENDPOINT'

Buttons: Display, Save, Cancel

Consumer Security | **Messaging** | Transport Settings | Message Attachments | Operation specific | Administrative Information

Reliable Messaging (Asynchr.)

RM Protocol: WS-RM 2005/02

Message ID (Synchronous)

Message ID Protocol: Suppress ID Transfer

Metering of Service Calls

Data transfer scope: Enhanced Data Transfer

Transfer protocol: Transfer via SOAP header

9. On the *Transport Settings* tab, enter the proxy host, port, and other necessary credentials to access the Web Service. If the ERP system is directly connected to the internet, then you just need to fill the URL access path, computer name of access URL, and URL protocol information.

10. Make other configurations as shown in the screenshot below. For Test systems Port Number is 701 for Production is 401.

Web Service Configuration (EB5;000)

Search Design Time object for Web Service Configuration

Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE

Configuration of Logical Port 'WSPT_AT_ENDPOINT'

Edit Save Cancel

Consumer Security Messaging **Transport Settings** Message Attachments Operation specific Administrative Information

Transport Binding

URL Access Path: /sgdtws/documentosTransporte

Computer Name of Access URL: servicos.portaldasfinancas.gov.pt

Port Number of Access URL: 701

URL Protocol Information: HTTPS

Logon Language: Language of User Context

Name of Proxy Host:

Port Number of Proxy Host:

User Name for Proxy Access:

Password of Proxy User:

Make Local Call: No Call in Local System

Transport Binding Type: SOAP 1.1

Maximum Wait for WS Consumer: 0

Optimized XML Transfer: None

Compress HTTP Message: Inactive

Compress Response: True

Attention: in URL Access Path you have remove the last slash character after configuration by the WSDL file. Like is shown on the picture above.

With the following fields you can achieve an optimal configuration, due to the service implementation in Fiscal Authority, you can only use the highlighted Values:

- Transport Binding Type **SOAP 1.1** or SOAP 1.2
- Optimized XML Transfer MTOM or **None** or BinaryXML
- Compress HTTP Message **Inactive** or Active

11. There is no need to change the message attachments. On the *Message Attachments* tab, enter **No** in the *Process Attachments* field.

The screenshot displays the SAP SOA Management web interface. The browser address bar shows the URL: `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?`. The page title is "SOA Management".

Search Section:

Search By Service Definition, Consumer Proxy or ServiceGroup

Search by: Consumer Proxy Search Pattern: Go [Show Advanced Search](#)

Search Results:

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

Apply Selection

Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE

Overview **Configurations** Details

Create Delete Edit Display Activate Deactivate Ping Web Service

Logical Port	State	Default Port	Description	Creation Type
WSPT_AT_ENDPOINT				

Configuration of Logical Port 'WSPT_AT_ENDPOINT'

Display Save Cancel

Consumer Security **Messaging** Transport Settings **Message Attachments** Operation specific Administrative Information

Message Attachment Handling

Process Attachments: No

12. On the *Operation specific* tab, enter **<https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/>** in the *SOAP Action* field. Only mark the checkbox if the SOAP Action field is not erased by it. Otherwise, leave the checkbox empty.

The screenshot displays the SAP SOA Management web interface. The browser address bar shows the URL: `https://uxcieb5.wdf.sap.corp:44378/sap/bc/webdynpro/sap/appl_soap_management?`. The page title is "SOA Management".

The main content area is titled "Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE". It features three tabs: "Overview", "Configurations", and "Details". The "Configurations" tab is active, showing a table with columns: "Logical Port", "State", "Default Port", "Description", and "Creation Type". Above the table are buttons: "Create", "Delete", "Edit", "Display", "Activate", "Deactivate", and "Ping Web Service".

Below the table is the "Configuration of Logical Port 'WSPT_AT_ENDPOINT'" section. It includes buttons "Display", "Save", and "Cancel". The "Operation specific" tab is selected, showing a list of operations on the left and configuration fields on the right.

The "Operation" list on the left includes "envioDocumentoTransporte". The configuration fields on the right are:

- Transport Binding:** SOAP Action: `https://servicos.portaldasfinancas.g` (checkbox checked)
- WS Addressing:** Inbound Message Action: (checkbox unchecked)
- Transport Security:** Signed Message Elements: (empty field), Encrypted Message Elements: (empty field), Signed Message Elements: (empty field), Encrypted Message Elements: (empty field)

Search By Service Definition, Consumer Proxy or ServiceGroup

Search by: Consumer Proxy Search Pattern: co_wspt* Go [Show Advanced Search](#)

Search Results

Internal Name	External Namespace	External Name	Type	Description
CO_WSPT_DOCUMENTOS_TRANSPORTE	https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/	documentosTransporte	Consumer Proxy	

Apply Selection

Details of Consumer Proxy: CO_WSPT_DOCUMENTOS_TRANSPORTE

Overview Configurations Details

General Attributes

Configuration Status: Logical Ports: 1
External Namespace: https://servicos.portaldasfinancas.gov.pt/sgdtws/documentosTransporte/
External Name: documentosTransporte
Internal Name: CO_WSPT_DOCUMENTOS_TRANSPORTE
SOAP Application: urn:sap-com:soap:application:esr:client:710
Package Name: ID-SIGN-PT
Software Component: SAP_APPL
Application Component: FI-LOC

Configuration of Logical Port 'WSPT_AT_ENDPOINT'

Edit Save Cancel

Consumer Security Messaging Transport Settings Message Attachments Operation specific Administrative Information

Configuration of Consumer Settings without WSDL Document. LP=WSPT_AT_ENDPOINT

Authentication Settings	X.509 SSL Client PSE
☐ No Authentication ☐ User ID / Password ☐ SAP Authentication Assertion Ticket ☒ X.509 SSL Client Certificate	SSL Client PSE of transaction STRUST: DEFAULT

The configuration is now complete.

For trace and LOG you can either use SRT_UTIL transaction or the trace functionality in SOAMANAGER. For the later proceed as indicated below:

SOA Management (EB5;000)

Service Administration

Technical Administration

Logs and Traces

Management Connections

Services Registry

Monitoring

Tools

[Web Service Configuration Log](#)
Web Service Configuration Log Viewer

[SOA Runtime Log/Trace Viewer](#)
Display log and trace records of SOA runtime

[SOA Runtime Logs Configuration](#)
Configure SOA runtime logs

[SOA Runtime Trace Configuration](#)
Configure SOA runtime traces

[SOA Runtime Trace Patterns](#)
SOA runtime trace patterns

[SOA Configuration Trace: Administration and Viewer](#)
Analyze and administer the SOA configuration trace

Press Add New Button,

Trace Configuration

Tracing

Expiration Time	User Name	Interface	Trace Level	Accept Trace	Export Trace	Trace Pattern
2999-12-31 13:00:00			Errors	☒	☒	

Reset to default tracing

Switch tracing off

Refresh table

Add new

Edit

Delete

After you can define the duration of the trace in seconds, and in order to reduce overhead in SMICM choose a value that can allow you to test.
Example 10h = 36000s.

You should refine the trace either by adding the interface name CO_WSPT_DOCUMENTOS_TRANSPORTE or choose a Username.

Expiration Time (seconds):

300

User Name:

Interface:

Trace Pattern:

Trace Level:

Payload Trace

Accept Trace:

☒

Export Trace:

☒

Add new

Cancel