



Home > Products > Motor power-Brushless Motor > 1/2 HP Brushless DC Motor



200W 48V Brushless DC Motor

Model Number:	BLDC0.26-76
Type:	Brushless DC Motor
Output Power:	0.26HP
DC Voltage:	48V
Speed Range:	850rpm
Poles:	4P, 6P, 8P...





Detailed information	
----------------------	--

Brand Name:	Volcano Electric	Model Number:	BLDC0.26-76	Type:	Brushless DC Motor
Output Power:	0.26HP (200W)	DC Voltage:	48V	Speed Range:	850 RPM
Controller:	Customized, Optional	Braker:	Optional	Insulation Class:	Class B/F/H
Enclosure:	IP44 / IP54	Poles:	4P, 6P, 8P...	Wire:	100% copper
Housing:	Aluminum	Efficiency:	IE 4.0		
Duty:	S1 (continuous)	Place of Origin:	Zhejiang, China (Mainland)	Standard:	IEC standard or NEMA standard
Application:	Boat, Car, Electric Bicycle, Fan, Home Appliance, Traction Motor, Solar Pump DC systems, bus A/C systems ,Other				

Product Description

The 48V brushless dc motor also belong to the low voltage motor, we could not only provide the low voltage motor, but also different volt according to your application and demand. Also we make the drive by our company.

Configuration

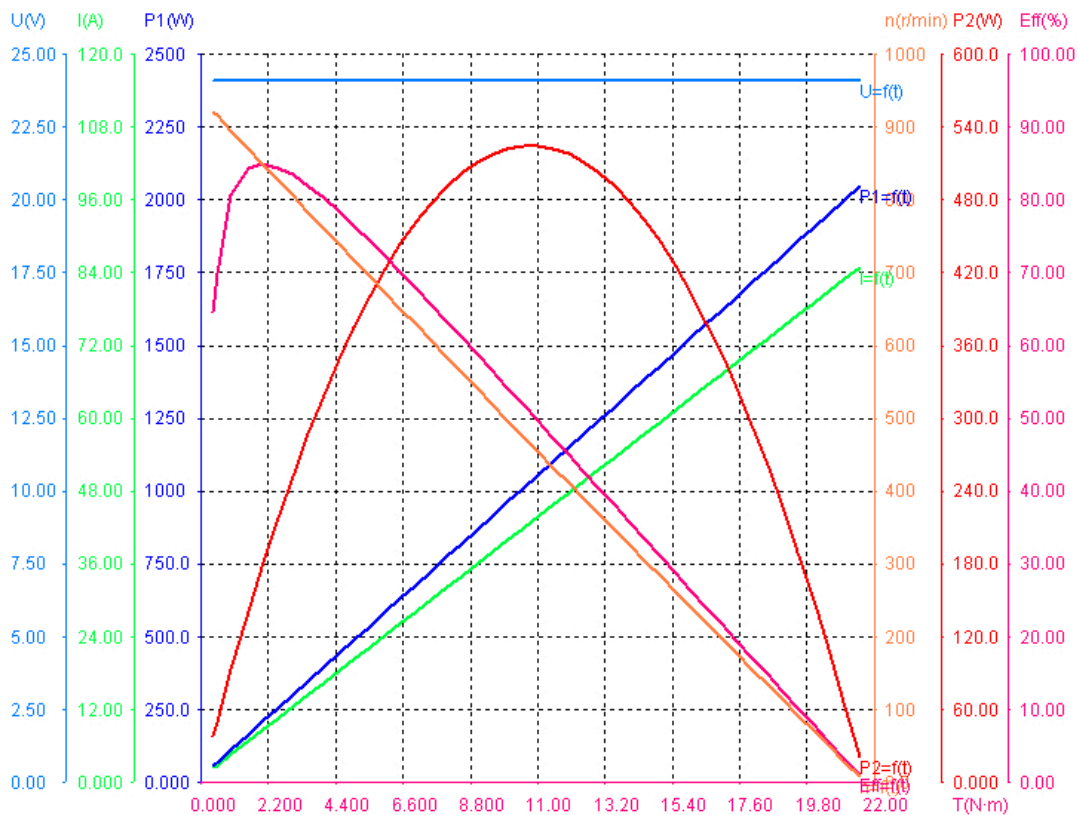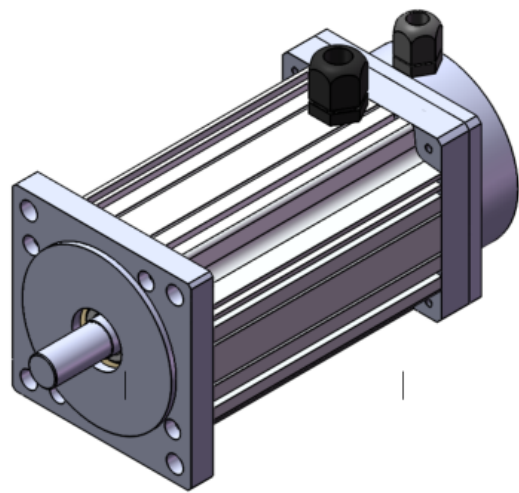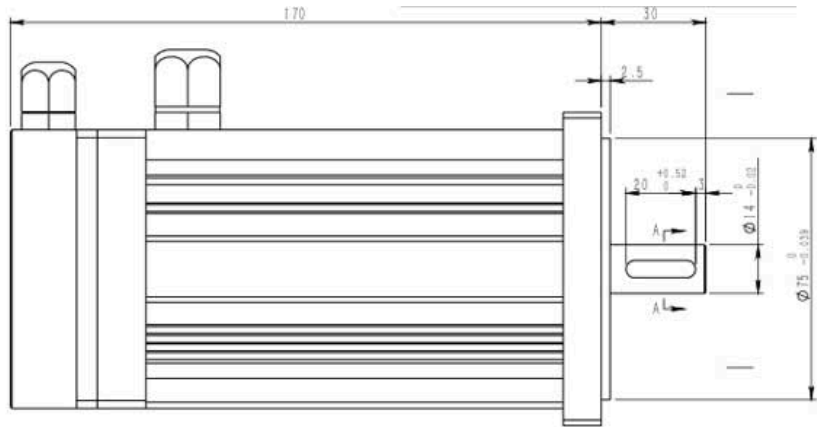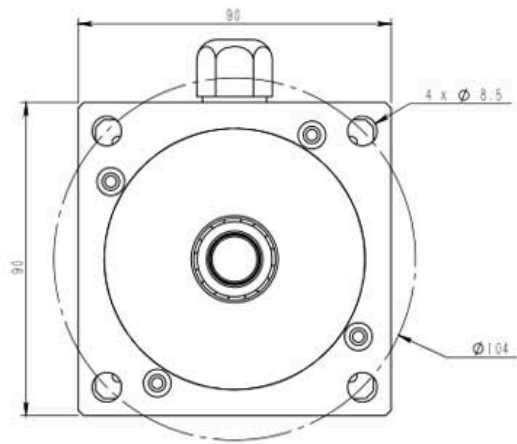

*CAN MAKE ACCORDING TO YOUR REQUIRMENT

Model	Power Kw	Voltage V	Current A	Speed RPM	Nominal torque N.m	Productive needs %	Noise dB
BLDC0.26-76	0.2	48V	4.9	850	2.24	85	60
BLDC0.3-76	0.24	24V	11.8	1600	1.43	84	60
BLDC0.3-76	0.24	48V	5.9	2000	1.15	85	60
BLDC0.4-76	0.3	36V	9.8	2000	1.43	85	60
BLDC0.4-76	0.3	48V	7	2000	1.43	85	60
BLDC0.47-76	0.35	24V	7.4	1950	1.71	85	60
BLDC0.5-90	0.37	24V	18.1	3500	1	85	60
BLDC0.5-90	0.37	24V	18.1	1600	2.23	85	60
BLDC0.55-90	0.37	250V	1.7	1200	2.94	85	60
BLDC0.6-90	0.45	300V	1.8	1500	1.27	84	80
BLDC0.65-90	0.48	48V	11.8	3650	1.26	85	61
BLDC0.75-90	0.56	36V	18.3	2000	2.67	84.5	61.5
BLDC0.8-90	0.62	72V	10.1	1550	3.82	84.7	61.5
BLDC0.9-90	0.68	48V	16.7	1650	3.93	92.5	61

Advantage of Brushless DC motor:

- lower maintenance as they have no brushes to wear out
- higher starting torque due to rare earth magnets
- higher efficiency(over 90%)on sub fractional motors
- more compact design
- better heat disipation
- lower noise

For customized DC Motors, please contact our technician, Ordinary, we have to know the following information to get a professional proposal:

- **Brushed or Brushless** Customer preference
- **Output power (W)** Horsepower/watts/torque rated at full load speed
- **Voltage (V)** i.e 12v DC 220v AC
- **Motor speed (RPM)** Revolutions per minute of the shaft at full load Voltage
- **Application** e.g. traction, airconditioning, etc.
- **Duty** Most motors are rated continuous. Some applications however may use motors designed for intermittent duty
- **Configuration/Frame** Our products are according to IEC standard, we also can customize the flange and shaft according to the customer drawing
- **Controller function** e.g. forward/reverse, variable speed, acceleration profile, etc.

Previous 48V Low RPM Brushless DC Motor

Next 240W 2000RPM Brushless DC Motor

You may like:

				
Hall Sensor BLDC Motor 370W 12V For EV Application	24v 500w Higher Efficiency Hallsensor Bldc Motor	76V 400W 2000RPM IP54 BLDC Motor	12V 1000W 1500RPM BLDC Motor With Hall Sensor	Sensored 12v 0.5hp 3000rpm Bldc Motor
				
12v 600w 1800rpm Brushless Dc Motor With Hall Sensors	Customized 700W 24V Brushless DC Motor	1500RPM 400W 12V High torque Brushless DC Motor	600W 1800RPM 48V DC Brushless Motor	
				
		150W Brushless DC Motor In Textile Machinery		