Tel: +86-18157453060 | Email: info@volcanomotor.com

one-stop partner for motors & motor drives designing and manufacturing



Home About Us Products Solutions News FAQ Contact Us Feedback

Home > Products > Motor power-Brushless Motor > 1/2 HP Brushless DC Motor



300V Industrial Brushless DC Motor

Model Number:	BLDC0.6-90
Type:	Brushless DC Motor
Output Power:	0.6HP
DC Voltage:	300V
Speed Range:	1500rpm
Poles:	4P, 6P, 8P


Detailed information


Brand Name:	Volcano Electric	Model Number:	BLDC0.6-90	Туре:	Brushless DC Motor
Output Power:	0.6 HP (450W)	DC Voltage:	300V	Speed Range:	1500 RPM
Controller:	Customized, Optional	Braker:	Optional	Insulation Class:	Class B/F/H
Enclosure:	IP44/IP54	Poles:	4P, 6P, 8P	Wire:	100% copper
Housing:	Aluminum	Efficiency:	IE 4.0		
Duty:	S1 (continuous)	Place of Origin:	Zhejiang, China (Mainland)	Standard:	IEC standard or NEMA standard
Application:	Boat, Car, Electric Bicycle, Fa	an, Home Appliance	, Traction Motor, Solar Pump	DC systems, bus A/0	C systems ,Other

Product Description


Brushless DC Motor is used in a wide variety of industrial and commercial applications by many OEM's. In other word, it's industrial brushless dc motor. A Brushless DC Motor is chosen for a number of reasons such as portability, high starting torque, bi-directionality, high reliability and for having the ability to fine tune the speed to match your requirements.

Configuration







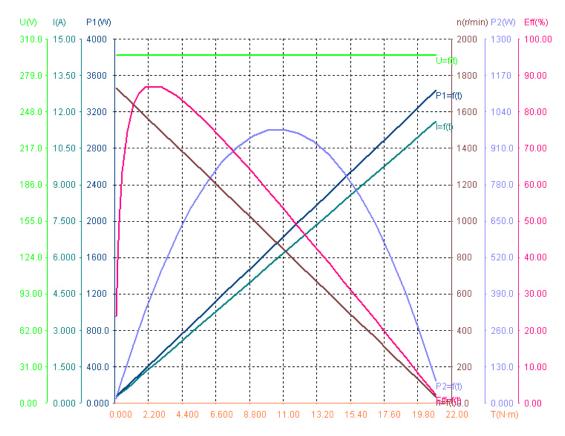

Model	Power Kw	Voltage V	Current A	Speed RPM	Nominal torque N.m	Productive needs %	Noise dB
BLDC0.26-76	0.2	48V	4.9	850	2.24	85	60
BLDC0.3-76	0.24	24V	11.8	1600	1.43	84	60

0.24	48V	5.9	2000	1.15	85	60
0.3	36V	9.8	2000	1.43	85	60
0.3	48V	7	2000	1.43	85	60
0.35	24V	7.4	1950	1.71	85	60
0.37	24V	18.1	3500	1	85	60
0.37	24V	18.1	1600	2.23	85	60
0.37	250V	1.7	1200	2.94	85	60
0.45	300V	1.8	1500	1.27	84	80
0.48	48V	11.8	3650	1.26	85	61
0.56	36V	18.3	2000	2.67	84.5	61.5
0.62	72V	10.1	1550	3.82	84.7	61.5
0.68	48V	16.7	1650	3.93	92.5	61
	0.3 0.3 0.35 0.37 0.37 0.37 0.45 0.48 0.56 0.62	0.3 36V 0.3 48V 0.35 24V 0.37 24V 0.37 250V 0.45 300V 0.48 48V 0.56 36V 0.62 72V	0.3 36V 9.8 0.3 48V 7 0.35 24V 7.4 0.37 24V 18.1 0.37 250V 1.7 0.45 300V 1.8 0.48 48V 11.8 0.56 36V 18.3 0.62 72V 10.1	0.3 36V 9.8 2000 0.3 48V 7 2000 0.35 24V 7.4 1950 0.37 24V 18.1 3500 0.37 24V 18.1 1600 0.37 250V 1.7 1200 0.45 300V 1.8 1500 0.48 48V 11.8 3650 0.56 36V 18.3 2000 0.62 72V 10.1 1550	0.3 36V 9.8 2000 1.43 0.3 48V 7 2000 1.43 0.35 24V 7.4 1950 1.71 0.37 24V 18.1 3500 1 0.37 24V 18.1 1600 2.23 0.37 250V 1.7 1200 2.94 0.45 300V 1.8 1500 1.27 0.48 48V 11.8 3650 1.26 0.56 36V 18.3 2000 2.67 0.62 72V 10.1 1550 3.82	0.3 36V 9.8 2000 1.43 85 0.3 48V 7 2000 1.43 85 0.35 24V 7.4 1950 1.71 85 0.37 24V 18.1 3500 1 85 0.37 24V 18.1 1600 2.23 85 0.37 250V 1.7 1200 2.94 85 0.45 300V 1.8 1500 1.27 84 0.48 48V 11.8 3650 1.26 85 0.56 36V 18.3 2000 2.67 84.5 0.62 72V 10.1 1550 3.82 84.7

*CAN MAKE ACCORDING TO YOUR REQUIRMENT

Advantages of Brushless DC motor:

- lower maintenance as they have no brushes to wear out
- higher starting torque due to rare earth magnets
- higher efficiency(over 90%)on sub fractional motors
- more compact design
- better heat disipation
- lower noise

For customized DC Motors, please contact our technician, Ordinary, we have to know the following information to get a professional proposal:

- Brushed or Brushless Customer preference
- Output power (W) Horsepower/watts/torque rated at full load speed
- Voltage (V) i.e 12v DC 220v AC
- Motor speed (RPM) Revolutions per minute of the shaft at full load Voltage
- Application e.g. traction, airconditioning, etc.
- Duty Most motors are rated continuous. Some applications however may use motors designed for intermittent duty
- Configuration/Frame Our products are according to IEC standard, we also can customize the flange and shaft according to the customer drawing
- **Controller function** e.g. forward/reverse, variable speed, acceleration profile, etc.

Previous 48 volt 2000rpm Brushless DC Motor

Next 48V 500W Brushless DC Motor

You may like:




Hall Sensor BLDC Motor 370W 12V For EV Application



24v 500w Higher Efficiency Hallsensor Bldc Motor



76V 400W 2000RPM IP54 BLDC Motor



12V 1000W 1500RPM BLDC Motor With Hall Sensor



Sensored 12v 0.5hp 3000rpm Bldc Motor



12v 600w 1800rpm Brushless Dc Motor With Hall Sensors



Customized 700W 24V Brushless DC Motor



1500RPM 400W 12V High torque Brushless DC Motor



600W 1800RPM 48V DC Brushless Motor



150W Brushless DC Motor In Textile Machinery

DC Motor Manufacturer & Supplier in China Email: info@volcanomotor.com | Tel: 86-18157453060

About Us

Products

Solutions

Contact Us

Feedback

Search

Copyright © Ningbo volcanic electric co.,LTD