WAVLINK
see the world


QUICK START GUIDE

USB-C Quad Display Docking

kb.wavlink.xy-z/docs/WL-UMD304-Pro/v100/
Connect to the Link to View the Detailed User Guide

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

OVERVIEW

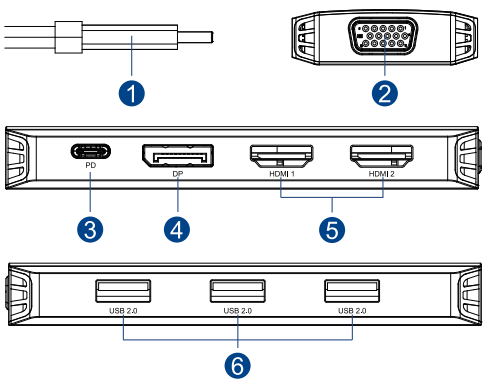


1. Upstream Type-C Port
2. VGA
3. USB-C PD IN
4. DisplayPort
5. HDMI
6. USB-A

EN WL-UMD304 Pro

HOW TO USE

1. Connect the USB-C Connector of the docking station to your laptop or phone.
2. This docking station supports quad display. Connect the DP/HDMI/VGA ports to the TV, projector, or other DP/HDMI/VGA-based monitors.
3. Connect USB-A ports to USB peripherals according to your needs.
4. If you want to charge your laptop or phone, please connect the USB-C Port (PD IN 100W) to the power source.

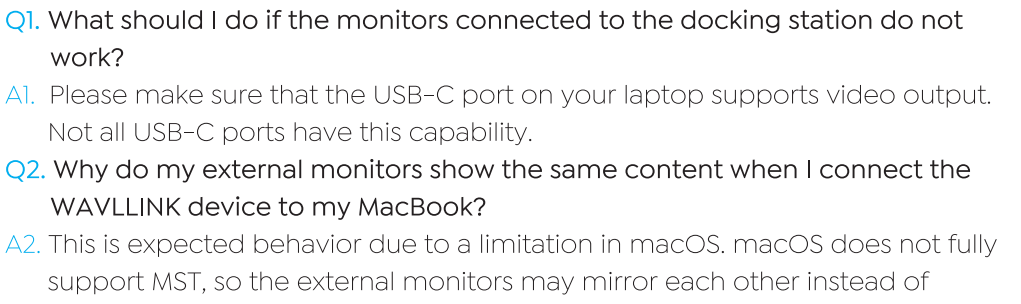

DISPLAY RESOLUTION

Single Display

Items	Windows (Extend)			Mac OS (Mirror)		
	DP1.4&DSC1.2	DP1.4	DP1.2	DP1.4&DSC1.2	DP1.4	DP1.2
DP	4K@144Hz	4K@60Hz	4K@60Hz	4K@144Hz	4K@60Hz	4K@60Hz
HDMI1	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz
HDMI2	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz	4K@60Hz
VGA	1080P@60Hz	1080P@60Hz	1080P@60Hz	1080P@60Hz	1080P@60Hz	1080P@60Hz

Dual Display

Items	Windows (Extend)			Mac OS (Mirror)		
	DP1.4&DSC1.2	DP1.4	DP1.2	DP1.4&DSC1.2	DP1.4	DP1.2
DP+ HDMI1/2	2*4K@60Hz	2*4K@60Hz	2*4K@30Hz	2*4K@60Hz	2*4K@60Hz	2*4K@60Hz
HDMI1+ HDMI2	2*4K@60Hz	2*4K@60Hz	2*4K@30Hz	2*4K@60Hz	2*4K@60Hz	2*4K@60Hz
HDMI1/ 2+VGA	4K@60Hz+ 1080P@60Hz	4K@60Hz+ 1080P@60Hz	4K@30Hz+ 1080P@60Hz	2* 1080P@60Hz	2* 1080P@60Hz	2* 1080P@60Hz
DP+VGA	4K@60Hz+ 1080P@60Hz	4K@60Hz+ 1080P@60Hz	4K@30Hz+ 1080P@60Hz	2* 1080P@60Hz	2* 1080P@60Hz	2* 1080P@60Hz


Triple Display

Items	Windows (Extend)			Mac OS (Mirror)		
	DP1.4&DSC1.2	DP1.4	DP1.2	DP1.4&DSC1.2	DP1.4	DP1.2
DP +HDMI1 +HDMI2	4K@30Hz +2*4K@60Hz	4K@30Hz +4K@60Hz +4K@30Hz	3* 1080P@60Hz	3*4K@60Hz	3*4K@60Hz	3*4K@60Hz
HDMI1+ HDMI2+ VGA	2*4K@60Hz +1080P@60Hz	2*4K@30Hz+ 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz
HDMI1/2+ DP+VGA	2*4K@60Hz +1080P@60Hz	2*4K@30Hz+ 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz	3* 1080P@60Hz

Quad Display

Items	Windows (Extend)			Mac OS (Mirror)		
	DP1.4&DSC1.2	DP1.4	DP1.2	DP1.4&DSC1.2	DP1.4	DP1.2
DP+ HDMI1+ HDMI2+ VGA	4K@60Hz+ 4K@30Hz+ 4K@30Hz+ 1080P@60Hz	4K@30Hz+ 4K@30Hz+ 4K@30Hz+ 1080P@60Hz	Not Support	4* 1080P@60Hz	4* 1080P@60Hz	4* 1080P@60Hz

Note:
- 4K refers to 3840x2160.
- For some Windows laptops, when connecting four external monitors simultaneously, it is necessary to disable the laptop's screen to activate all external monitors.
- Mac OS supports single-stream transport, so only one video source can be output, such as ABBBB (A is the primary display).

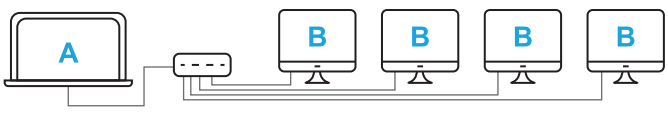

Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

FAQ

Q1. What should I do if the monitors connected to the docking station do not work?
A1. Please make sure that the USB-C port on your laptop supports video output. Not all USB-C ports have this capability.
Q2. Why do my external monitors show the same content when I connect the WAVLLINK device to my MacBook?
A2. This is expected behavior due to a limitation in macOS. macOS does not fully support MST, so the external monitors may mirror each other instead of extending independently.
Q3. Why isn't my laptop charging when I connect the power adapter to the hub?
A3. Please make sure that the USB-C port on your laptop supports charging. Not all USB-C ports support this function.
Q4. When I connect three monitors to the docking station, one monitor does not turn on. What should I do?
A4. Please make sure that your GPU supports 4 displays (including the built-in laptop screen), as not all GPUs can support 4 displays simultaneously. If your GPU supports a maximum of 3 displays, try closing the laptop lid to enable all three external monitors.
If you encounter any issues, feel free to contact our support team.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am -5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am -5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 6:00 pm (UTC-5)