
SIERRA DIGITAL AUDIO

Software for musicians · sierradigitalaudio.com

Integra7Control Workbench

Tone browser, Studio Set editor and mixer for the Roland INTEGRA-7

For Windows · and for Mac (Apple Silicon)

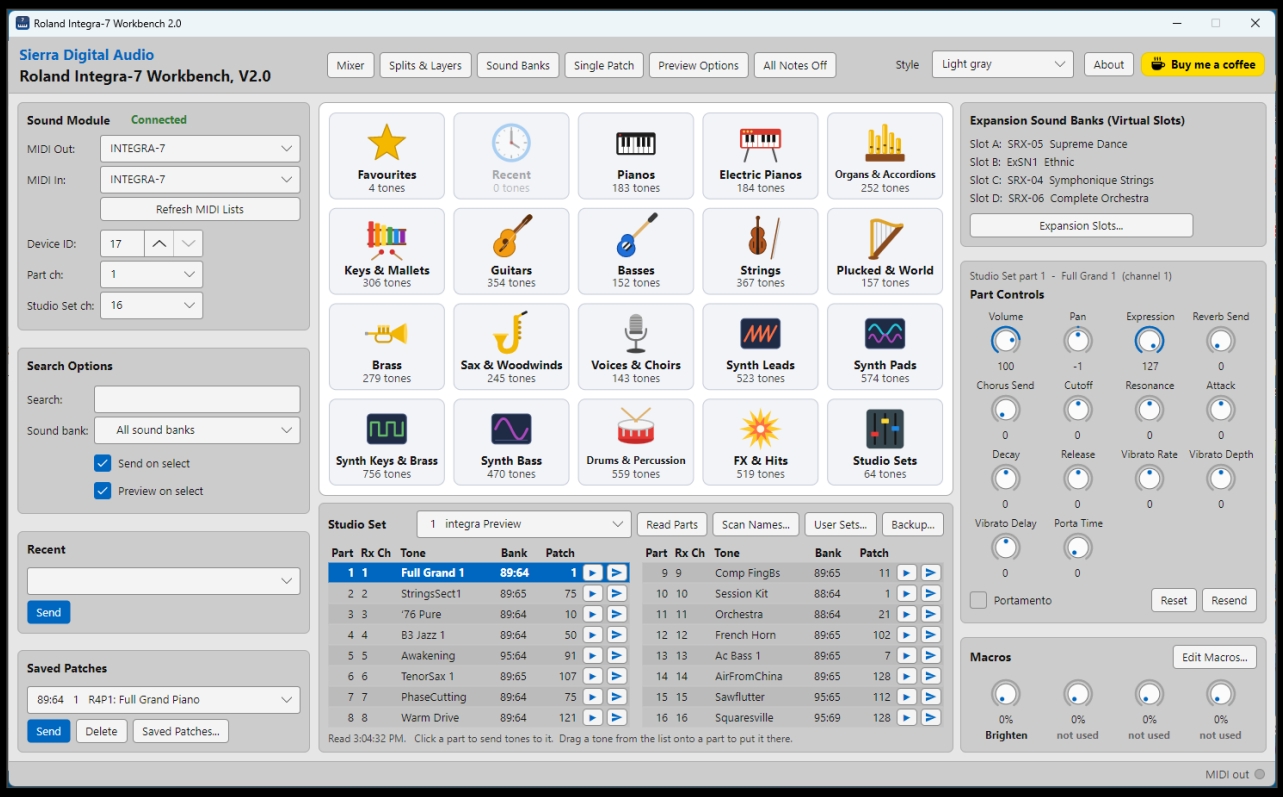

User Guide · Version 2.0.0

Windows 10/11 (64-bit) · Mac: Apple Silicon (M1 or later), macOS 12 or later; not for Intel Macs

Roland and INTEGRA-7 are trademarks of Roland Corporation. The Workbench is not affiliated with or endorsed by Roland.

Introduction

System requirements. Windows: Windows 10 or 11, 64-bit. Mac: a Mac with Apple Silicon (M1 or later) and macOS 12 Monterey or later. The Mac version does not run on Intel-based Macs.

The **Integra7Control Workbench** is a free program for the Roland INTEGRA-7 sound module. Instead of scrolling through more than 6,000 tones on the INTEGRA-7's small display, you pick an instrument family from a grid of colourful tiles, click a tone, and the Workbench sends it to the INTEGRA-7 part you choose. Click the ▶ button next to a tone to hear it straight away.

The Workbench also shows and edits the INTEGRA-7's **Studio Sets**: the 16 parts of the current Studio Set, a 16-part **Mixer** with level, pan, reverb and chorus sends, mute, solo and outputs, each part's settings and EQ, the Studio Set's reverb, chorus and Master EQ, and its **Splits & Layers**. Everything is read from the INTEGRA-7, so what you see is what the INTEGRA-7 is really doing.

What you need

- Windows 10 or 11, 64-bit, or a Mac with Apple Silicon (M1 or later) running macOS 12 or later. Nothing else needs to be installed: everything the Workbench needs comes with it.
- A Roland INTEGRA-7 connected by USB with Roland's INTEGRA-7 driver (Section 5), or by a MIDI interface. The Workbench needs both the INTEGRA-7's **MIDI Out** and **MIDI In**: it sends tones on MIDI Out, and reads the Studio Set and the parts back on MIDI In.

What's new in version 2.0

Version 2.0 is a new Workbench, rebuilt from the ground up so that one program runs on Windows and on the Mac, with the look of the Integra7Control VST.

- **Mac version:** the Workbench now runs on Apple Silicon Macs too (4.2).
- **New look:** four styles to choose from, the same as the VST's (7.21).
- **Instrument tiles** from the VST, with **Favourites** and **Recent**, as well as search and the sound bank filter (7.3).
- **Play and Send on every tone and every Studio Set part**, with Preview Options for how a tone is played: a short phrase, a scale, a piano or drum loop, or your own MIDI file (7.8).
- **Part Controls and Macros** from the VST: 15 part controls and 4 macros, always beside the tone list (7.11).
- **Studio Set panel**, always on screen: click a part to send tones to it, or drag a tone onto it (7.10).

- **Mixer** that shows which part you are working on and which part is playing, plus Part Settings, Part EQ, Studio Set Effects, Master EQ and Splits & Layers (7.13).
- **Automatic connect:** the Workbench finds the INTEGRA-7 by itself, and reconnects when you switch it off and on (5.3).
- **Your V1.5 settings come with you:** saved patches, expansion slots, MIDI ports, Studio Set names and user Studio Sets are imported the first time 2.0 runs (Section 6).

The Workbench and the Integra7Control VST

Sierra Digital Audio also makes the free **Integra7Control VST**, a plugin that turns your DAW into a tone browser and controller for the INTEGRA-7. The two work well together: use the VST to choose and control tones while you produce in your DAW, and the Workbench for Studio Set editing, the mixer, backups and loading expansions. They share the same tone list, instrument tiles, styles and macro ideas, so what you learn in one works in the other.

> Close one before using the other. Both use the INTEGRA-7's MIDI port, and often only one program at a time can open it (see Troubleshooting).

Trademarks. Roland and INTEGRA-7 are trademarks of Roland Corporation. Apple, Mac and macOS are trademarks of Apple Inc. Windows is a trademark of Microsoft Corporation. The Integra7Control Workbench is an independent product of Sierra Digital Audio and is not affiliated with or endorsed by Roland Corporation, Apple Inc. or Microsoft Corporation.

Features

Click any feature to go to its description.

Feature	What it does
7.1 The main window	A quick tour of every area of the window.
7.2 Sound Module	MIDI ports, Device ID, Part channel and Studio Set channel; connects by itself.
7.3 Instrument tiles	17 instrument families plus Favourites, Recent and Studio Sets, each with a tone count.
7.4 Tone lists	Play, Send and Save on every tone; sort by any column; narrow by category.
7.5 Search and sound bank filter	Find tones by name across all 6,000+ tones, or show one sound bank or expansion.
7.6 Favourites, Recent and Saved Patches	Star the tones you like, get back to recent ones, and keep up to 256 saved patches.
7.7 Expansion slots	Tell the Workbench which expansions are loaded, or load them into the INTEGRA-7.
7.8 Preview and Preview Options	Hear a tone or a Studio Set part: a phrase, a scale, a loop or your own MIDI file.
7.9 Play Entire List and Single Patch	Play every tone in a list in turn; send or play any bank and patch, including user tones.
7.10 Studio Set panel	The current Studio Set's 16 parts: click a part to target it, drag a tone onto it, play it.
7.11 Part Controls	15 part controls: volume, pan, sends, filter, envelope, vibrato, portamento.
7.12 Macros	One knob moves up to 4 part controls, each over its own range.
7.13 Mixer	Level, pan, sends, mute, solo and output for all 16 parts, plus Master Level and Key Shift.

7.14 Part Settings and Part EQ	Octave, tuning, mono/poly, legato, bend range and portamento; a 3-band EQ per part.
7.15 Studio Set Effects and Master EQ	The reverb and chorus every part shares, and the EQ for the whole Studio Set.
7.16 Splits & Layers	Which part plays which keys, and how hard you have to play.
7.17 User Studio Sets	8 Studio Sets of your own: copy, rename, edit and delete, then write them on the INTEGRA-7.
7.18 Backup & Restore	Back up any or all of the 64 Studio Sets to .syx files, and restore them.
7.19 Sound Banks	Every bank in the tone list: show or play all of its tones.
7.20 MidiControl and the I7 button	Import the Workbench's saved patches into MidiControl.
7.21 Styles	Choose one of four colour styles.

Getting started

- 4. Installing the Workbench
- 5. Connecting the INTEGRA-7
- 6. The first run
- 8. Troubleshooting
- Appendix 2 - Version history

4. Installing the Workbench

4.1 Windows

The Workbench for Windows is downloaded from the Sierra Digital Audio website as one installer, **setupIntegra7ControlWorkbench_PC-V2.0.exe**. It contains everything the Workbench needs; nothing else has to be installed.

1. **Download the installer.** Go to sierradigitalaudio.com, open **Products → Integra7Control**, and click the Windows Workbench 2.0 download. Your browser saves **setupIntegra7ControlWorkbench_PC-V2.0.exe** to your Downloads folder. If the browser warns that the file isn't commonly downloaded, choose **Keep**.
2. **Close the Workbench** if an older version is running, and close any DAW that uses the INTEGRA-7.
3. **Run the installer.** Double-click it in your Downloads folder. If Windows shows **Windows protected your PC**, click **More info**, then **Run anyway**: the Workbench is free and isn't signed with a paid certificate, so Windows doesn't recognise it yet. Windows then asks for administrator permission; click **Yes**.
4. **Follow the installer.** Click **Next** on the welcome page, accept the licence, and type your name (and organisation, if you like) on the information page. Keep the suggested folder (`C:\Program Files\Integra7Control`), and tick **Create a desktop shortcut** if you want one. Click **Install**.
5. On the last page, leave **Launch Integra7Control Workbench** ticked and click **Finish**. The Start menu's **Integra7Control** folder has a **Integra7Control Workbench** shortcut, an **Integra7Control Help** shortcut that opens this guide, and an **INTEGRA-7 Sound List** shortcut for Roland's sound list.

Upgrading from Workbench V1.5

Run the 2.0 installer as above. It installs over V1.5 in the same folder, so there is nothing to uninstall first. V1.5's shortcuts are replaced by 2.0's, including a desktop shortcut if you had one. The first time 2.0 runs, it imports your V1.5 settings: your saved patches, expansion slots, MIDI ports and Device ID, Studio Set names and user Studio Sets (Section 6).

> **Tip:** MidiControl's **I7** button finds the Workbench in the same place as before, so it keeps working with 2.0.


4.2 Mac

> **Mac requirements:** a Mac with Apple Silicon (M1 or later) and macOS 12 Monterey or later. Not compatible with Intel-based Macs.

The Workbench for Mac is downloaded as **setupIntegra7ControlWorkbench_Mac-V2.0.zip**. It contains the program, **Integra7Control.app**.

1. **Download the Workbench.** On sierradigitalaudio.com, open **Products → Integra7Control** and click the Mac Workbench 2.0 download. Safari saves **setupIntegra7ControlWorkbench_Mac-V2.0.zip** to your Downloads folder.
2. **Unzip it** by double-clicking it in Finder. The Workbench appears next to the zip. Finder may show it as just **Integra7Control**, with its keyboard icon, because the Mac usually hides the **.app** ending.
3. **Install it.** Drag **Integra7Control** onto **Applications** in the Finder sidebar. If that is awkward, press **Command + N** for a second Finder window, click **Applications** in it, and drag Integra7Control from Downloads into that window.
4. **Unblock it.** The Workbench is free and isn't signed with a paid Apple developer certificate, so macOS blocks it until you allow it once. Open **Terminal** (Applications → Utilities), paste this command, press **Return**, and type your Mac password (nothing appears while you type it):

   ```
   sudo xattr -dr com.apple.quarantine /Applications/Integra7Control.app
   ```

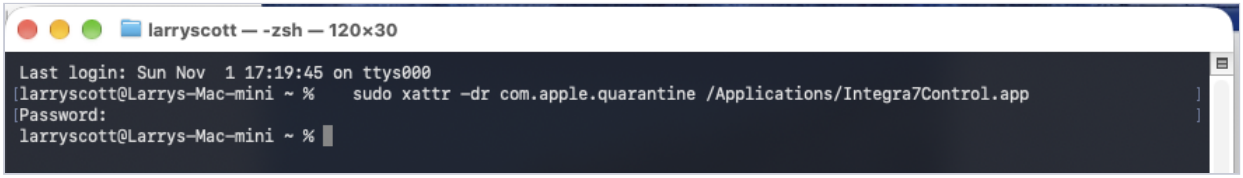   The unblock command in Terminal. When the prompt comes back with no message, it has worked.

5. **Start it** by double-clicking **Integra7Control** in Applications. To keep it in the Dock, right-click its Dock icon and choose **Options → Keep in Dock**.

You unblock each new version once; after that it opens normally every time. If macOS shows a message that the Workbench "can't be opened" or "is damaged", see Appendix 1 for the reason and another way to allow it.

4.3 Updating and uninstalling

- **To update on Windows**, close the Workbench and run the new installer. **On the Mac**, quit the Workbench, drag the new **Integra7Control.app** into Applications (choose **Replace**), and run the unblock command again. Your settings are kept.
- **To uninstall on Windows**, open **Settings → Apps → Installed apps**, find **Integra7Control**, and choose **Uninstall**. Your settings are kept in `%APPDATA%\Sierra Digital Audio\Integra7Control Workbench`; delete that folder too to remove everything.
- **To uninstall on the Mac**, quit the Workbench and drag **Integra7Control.app** from Applications to the Trash. The settings are in `~/Library/Application Support/Sierra Digital Audio/Integra7Control Workbench`.

5. Connecting the INTEGRA-7

Connect the INTEGRA-7 to the computer with a USB cable, directly rather than through a hub, and install Roland's INTEGRA-7 driver. With Roland's driver the INTEGRA-7's **SYSTEM - USB Driver** setting must be **VENDER** (Roland's spelling). This is the same setting on Windows and on the Mac, so you can move the INTEGRA-7 between a PC and a Mac without changing it.


5.1 Windows

Download and install the INTEGRA-7 driver for your version of Windows from Roland's website: **roland.com** → **Support** → **INTEGRA-7** → **Updates & Drivers**, and follow Roland's instructions. The INTEGRA-7 then appears as a MIDI device named **INTEGRA-7**.

5.2 Mac


Roland's Mac driver is a universal driver for Apple Silicon and Intel Macs.

1. In a web browser go to **roland.com** → **Support** → **INTEGRA-7** → **Updates & Drivers** and open **INTEGRA-7 Driver Ver.1.0.6 for macOS Sonoma 14.x or later** (or the latest version listed). Check Roland's **Compatibility with macOS** page lists your macOS version.

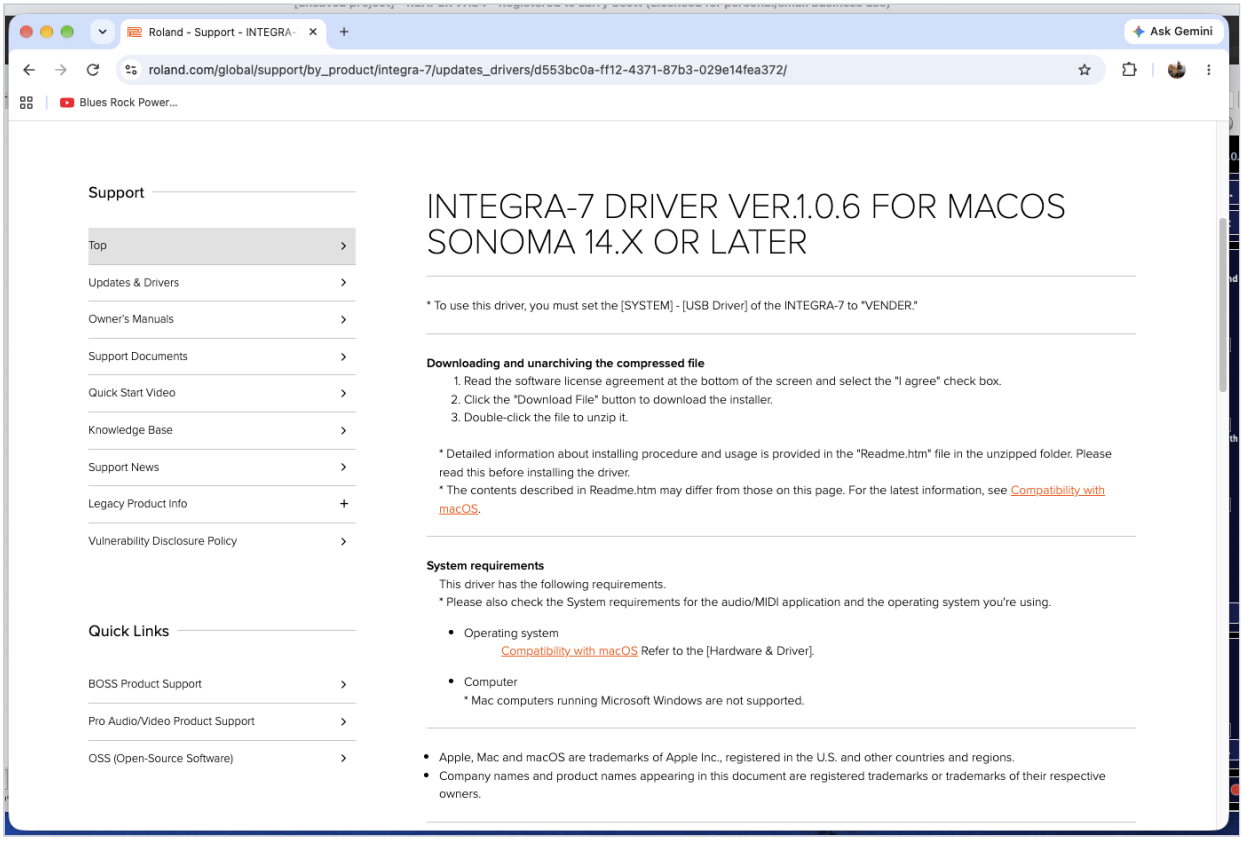


Roland's INTEGRA-7 driver page for macOS.

2. Read the software license agreement at the bottom of the page, tick **I agree**, and click **Download File**. The download is **inter7_mac14drv_m106.tgz**.
3. Double-click the file to unpack it. It unpacks into a folder named **INTEGRA7USBDriver**, which contains Roland's Readme.htm and the installer.
4. **Prepare the Mac.** Quit all applications, and disconnect all USB devices except the keyboard and mouse (eject external drives first), including the INTEGRA-7. If anything was connected, restart the Mac.
5. Double-click **INTEGRA7_USBDriver14.pkg** and follow the installer. If asked whether Installer may access your Downloads folder, click **OK**.

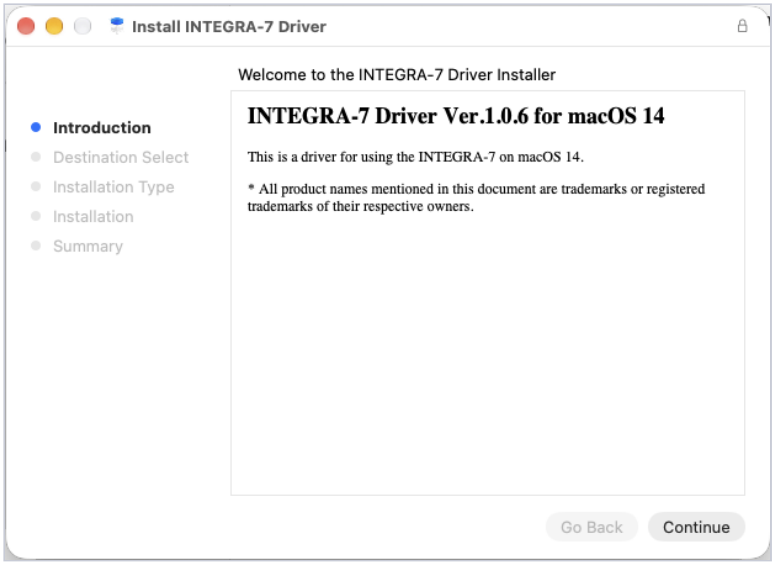

Roland's INTEGRA-7 driver installer.

6. When the installation is complete, click **Restart**. If asked whether to move the installer to the Trash, click **Keep**.
7. After the restart, connect the INTEGRA-7 by USB and switch it on. If macOS asks whether to allow the accessory to connect, click **Allow**. Then reconnect your other USB devices.
8. **Check the Mac sees it.** Open **Audio MIDI Setup** (Applications → Utilities) and choose **Window → Show MIDI Studio**. The **INTEGRA-7** icon should be shown in colour, not gray. If it is gray, click Rescan MIDI, or switch the INTEGRA-7 off and on again.

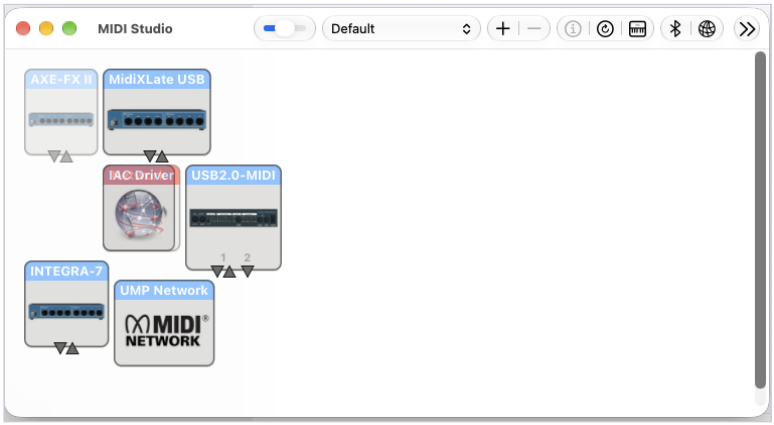


MIDI Studio on the Mac: the INTEGRA-7 is connected and recognized.

Roland's cautions for the Mac: connect and switch on the INTEGRA-7 before starting the Workbench; quit the Workbench before switching the INTEGRA-7 off or unplugging it; if the INTEGRA-7 isn't recognized after the Mac restarts or wakes from sleep, unplug and reconnect it. Disconnect the INTEGRA-7 before installing a macOS update; otherwise you will need to reinstall the driver. The driver's uninstaller is in Applications → Roland → INTEGRA-7 Driver.

5.3 Connecting the Workbench

The Workbench connects to the INTEGRA-7 by itself. When it starts, it looks for a MIDI port with **INTEGRA** in its name (or the port you chose last time) and opens it. The **Sound Module** panel at the top left shows **Connected** in green.

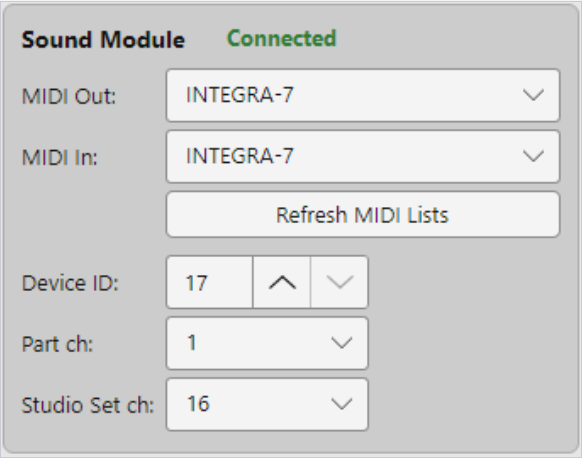

The Sound Module panel: the Workbench is connected to the INTEGRA-7.


- If the INTEGRA-7 is off, the panel shows **Not Connected, waiting** in red. Switch the INTEGRA-7 on and the Workbench connects within a few seconds; there is nothing to click.
- If you switch the INTEGRA-7 off, or unplug it, while the Workbench is open, it waits and reconnects when the INTEGRA-7 comes back.
- To use a different port, for example a MIDI interface, choose it under **MIDI Out** and **MIDI In**. Click **Refresh MIDI Lists** if a port you just connected isn't listed. The Workbench remembers your choice.
- If the panel says **Connected (no MIDI In)**, the Workbench can send tones but can't read the Studio Set: choose the INTEGRA-7 under **MIDI In** too.

The other settings in the panel match settings on the INTEGRA-7. Change them only if you have changed them on the INTEGRA-7:

Setting	What it is
Device ID	The INTEGRA-7's Device ID, used for the messages that read and write its settings. The INTEGRA-7's factory setting is **17**.
Part ch	The channel tones are sent on. You rarely set this by hand: clicking a part in the Studio Set panel sets it for you (7.10).
Studio Set ch	The INTEGRA-7's **Studio Set Control Channel** (a SYSTEM setting on the INTEGRA-7, factory default **16**). Studio Set changes are sent on this channel.

6. The first run

The first time the Workbench starts, it shows the **Version History**, so you can see what is new. Untick **Show version history on startup** if you don't want to see it each time; you can always open it again from **About → Version History**.

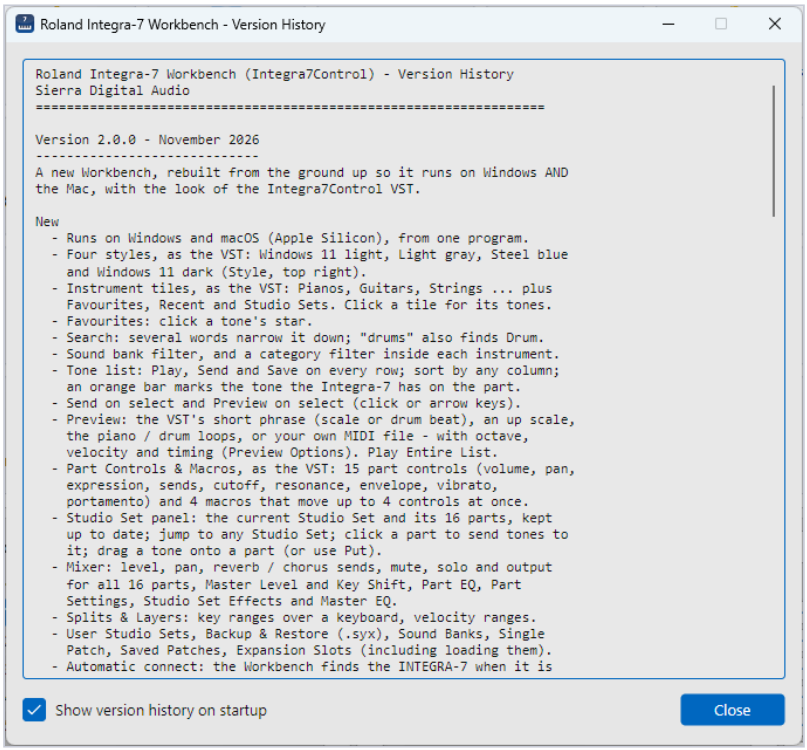

The Version History, shown when the Workbench starts.

Your V1.5 settings

If Workbench V1.5 was installed, version 2.0 imports its settings the first time it runs. The status line at the bottom of the window says what came across, for example *Imported your Workbench V1.5 settings: 33 saved patches, 4 expansion slots, 8 user Studio Sets.*

Imported	Where you find it
Saved patches	The **Saved Patches** panel and window (7.6).
Expansion slots	The **Expansion Sound Banks** panel (7.7).
MIDI ports and Device ID	The **Sound Module** panel (5.3).
Studio Set names	The **Studio Sets** tile and the Studio Set drop-down (7.10).
User Studio Sets	The **User Sets...** window (7.17).


This happens only once. After that, 2.0 keeps its own settings in your user folder (4.3), and V1.5's settings file is left as it was.

Without V1.5

On a computer that never had V1.5, the Workbench starts with no saved patches or favourites, in the **Windows 11 light** style. Two things are worth doing first:

1. **Set your expansion slots.** Click **Expansion Slots...** and choose the expansion in each slot to match your INTEGRA-7, so tones from expansions that aren't loaded are shown in gray (7.7).
2. **Read the Studio Set names.** In the Studio Set panel, click **Scan Names...**. The Workbench reads the names of all 64 Studio Sets from the INTEGRA-7; it takes about a minute or two, and a progress bar shows it running.

The **About** window, on the toolbar, shows the version, how to contact Sierra Digital Audio, and where your settings file is.

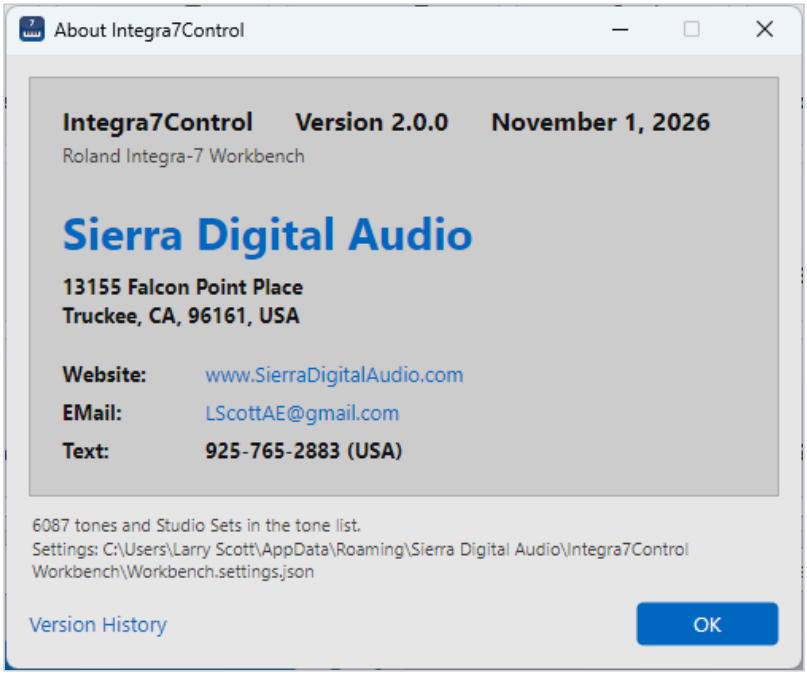


The About window.

7. Using the Workbench

This section describes every part of the Workbench, starting with the main window. Each heading is listed in the Features summary. The Workbench looks and works the same on Windows and the Mac; the screenshots are from Windows, in the **Light gray** style.

7.1 The main window

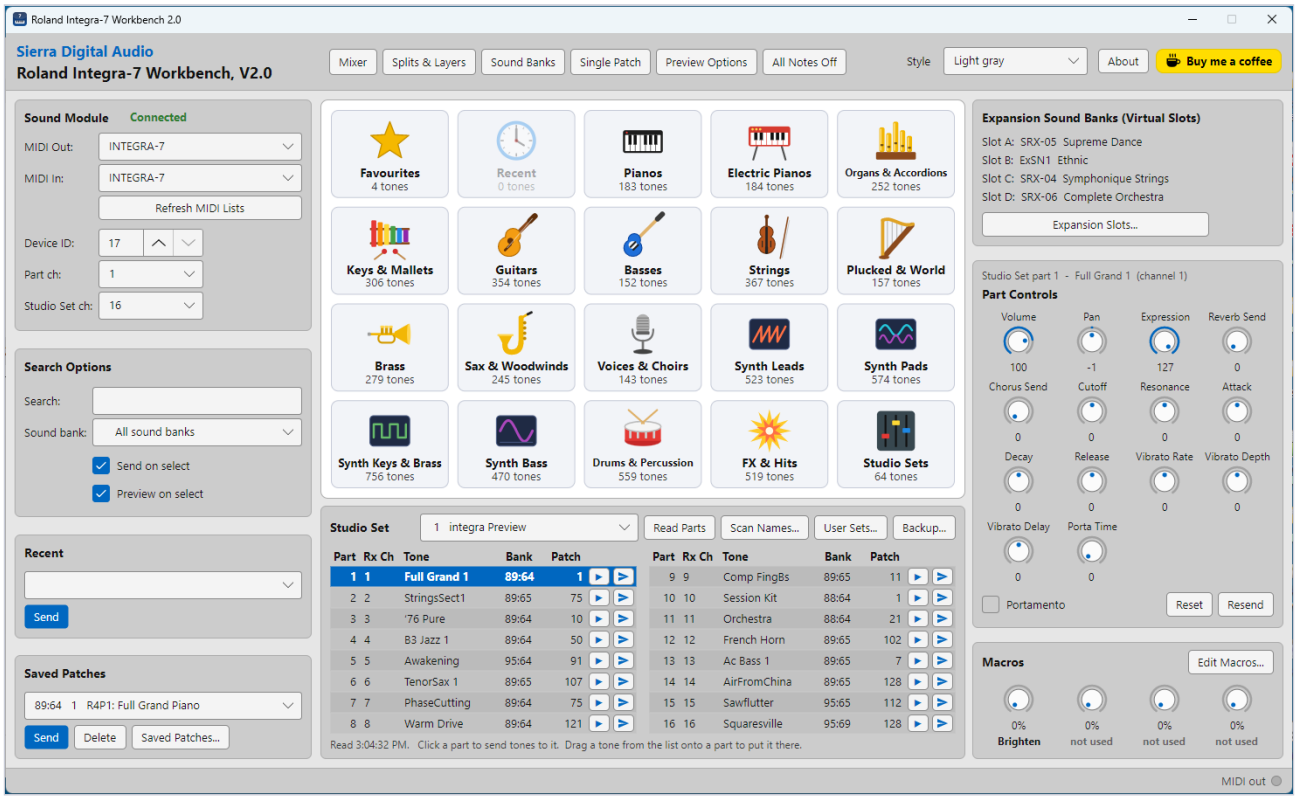

The main window: the instrument tiles in the centre, the Studio Set panel below them, Part Controls and Macros on the right.

Everything you use most is on one screen, so you rarely need to open another window:

Area	What it does
Toolbar	**Mixer**, **Splits & Layers**, **Sound Banks**, **Single Patch**, **Preview Options** and **All Notes Off**, which stops a preview and any stuck notes on all 16 channels. On the right: the **Style** drop-down, **About**, and **Buy me a coffee** if you'd like to support the Workbench. **Sierra Digital Audio**, top left, opens our website.
Sound Module	The MIDI ports and the INTEGRA-7's channels. See 7.2.

Search Options	Search, the sound bank filter, **Send on select** and **Preview on select**. See 7.5 and 7.8.
Recent, Saved Patches	The tones you sent this session, and your saved patches. See 7.6.
Instrument tiles / tone list	The tiles, or the tone list of the tile you clicked. See 7.3 and 7.4.
Studio Set panel	The current Studio Set and its 16 parts. See 7.10.
Expansion Sound Banks	The expansions in the INTEGRA-7's four slots. See 7.7.
Part Controls, Macros	Change the part's volume, pan, sends, filter and more. See 7.11 and 7.12.
Status line, MIDI out	Short messages at the bottom of the window, and a light that flashes green whenever MIDI is sent to the INTEGRA-7.

Hover over any control to see a short tooltip. The window has a fixed size; on a smaller screen it is made to fit.

7.2 Sound Module

The Sound Module panel connects the Workbench to the INTEGRA-7, and does it by itself: see 5.3 for the ports, the connection messages and the **Device ID**, **Part ch** and **Studio Set ch** settings.

The **Part ch** is the most important of these while you work. Tones you choose in the tone list, previews and Part Controls are all sent on this channel, so they reach the part (or parts) that receive on it. You normally set it by clicking a part in the Studio Set panel (7.10); the Part Controls panel then names the part it reaches.

7.3 Instrument tiles

When the Workbench starts, it shows the instrument tiles: a tile for each instrument family, plus **Favourites**, **Recent** and **Studio Sets**. Each tile shows how many tones it holds. Click a tile to open its tone list; tiles with no tones (for example Recent before you have sent anything) are faded and can't be clicked.


The families are the same as in the Integra7Control VST, and each groups one or more of Roland's tone categories:

Tile	Roland categories in it
Pianos	Ac Piano
Electric Pianos	E Piano
Organs & Accordions	Organ, Accordion/Harmonica
Keys & Mallets	Other Keyboards, Bell/Mallet
Guitars	Ac Guitar, E Guitar, Dist Guitar
Basses	Ac Bass, E Bass
Strings	Strings, Ensemble Strings
Plucked & World	Plucked/Stroke
Brass	Brass
Sax & Woodwinds	Sax, Flute, Recorder, Wind
Voices & Choirs	Vox/Choir
Synth Leads	Synth Lead
Synth Pads	Synth Pad/Strings, Synth Bellpad
Synth Keys & Brass	Synth PolyKey, Synth Brass, Synth Seq/Pop, Pulsating
Synth Bass	Synth Bass
Drums & Percussion	Drum, Percussion, Beat&Groove, Phrase
FX & Hits	FX, Sound FX, Hit

The **Studio Sets** tile lists the INTEGRA-7's 64 Studio Sets. Sending one selects it on the INTEGRA-7 (on the Studio Set channel), which changes all 16 parts at once.

7.4 Tone lists

Clicking a tile replaces the tiles with that family's tones. Above the list are the ◀ **Instruments** button (or press **Esc** or **Backspace**) to go back to the tiles, the family name and tone count, **Play Entire List** (7.9), and a drop-down that narrows the list to one of the family's Roland categories.

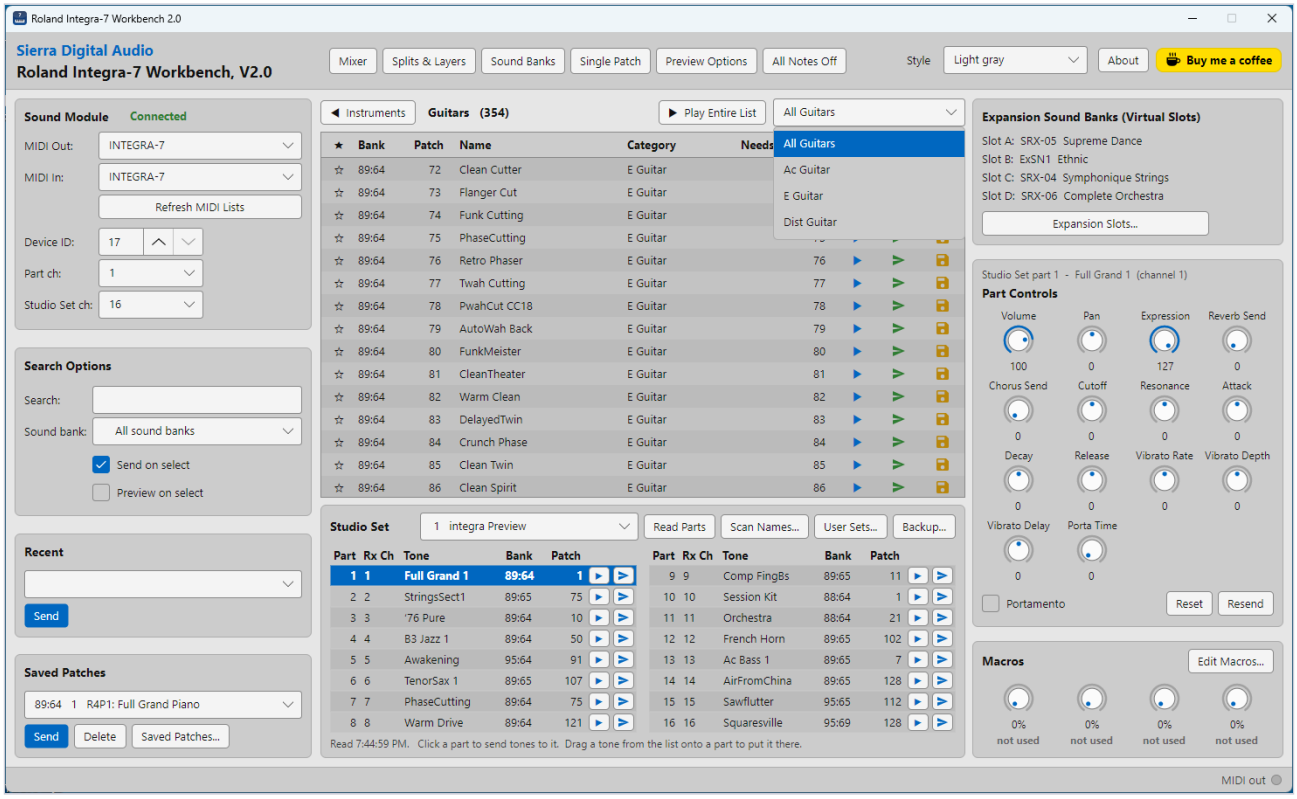


The Guitars list, with the category drop-down open.

Column	Meaning
★	Click the star to add or remove the tone from Favourites (7.6). Clicking a star doesn't send or play the tone.
Bank, Patch	Bank Select MSB:LSB (for example 89:64), and the patch number 1-128 within the bank.
Name, Category	The tone's name and Roland category.
Needs	The expansion the tone needs, for example SRX-03. Blank for built-in tones.
List #	The tone's number in Roland's *INTEGRA-7 Sound List* PDF.
Play ▶	Send the tone and play it (7.8). While it plays the button is an orange ■; click it again to stop.
Send	The green arrow: send the tone to the INTEGRA-7 on the Part channel, without playing it.
Save	The yellow disk: add the tone to your Saved Patches (7.6).

- **Click a tone** to send it. With **Send on select** ticked (in Search Options), the **up/down arrow keys** move through the list and send each tone as you go, which is a quick way to audition while you play.
- **Double-click** a tone, or press **Enter** or **Space**, to hear it. Press Space again to stop.
- **Drag a tone onto a part** in the Studio Set panel to put it on exactly that part (7.10).
- An **orange bar** at the left marks the tone currently on the part.
- **Click a column heading** to sort by that column; click again to reverse the order.


7.5 Search and sound bank filter

Type in the **Search** box in Search Options. From the instrument tiles, the search covers every tone; inside a family, it searches just that family. Type several words to find tones that match all of them, for example *warm pad*. The search matches tone names and categories. Press **Esc** in the box to clear it.

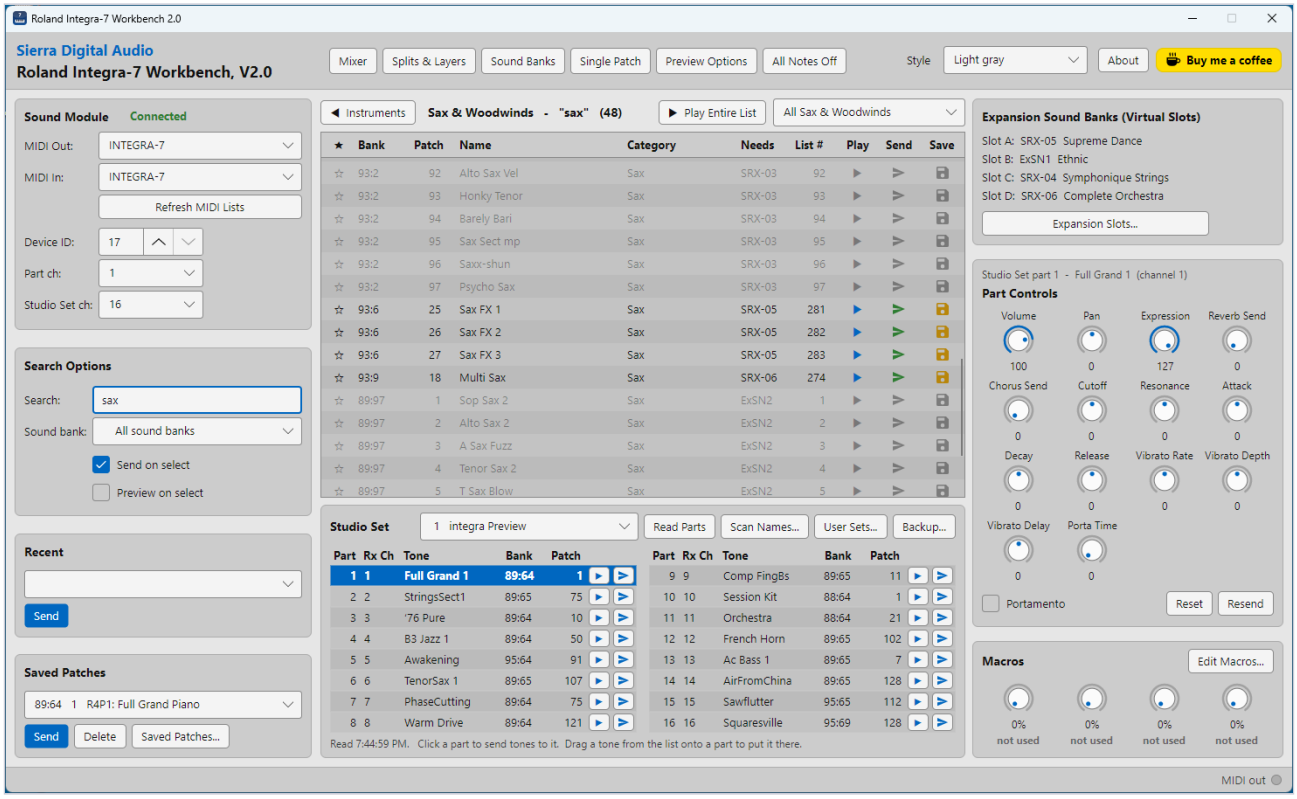

Searching for "sax" inside Sax & Woodwinds. The SRX-03 and ExSN2 tones are gray because those expansions aren't in a slot.


If nothing matches inside a family, Favourites or Recent, the list says so and offers to **Search All Tones** for the same words.

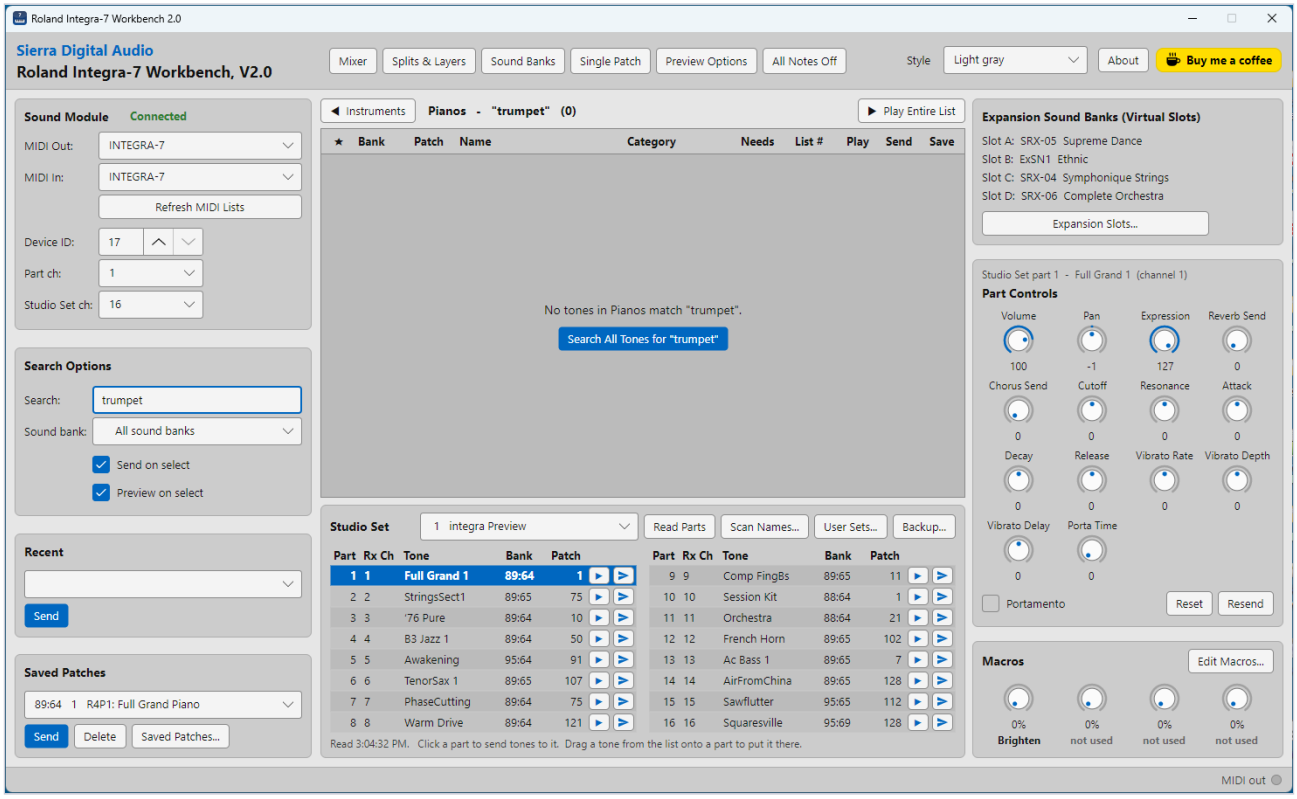

No piano is called "trumpet": click Search All Tones to look in every family.

Sound bank filter


The **Sound bank** drop-down shows only the tones of one sound bank or expansion, such as *SuperNATURAL Acoustic Tones* or *SRX-05 Supreme Dance*. The number after each bank is how many tones it has, and a ***** in front of an expansion means it is in one of your INTEGRA-7's four slots (7.7). With a bank chosen, the tile counts show only that bank's tones. Choose **All sound banks** to see everything again. The **Sound Banks** window lists each bank separately (7.19).

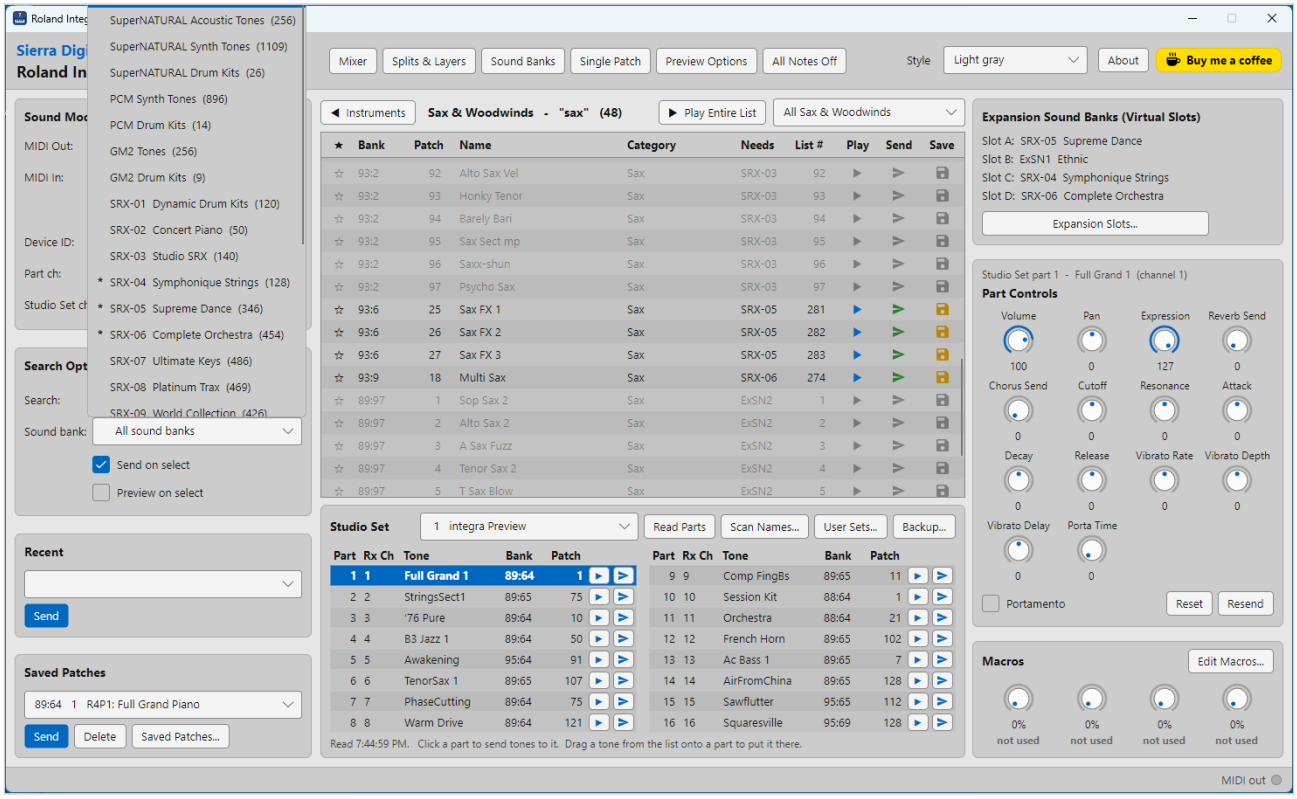

The sound bank drop-down: the * marks the expansions in the slots.


7.6 Favourites, Recent and Saved Patches

Favourites. Click the ★ on a tone to add it to Favourites; click it again to remove it. The **Favourites** tile lists them, and they are kept between sessions.

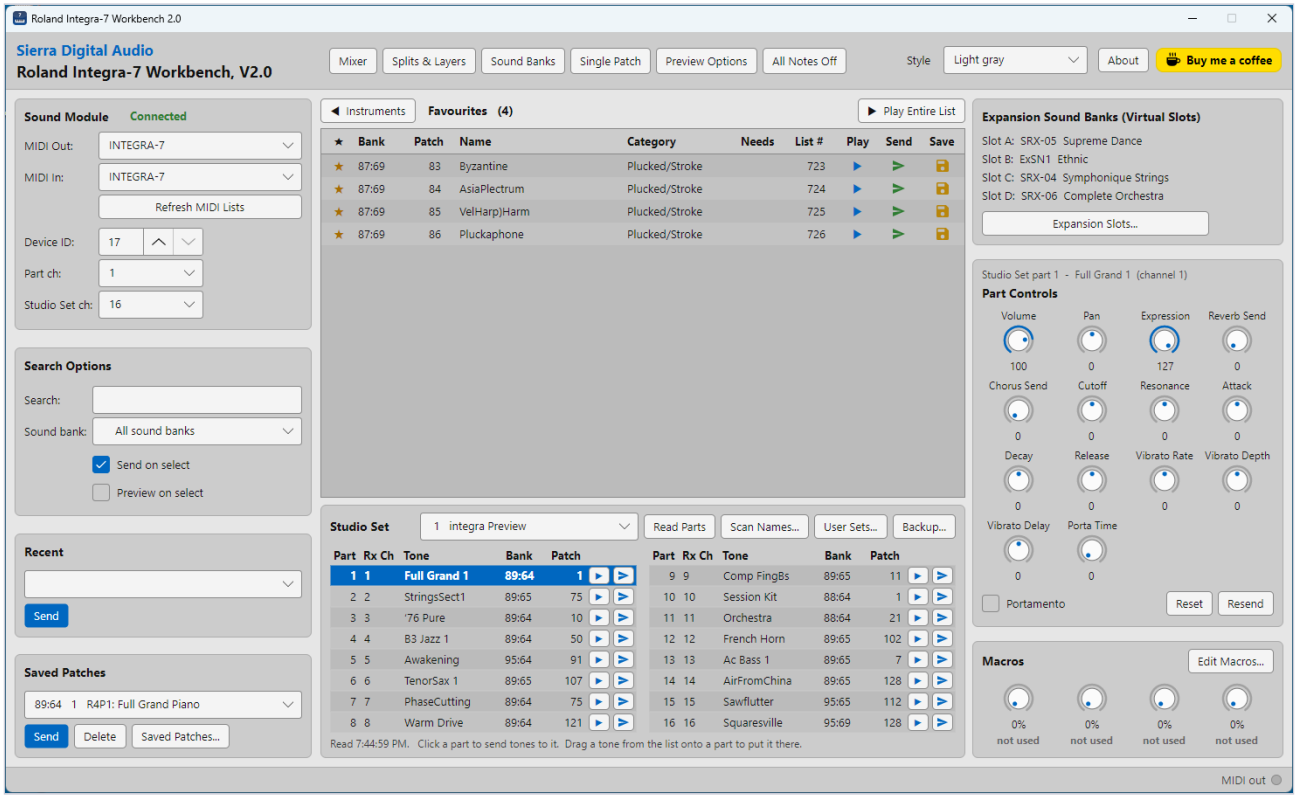

The Favourites list.


Recent. The **Recent** tile and the Recent drop-down (left column) list the last 64 tones you sent, newest first. Choose one in the drop-down and click **Send** to send it again. Recent is for this session only: it starts empty each time the Workbench starts.

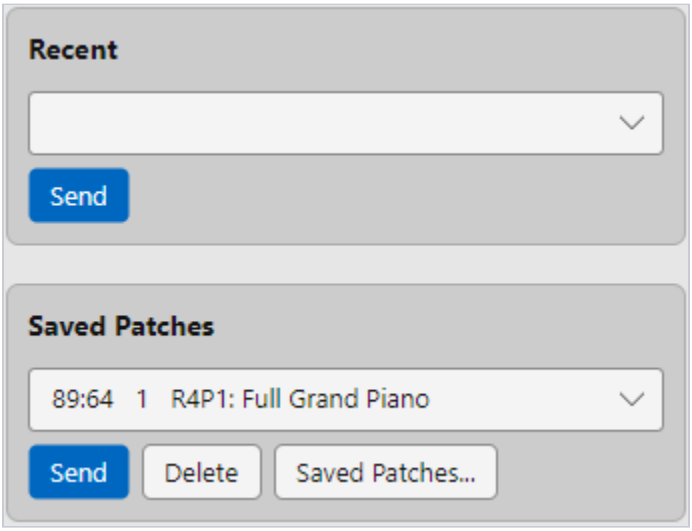

Recent and Saved Patches, in the left column.

Saved Patches. Click the **Save** disk on a tone, give the patch a name (the tone's name is suggested), and click OK. You can keep up to 256 saved patches. They are listed in the Saved Patches drop-down as *bank, patch, name*:


- **Send** sends the chosen patch to the part (it doesn't play it), and **Delete** removes it.
- **Saved Patches...** opens a window with every saved patch, where you can send, delete and move patches up and down to put them in the order you like.
- MidiControl's **I7** button can import your saved patches into MidiControl (7.20).

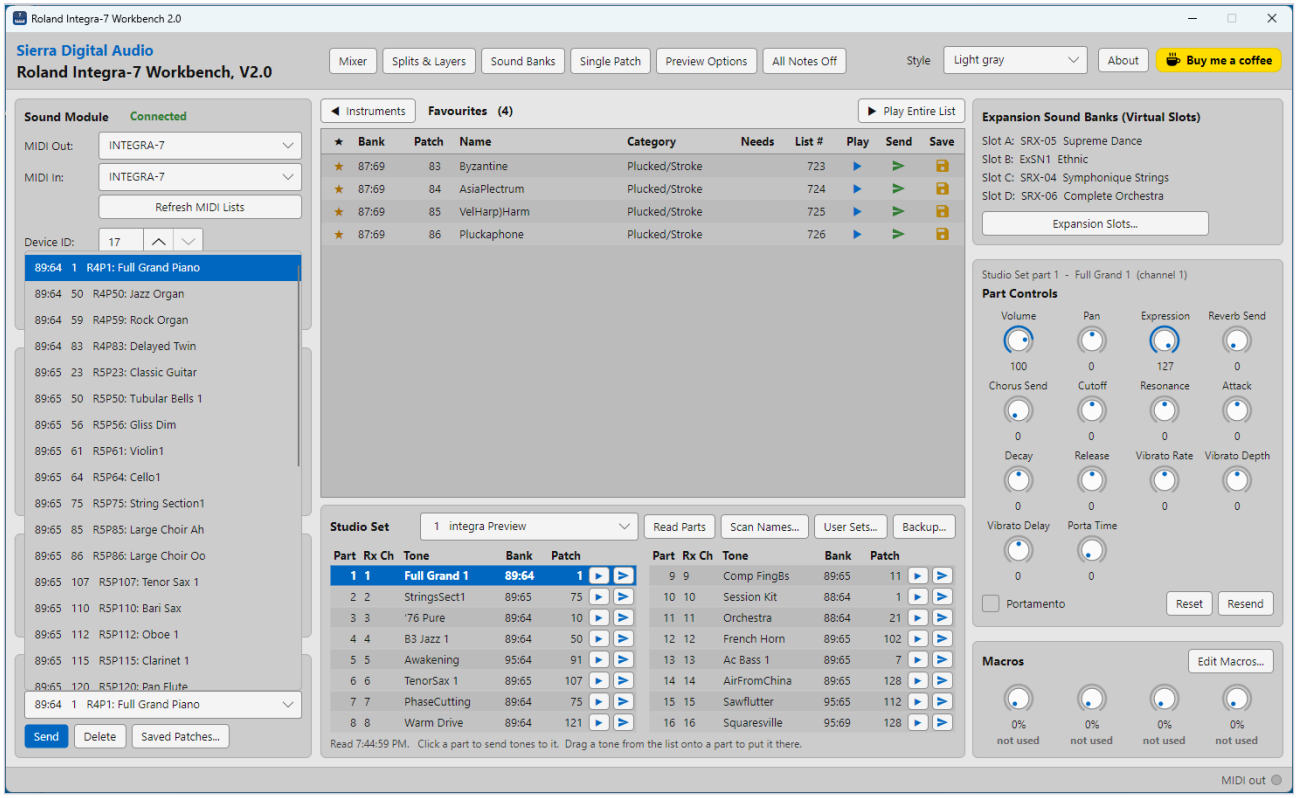

The Saved Patches drop-down.

7.7 Expansion slots

The INTEGRA-7 holds four expansions at a time (SRX boards, ExSN and ExPCM) in its virtual slots A-D. The **Expansion Sound Banks** panel at the top right shows what is in each slot.

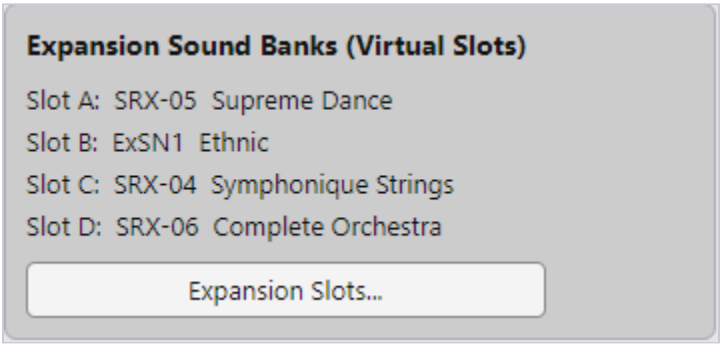


The Expansion Sound Banks panel.

Click **Expansion Slots...** and choose the expansion in each slot:


- **OK** only records your choice. The INTEGRA-7 can't report which expansions are loaded, so set the slots to match it.
- **Load into Integra-7** also loads the chosen expansions into the INTEGRA-7 now. It takes the INTEGRA-7 a few seconds.
- **Clear All Slots** empties all four.

The window also explains how to see the loaded expansions on the INTEGRA-7's front panel, and how to choose which expansions it loads when it is switched on.

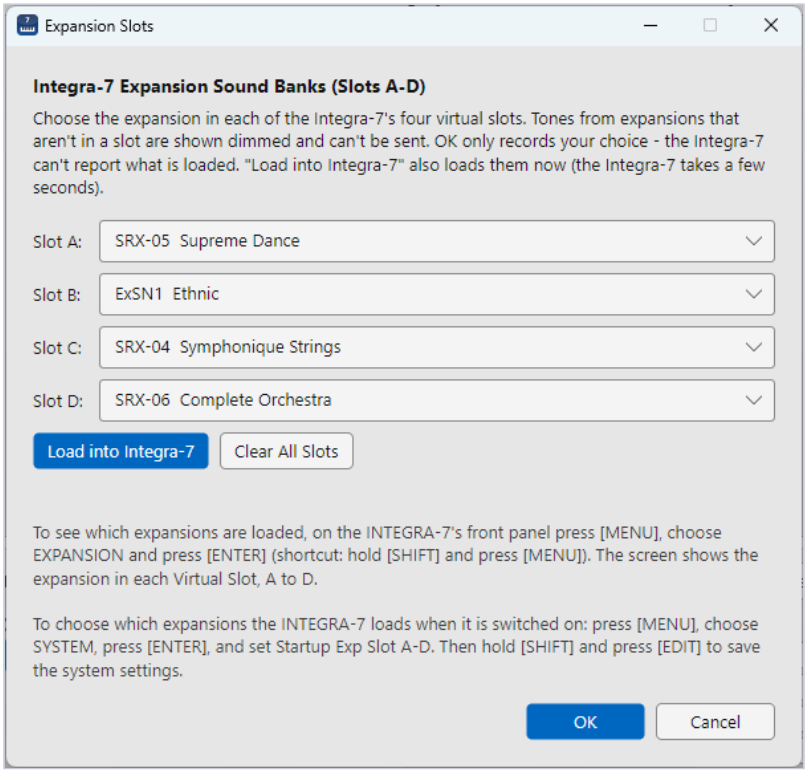

The Expansion Slots window.


Tones from expansions that aren't in a slot are shown in **gray**. Hover over one to see which expansion it needs; it can't be sent or played until that expansion is loaded.

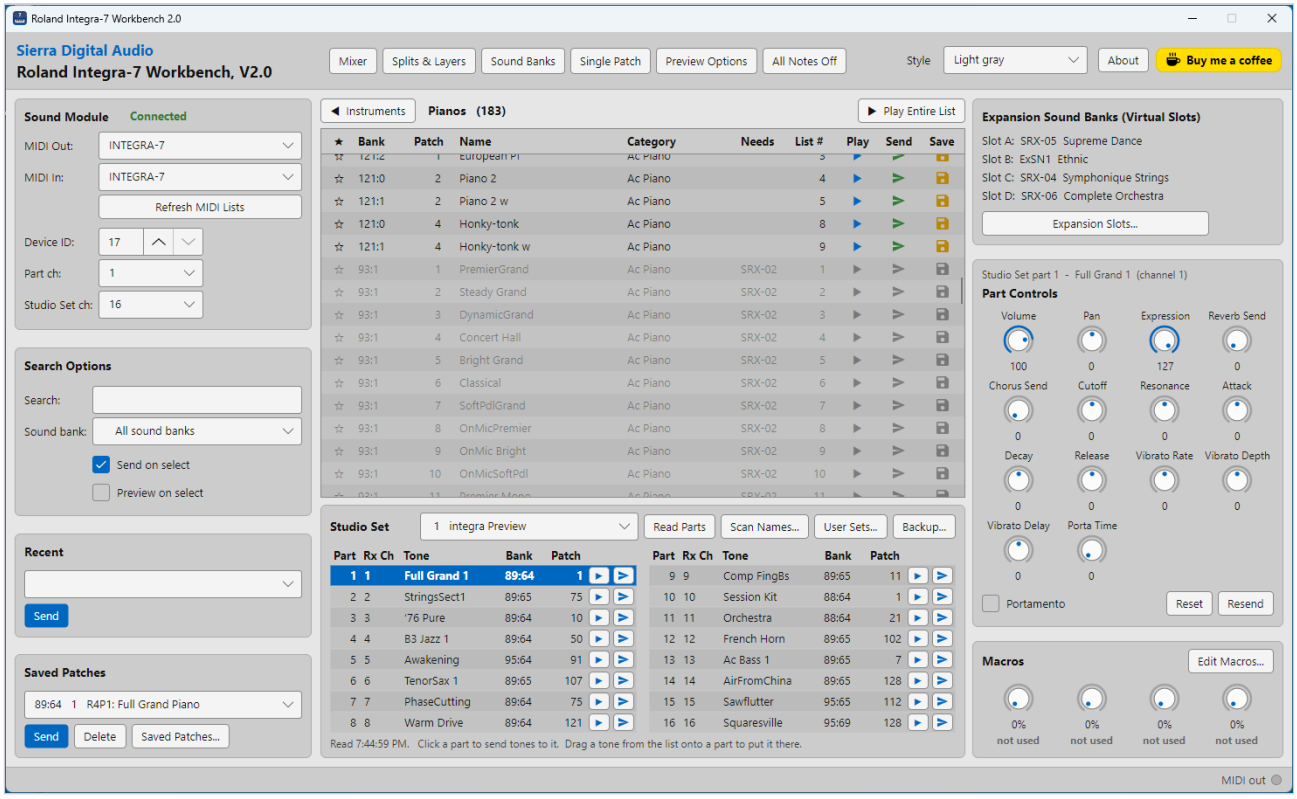

SRX-02 tones in gray: SRX-02 isn't in any slot.

7.8 Preview and Preview Options

Click ▶ on a tone to send it and hear it. While it plays, the button is an orange ■ and the time is shown above the list; click ■ to stop. You can also double-click a tone, or press Enter or Space.

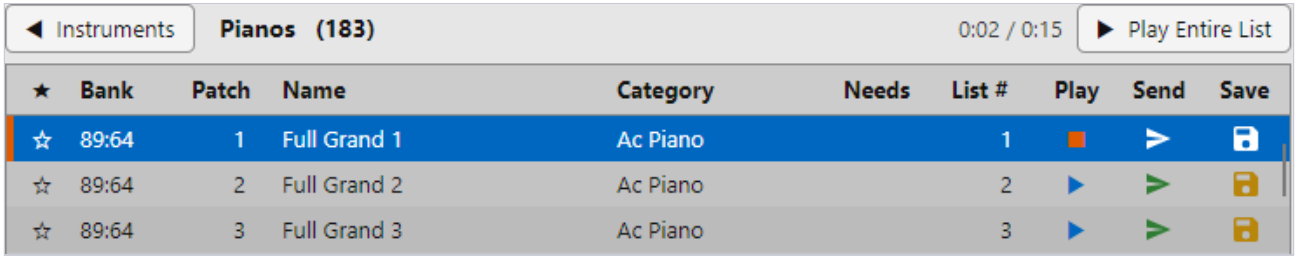


Full Grand 1 playing: an orange ■ on its row, and the time above the list.

Tick **Preview on select** (in Search Options) to hear each tone as you choose it, as in the VST.

The parts in the Studio Set panel have a ▶ too (7.10): it plays the part's own tone on the part's channel.

Preview Options

Preview Options decides how tones are played. Click **Preview Options** on the toolbar; it also opens by itself, beside the main window, the first time you press a ▶. It can stay open while you work, and every preview uses what it shows.

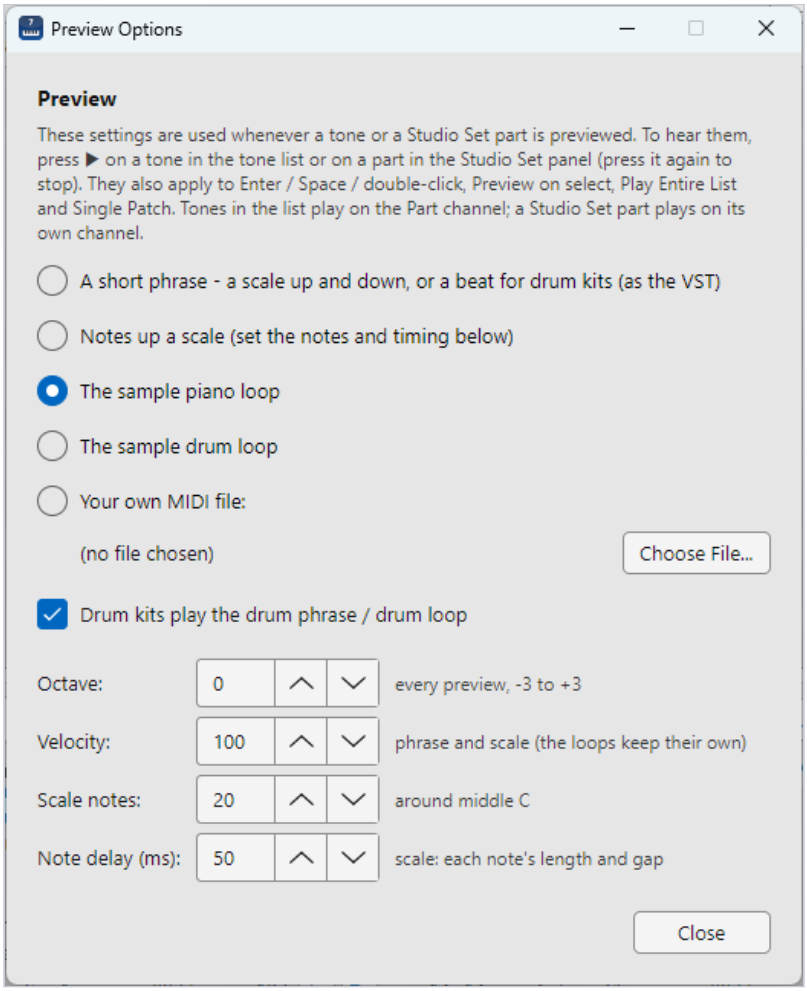


The Preview Options window.

Option	What it does
A short phrase	The VST's preview: a scale up and down, or a beat for drum kits.
Notes up a scale	A scale around middle C, with the number of notes and their timing set below.
The sample piano loop / drum loop	Built-in MIDI loops, good for hearing a tone in a musical context.
Your own MIDI file	Click **Choose File...** and pick a MIDI file to play.
Drum kits play the drum phrase / drum loop	Drum kits get a beat instead of a scale, whatever is chosen above.
Octave, Velocity	Octave (-3 to +3) applies to every preview; velocity to the phrase and scale.
Scale notes, Note delay	For *Notes up a scale*: how many notes, and each note's length and gap.

Tones in the tone list play on the Part channel; a Studio Set part plays on its own channel. Press **All Notes Off** on the toolbar if notes are ever left sounding.

7.9 Play Entire List and Single Patch


Play Entire List, above the tone list, plays every tone in the list in turn, using Preview Options. The list follows along, and the progress is shown above it ("1 of 183"). Gray tones are skipped. Click ■ **Stop** to stop.

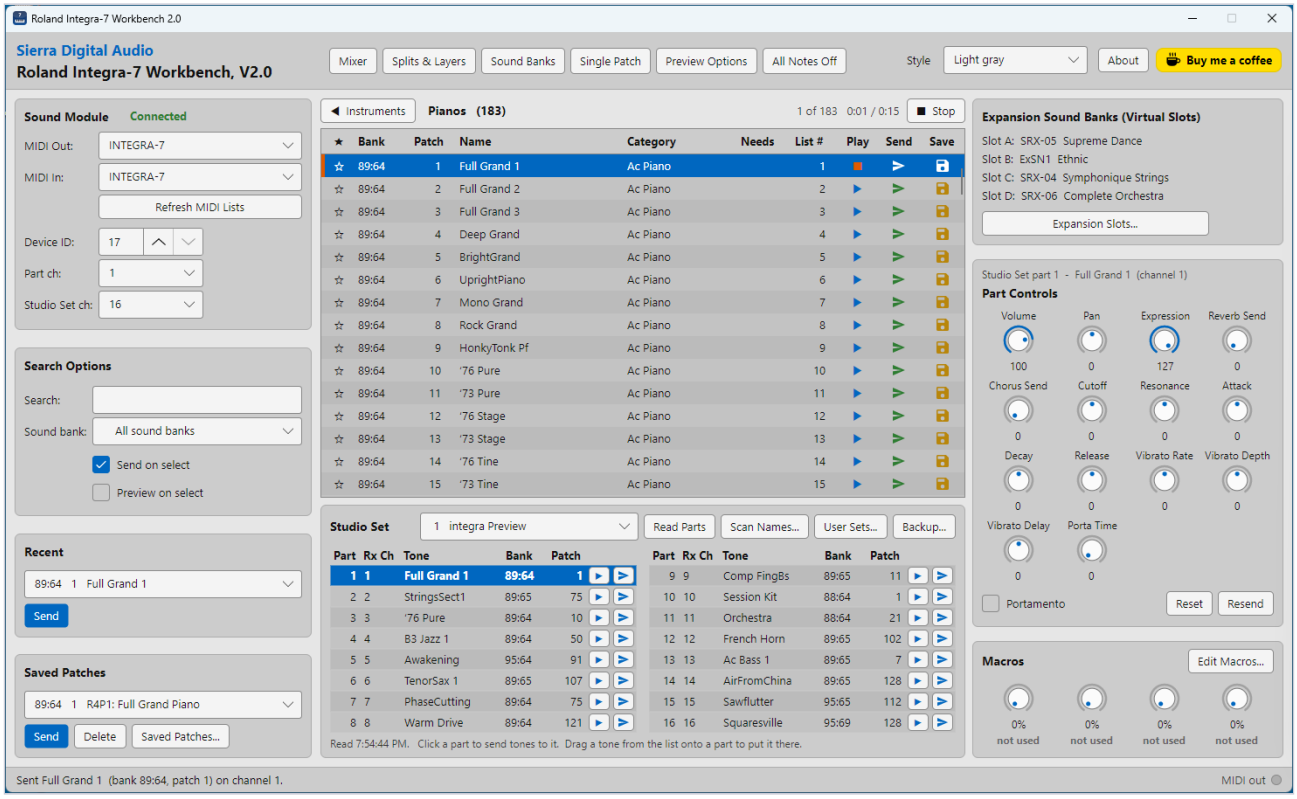

Play Entire List playing the Pianos, at tone 1 of 183.

Single Patch

Single Patch on the toolbar sends any bank and patch directly. Use it for your own **user tones**, which aren't in the tone lists. Set the **Bank MSB**, **Bank LSB** and **Patch**, then click **Send**, **Play**, or **Save...** to add it to your Saved Patches. If the tone is in the tone list, its name and sound bank are shown.

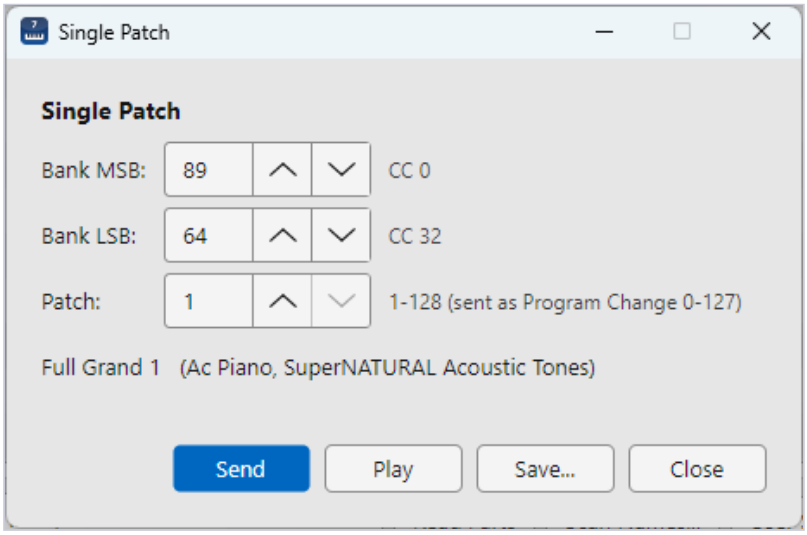


The Single Patch window.

User bank	MSB : LSB	Patches
SuperNATURAL Acoustic	89 : 0-1	1-128 in each LSB (256)
SuperNATURAL Synth	95 : 0-3	1-128 in each LSB (512)
SuperNATURAL Drum Kits	88 : 0	1-64
PCM Synth	87 : 0-1	1-128 in each LSB (256)
PCM Drum Kits	86 : 0	1-32

7.10 Studio Set panel

The Studio Set panel, below the tone list, shows the current Studio Set and its 16 parts: each part's receive channel (**Rx Ch**), tone, bank and patch. The Workbench reads them from the INTEGRA-7 (it needs MIDI In), and reads them again after you send a tone or a Studio Set, so the panel stays up to date.

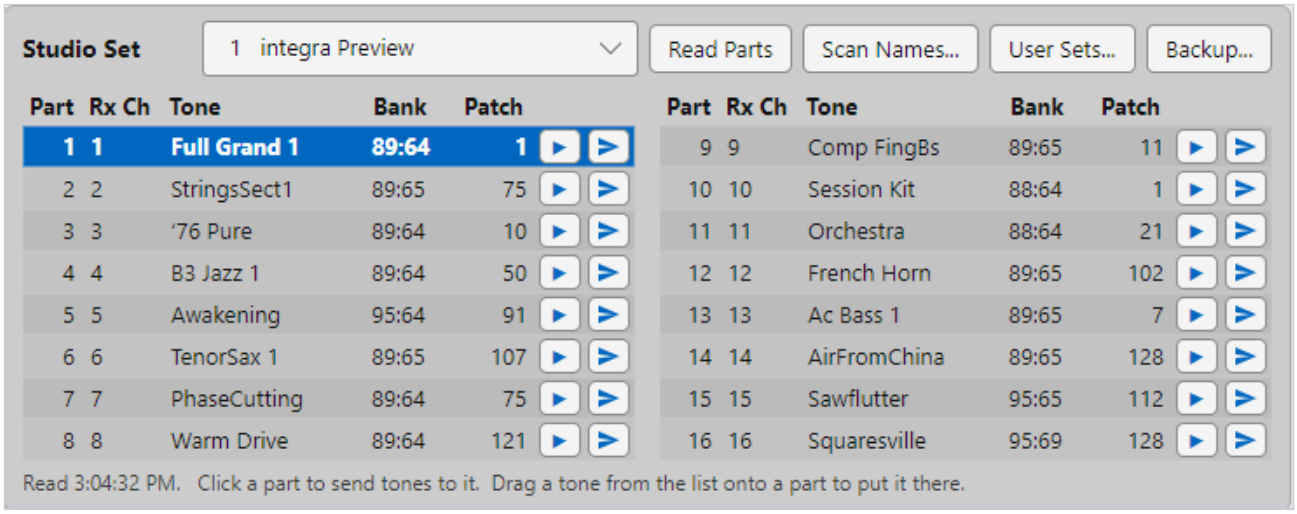

The Studio Set panel: part 1 is the target part.


- **Click a part** to make it the **target part**. It is shown in the selection colour, the Part channel changes to its receive channel, and from then on the tone list, previews and Part Controls work on it.
- **Drag a tone** from the tone list onto a part to put it on exactly that part, even when several parts share a channel. Dropping it also makes that part the target.
- ▶ plays the part as it is now, on its own channel, using Preview Options. It doesn't send the tone again, so Part Controls and macro changes are kept. Other parts on the same channel play too.

- **Send** ➤ sends the part's own tone again.

The Workbench shows the parts' tone names and the Studio Set name exactly as they are stored on the INTEGRA-7. It learns each Studio Set's name when it selects that set from memory, so a set you have renamed but not yet written keeps its old name in the lists.

Choosing a Studio Set

Choose any of the 64 Studio Sets in the drop-down at the top of the panel to jump to it. It is selected on the Studio Set channel, and the panel reads its parts.

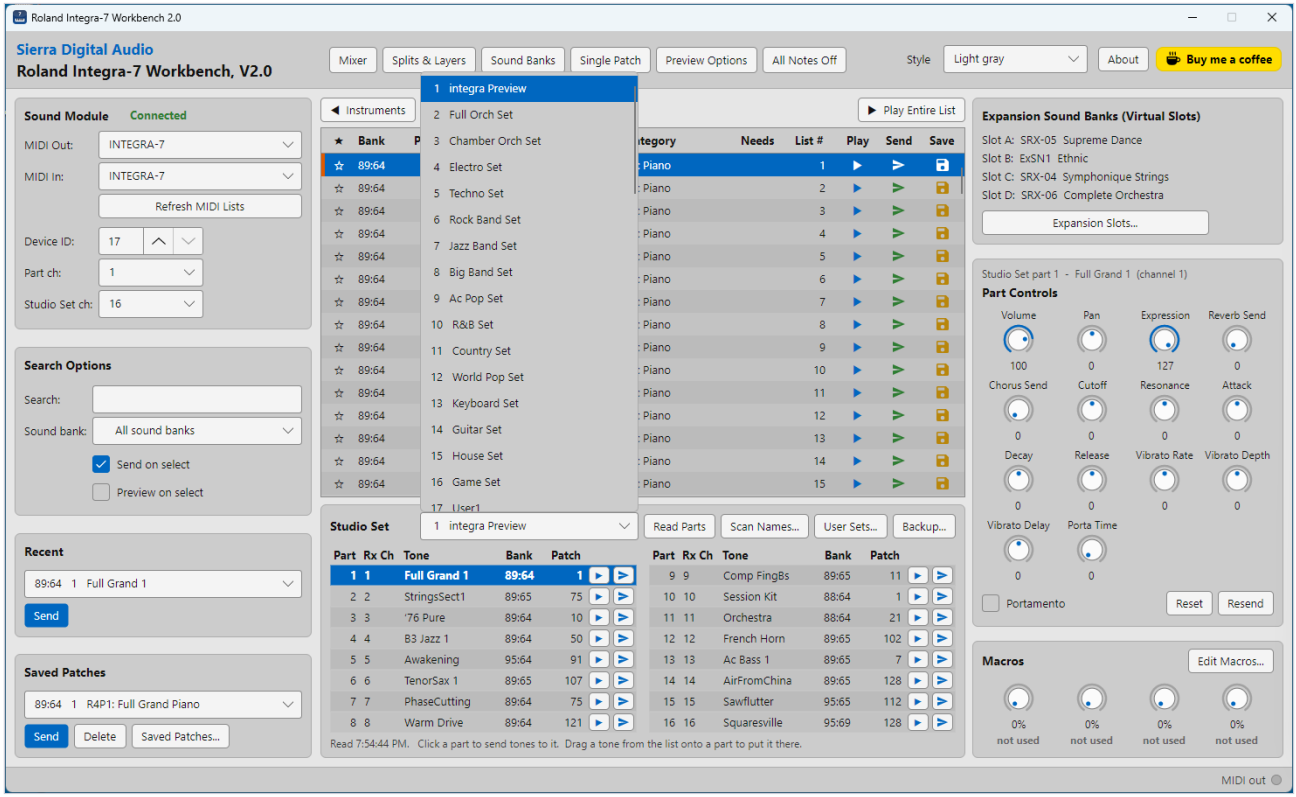


The Studio Set drop-down.

> Selecting a Studio Set replaces all 16 parts. Changes you have made to the current Studio Set (in the Mixer, Part Settings, Splits & Layers and so on) are lost unless you have written it on the INTEGRA-7 first.

The panel's buttons

- **Read Parts** reads the current Studio Set again.
- **Scan Names...** reads the names of all 64 Studio Sets, so the drop-down and the Studio Sets tile show your own names. It selects each Studio Set in turn and then goes back to yours. It takes about a minute or two, and a progress bar shows it running.


- **User Sets...** manages your 8 user Studio Sets (7.17), and **Backup...** backs up Studio Sets to files and restores them (7.18).

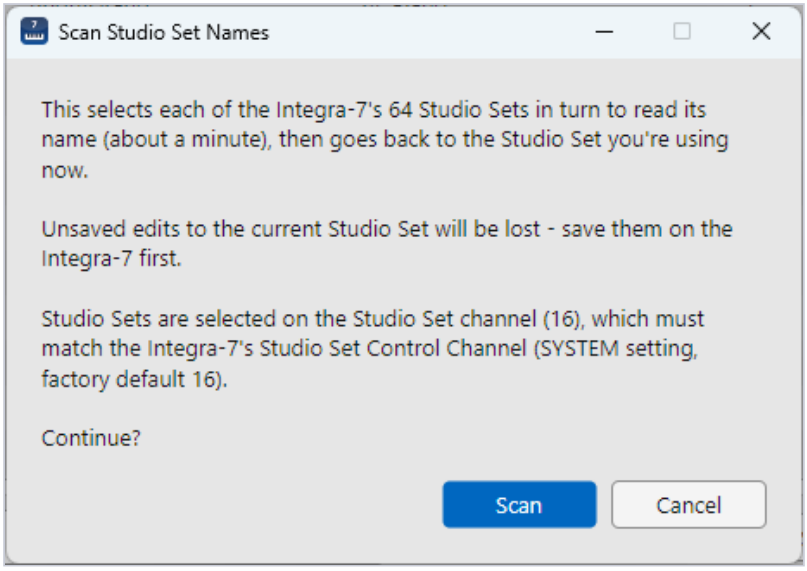

Scan Names asks before it starts.

7.11 Part Controls

The Part Controls panel, at the right of the window, sends MIDI Control Change messages on the Part channel, with the same controls as the Integra7Control VST. The caption at the top names the Studio Set part they reach, for example *Studio Set part 1 - Full Grand 1 (channel 1)*. Turn a knob to send it; double-click a knob to reset it.

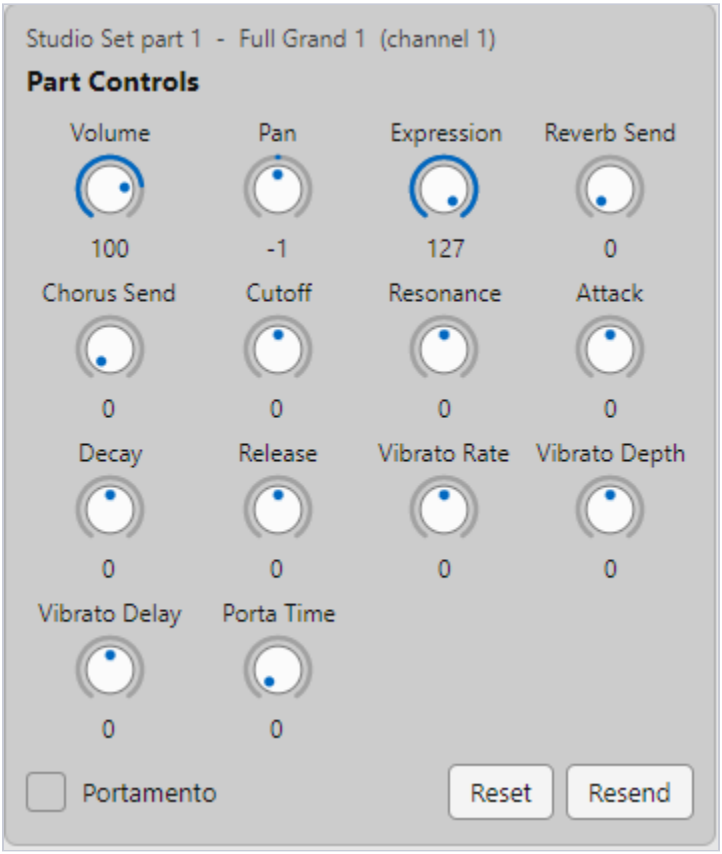

The Part Controls panel.

Control	CC	Notes
Volume	7	Part volume, 0-127.
Pan	10	-64 (left) to +63 (right), 0 = centre.
Expression	11	Expression, 0-127.
Reverb Send / Chorus Send	91 / 93	Send to the Studio Set's reverb and chorus.
Cutoff, Resonance	74, 71	Offsets from the tone's own setting; 0 = no change.
Attack, Decay, Release	73, 75, 72	Envelope offsets; 0 = no change.
Vibrato Rate, Depth, Delay	76, 77, 78	Vibrato offsets; 0 = no change.
Porta Time / Portamento	5 / 65	Portamento time and on/off.


- **Reset** sets every control back to its default and sends it.

- **Resend** sends the tone and the controls you have changed again, for example after switching the INTEGRA-7 on.
- **Pan**, **Reverb Send** and **Chorus Send** change the part's own settings, so the Mixer's knobs follow them (7.13).

The knobs show what you last sent, not what the part holds: the Workbench can't read controllers back. **Reset** sends Reverb Send and Chorus Send as 0, which also sets the part's sends to 0. How much an offset changes the sound depends on the tone.

7.12 Macros

A macro is **one knob that moves several part controls together**, each over its own range. Instead of turning Cutoff and Resonance one after the other, you turn one "Brighten" knob and both move at once. The four macro knobs are in the Macros panel, below Part Controls.

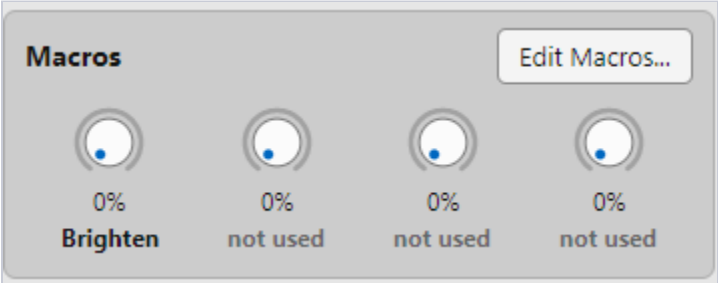

The Macros panel: Macro 1 named Brighten.


Each macro has up to four rows. In each row you choose a part control and two values: **From** is sent when the macro knob is at 0%, and **To** is sent at 100%. In between, the value moves smoothly from one to the other. Set To lower than From to move a control the opposite way.

About 64: Pan, Cutoff, Resonance, Attack, Decay, Release and the Vibrato controls use 64 for "the tone's own setting". A From value of 64 therefore leaves the tone as Roland designed it when the macro is at 0%.

Example: a "Brighten" macro

1. Click **Edit Macros...** at the top of the Macros panel.
2. Click **Load example into Macro 1**, or set it up by hand: type **Brighten** in Macro 1's name box; in its first row choose **Cutoff (CC 74)**, From **64**, To **110**; in its second row choose **Resonance (CC 71)**, From **64**, To **90**.
3. Close the window. The first macro knob is now labelled **Brighten**.

4. Play a pad or a synth tone and turn the Brighten knob: at 0% the tone sounds as usual, and as you turn it up the filter opens and the sound gets brighter and more resonant.

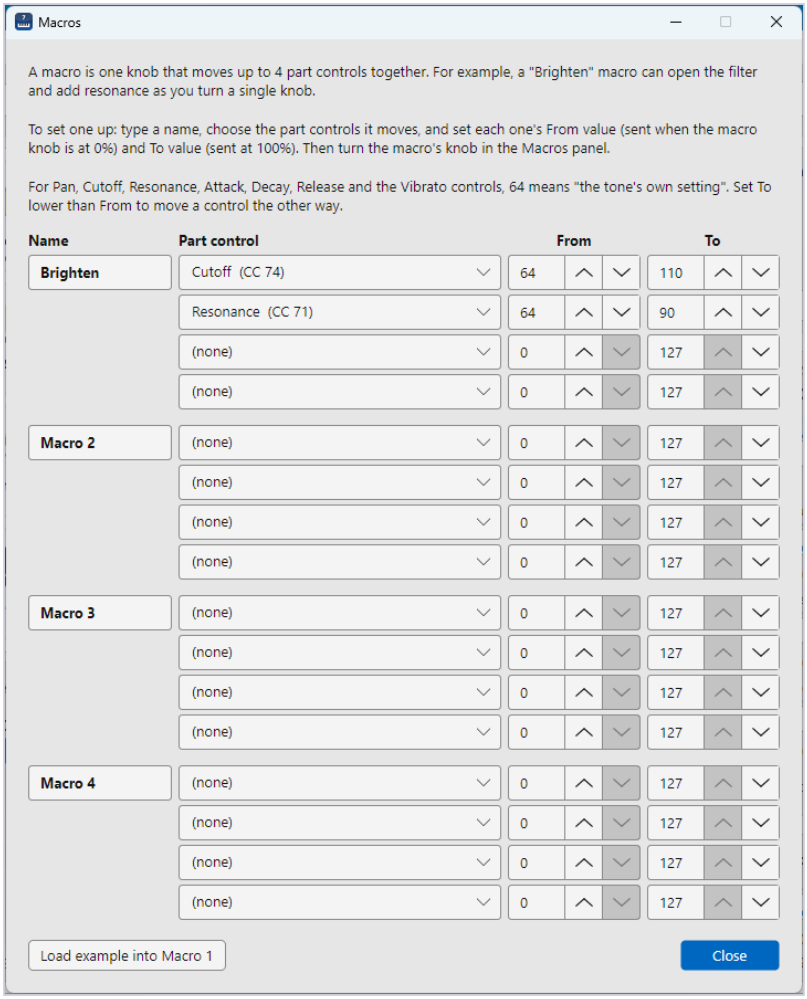


The Macros window with the Brighten example in Macro 1.

More ideas: a **Swell** macro with Expression From 40 To 127 for fade-ins; a **Space** macro with Reverb Send From 20 To 90 and Chorus Send From 0 To 60; or a **Soften** macro with Attack From 64 To 100 and Cutoff From 64 To 40. A macro sends its controls directly; the Part Controls knobs themselves don't move. Macros are kept between sessions.

7.13 Mixer

Click **Mixer** on the toolbar for a strip for each of the current Studio Set's 16 parts, and a Master strip. The Mixer reads every part from the INTEGRA-7 when it opens, and again whenever the main window reads the parts. It can stay open while you work.

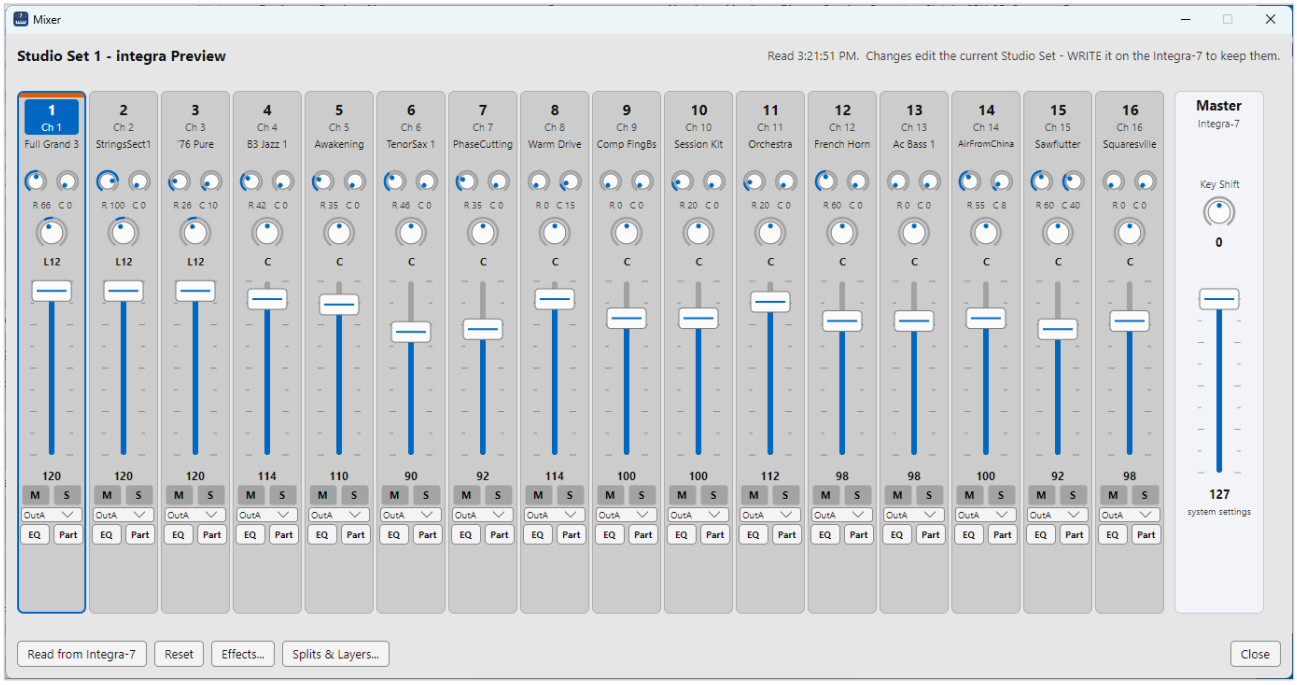

The Mixer: part 1 is the target part, and the orange bar shows it is playing.

On each strip	What it does
Number, Ch, tone	The part number, the channel it receives on, and its tone.
R and C knobs	Reverb send and chorus send (0-127), shown as numbers below them.
Pan knob	Pan, shown as L64 to R63 (C = centre).
Fader	The part's level, 0-127.
M, S	Mute (red when on) and Solo (yellow). Only one part can be soloed.
Output	**OutA**-**OutD** (stereo outputs) or **Out1**-**Out8** (individual outputs).
EQ, Part	Open the part's EQ and Part Settings (7.14).

Drag a fader or knob, use the mouse wheel, or double-click to reset it. Changes are sent straight away.

- The **target part**'s strip (7.10) has its number in the selection colour and a coloured border.
- While the Workbench plays a tone or a part, every strip that receives on that channel shows an **orange bar** at the top. (Notes you play straight into the INTEGRA-7 can't be shown: it doesn't report them over MIDI.)


- The **Master** strip sets the INTEGRA-7's **Key Shift** (-24 to +24 semitones) and **Master Level**. These are system settings for the whole INTEGRA-7, not part of the Studio Set. Double-click the Master fader to put it back to 127.

At the bottom: **Read from Integra-7** reads every part again; **Reset** centres every pan and sets every level to 80% (102), leaving the sends as they are; **Effects...** and **Splits & Layers...** open those windows (7.15, 7.16).

> The Mixer edits the **current** Studio Set. To keep your changes, write the Studio Set on the INTEGRA-7 (7.17). If you select another Studio Set first, they are lost; selecting the same Studio Set again from memory brings back its stored settings, which is a handy way to undo a Reset.

7.14 Part Settings and Part EQ

Click **Part** on a Mixer strip for that part's settings. The window reads the part when it opens, and each change is sent straight away.

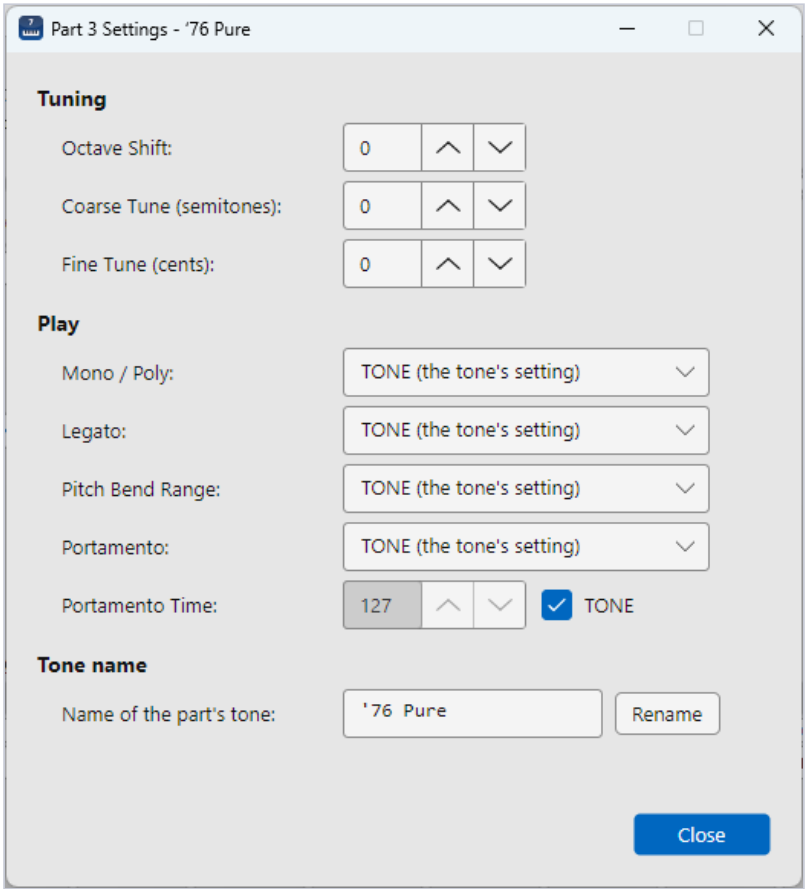


Part Settings for part 3.

- **Tuning:** Octave Shift (-3 to +3), Coarse Tune (-48 to +48 semitones) and Fine Tune (-50 to +50 cents).
- **Play:** Mono / Poly, Legato, Pitch Bend Range, Portamento and Portamento Time. **TONE** means "use the tone's own setting".
- **Tone name:** the name of the part's tone, as stored on the INTEGRA-7.

Part EQ

Click **EQ** on a Mixer strip for the part's 3-band EQ. Tick **EQ on**, then set the **Low** (200 or 400 Hz), **Mid** (with its width, Q) and **High** (2, 4 or 8 kHz) frequencies and gains (-15 to +15 dB). The curve shows the result. **Flat** sets all three gains to 0 dB.

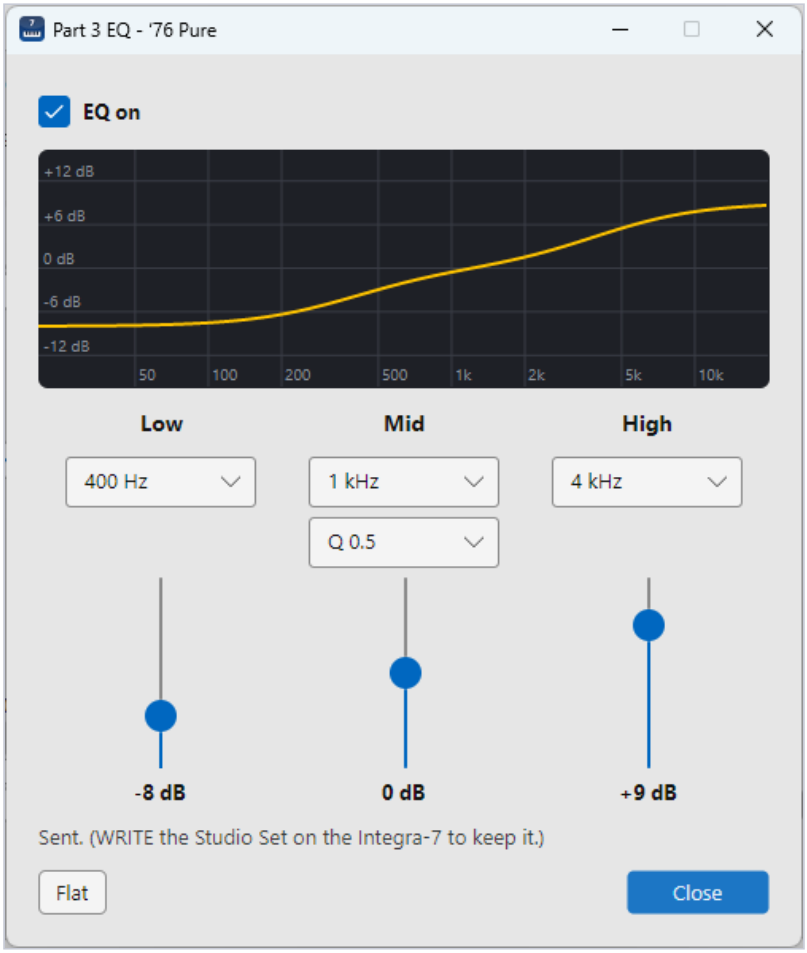


Part EQ: low cut and high boost on part 3.


7.15 Studio Set Effects and Master EQ

Click **Effects...** in the Mixer for the effects every part of the Studio Set shares:

- **Reverb** and **Chorus**: switch each on or off, and choose its **Type** and **Level**. How much of each part goes to them is set by the part's R and C knobs in the Mixer.
- **Master EQ...** opens the same kind of EQ window as Part EQ, for the whole Studio Set.

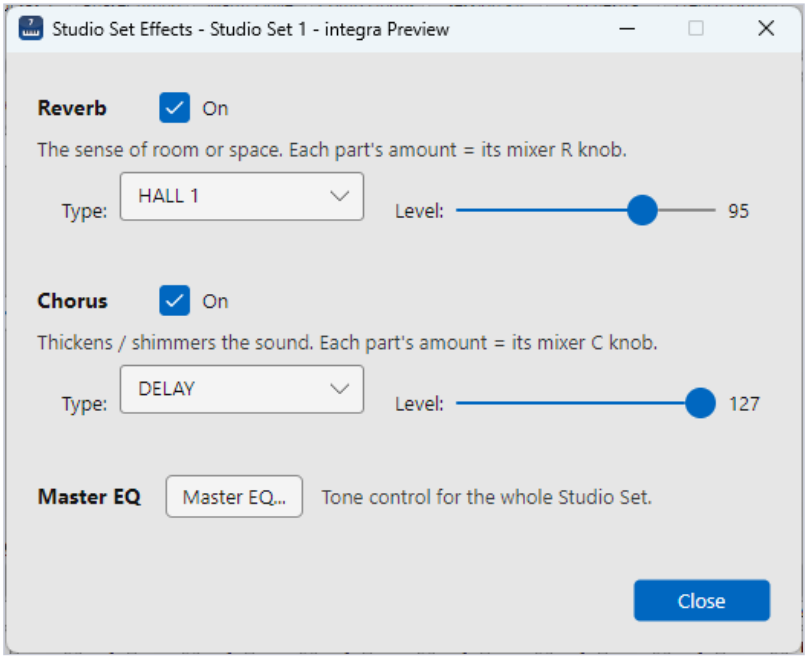


Studio Set Effects.

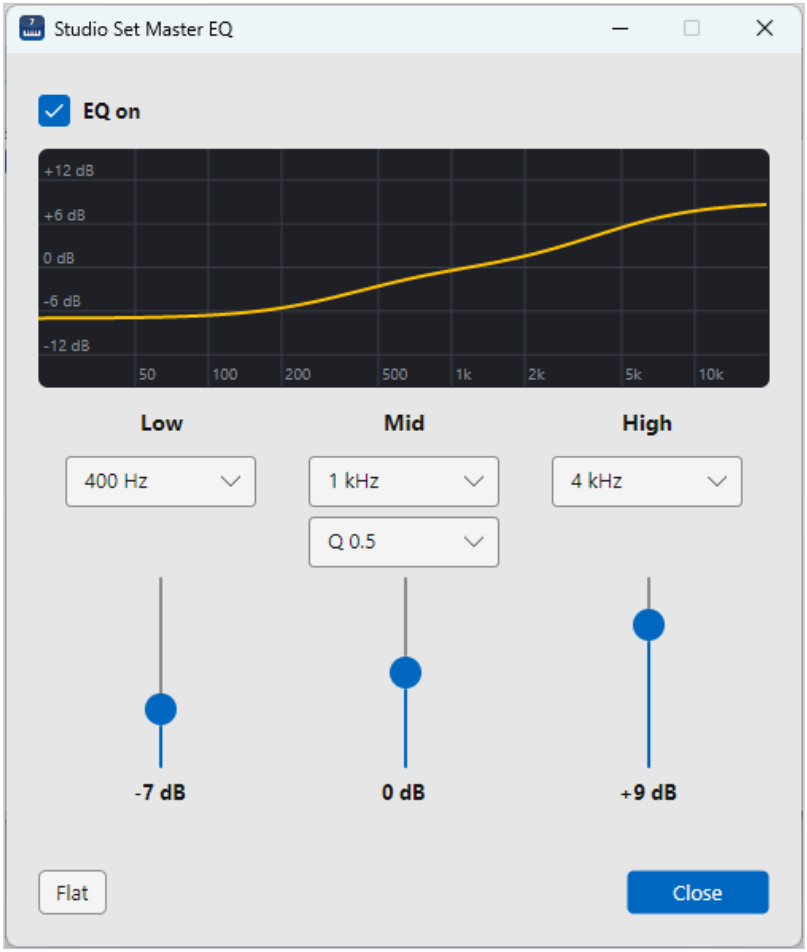

The Studio Set Master EQ.

7.16 Splits & Layers

Click **Splits & Layers** on the toolbar (or in the Mixer) to see which part plays which keys, and how hard you have to play. Each part has a bar over a keyboard showing its key range, and its velocity range on the right.

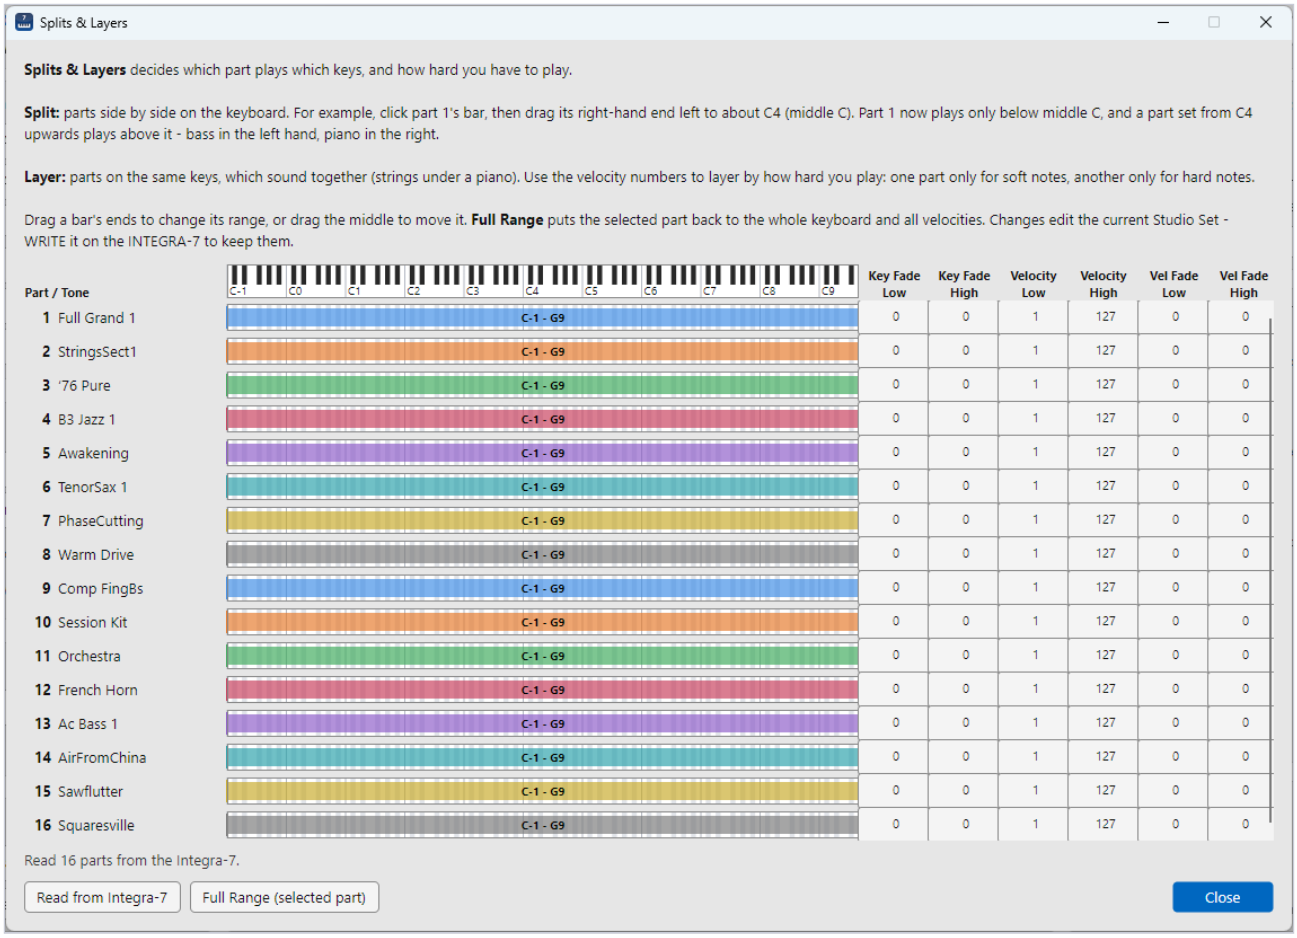


Splits & Layers: all 16 parts on the whole keyboard.

- **Split:** parts side by side on the keyboard. For example, drag the right-hand end of part 1's bar left to about C4 (middle C): part 1 now plays only below middle C, and a part set from C4 upwards plays above it, giving bass in the left hand and piano in the right.
- **Layer:** parts on the same keys, which sound together, such as strings under a piano. Use **Velocity Low** and **High** to layer by how hard you play: one part only for soft notes, another only for hard notes.
- Drag a bar's ends to change its range, or drag the middle to move it. The **Key Fade** and **Vel Fade** numbers fade a part in or out at the edges of its range instead of stopping sharply.
- **Full Range (selected part)** puts the selected part back to the whole keyboard and all velocities, and **Read from Integra-7** reads all 16 parts again.

As with the Mixer, changes edit the current Studio Set; write it on the INTEGRA-7 to keep them.

7.17 User Studio Sets

The Workbench gives you 8 **user Studio Sets**, USER1 to USER8, for your own sets. Each one is one of the INTEGRA-7's 64 Studio Set memories: by default Studio Sets 17-24. Studio Sets 1-16 are Roland's factory sets, and the Workbench never changes them. Click **User Sets...** in the Studio Set panel.

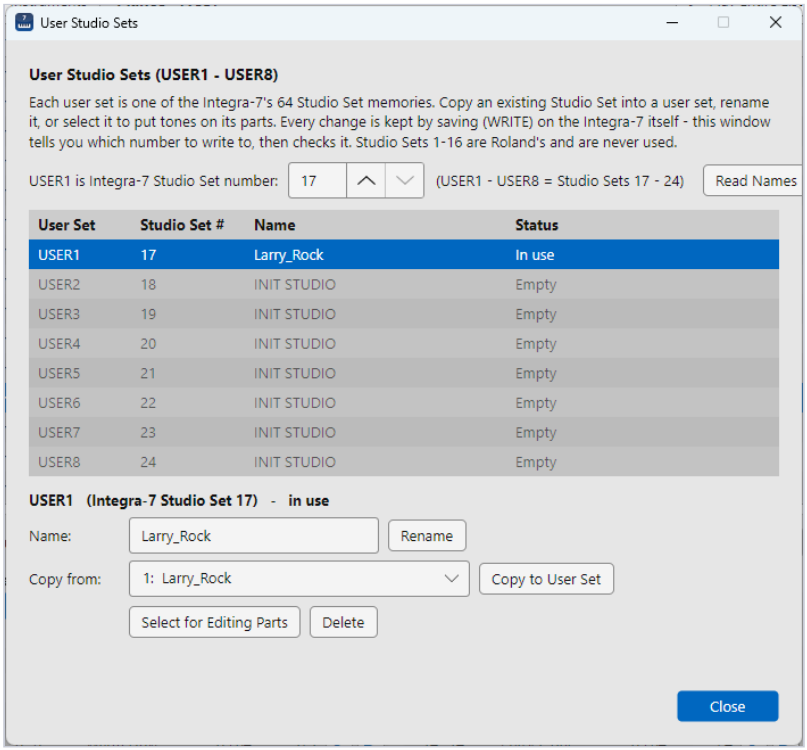

User Studio Sets: USER1 holds Larry_Rock; USER2-USER8 are empty.

- **Read Names** reads the 8 user sets' names from the INTEGRA-7. A set still called INIT STUDIO is shown as **Empty**.
- **USER1 is Integra-7 Studio Set number** moves all 8 user sets to another block of 8 memories, if 17-24 are already used for something else.
- Click a user set in the list to work on it; its name appears in the **Name** box.

Button	What it does
Copy to User Set	Choose a Studio Set in **Copy from**, type a name, and click it: the Workbench selects that Studio Set and gives it the new name, ready to be written into the user set.
Rename	Selects the user set and renames it.
Select for Editing Parts	Selects the user set and closes the window, so you can put tones on its parts in the main window (7.10) and set it up in the Mixer.
Delete	Resets the user set and names it USERn again.

Writing a user set on the INTEGRA-7

The INTEGRA-7 has no MIDI command for saving a Studio Set into its memory, so every change in this window is finished on the INTEGRA-7's own front panel. The Workbench shows the exact steps, with the name and the number filled in:


1. Hold **SHIFT** and press **EDIT** (WRITE MENU).
2. Choose **STUDIO SET WRITE** and press **ENTER**.
3. The name is already filled in: press **ENTER**.
4. Choose the Studio Set number the Workbench shows (for example **18 (USER2)**) and press **ENTER**.
5. At "Are you sure?" choose **OK** and press **ENTER**.

Then confirm in the Workbench. It reads the user set back and checks that the new name is there. If you cancel, nothing is changed in the user set.

> The same front-panel **STUDIO SET WRITE** keeps any other change to the current Studio Set: Mixer, Part Settings, EQ, effects or Splits & Layers. Write it to the Studio Set's own number to keep it there.

7.18 Backup & Restore

Click **Backup...** in the Studio Set panel to back up Studio Sets to files and restore them. A backup is a standard **.syx** file, the same format as Workbench V1.5's.

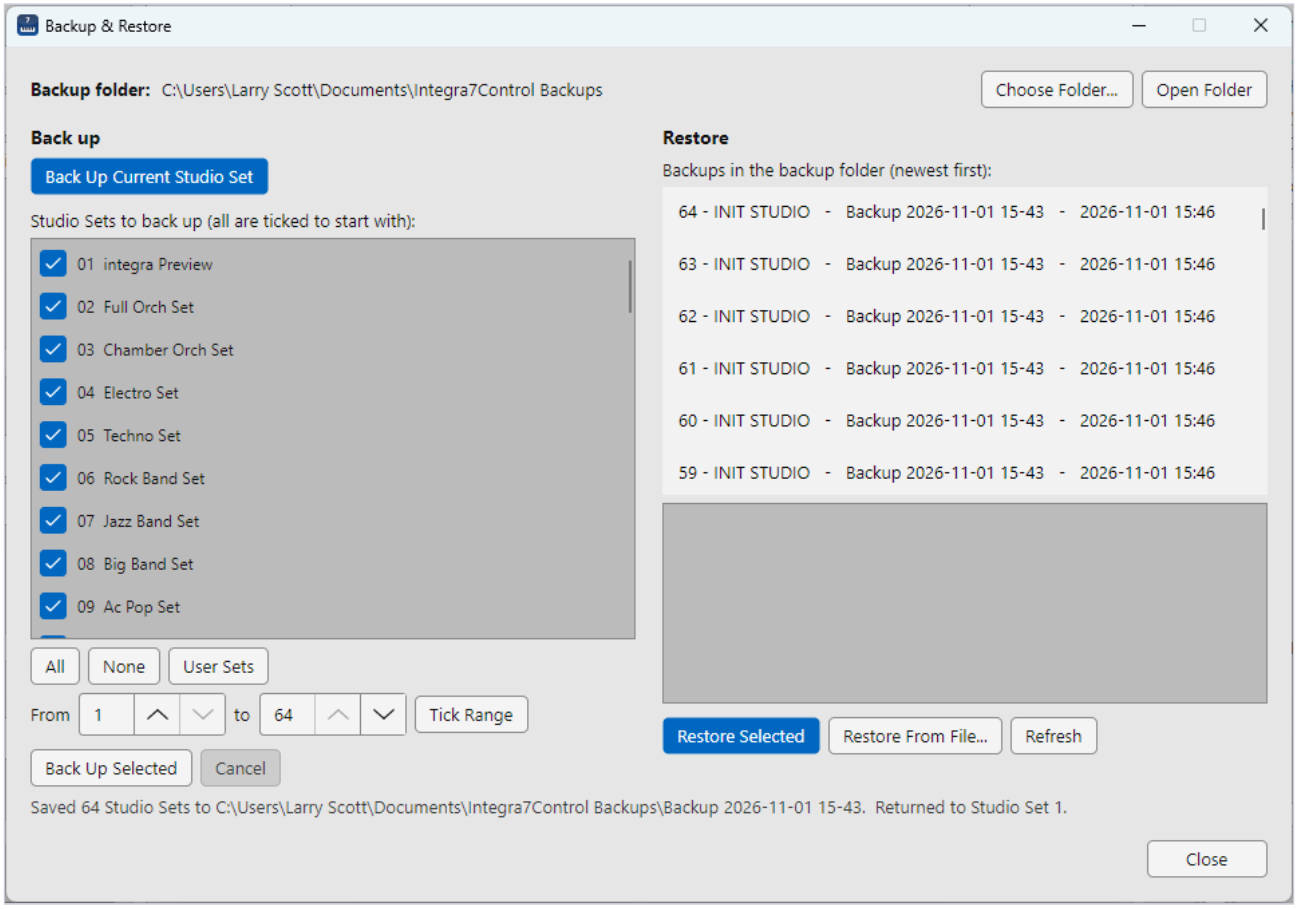

Backup & Restore after backing up all 64 Studio Sets.

The **Backup folder** is shown at the top; it starts as `Documents\Integra7Control Backups`. **Choose Folder...** picks another one, and **Open Folder** shows it in File Explorer (Finder on the Mac).

Back up

- **Back Up Current Studio Set** saves the Studio Set the INTEGRA-7 has now, including changes you haven't written yet, as one file named after the set and the date, for example *integra Preview 2026-11-01 15-52-38.syx*.
- **Back Up Selected** saves every ticked Studio Set (all 64 are ticked to start with) into a new subfolder, for example *Backup 2026-11-01 15-43*, one file per set: *01 - integra Preview.syx* to *64 - ….syx*. Use **All**, **None**, **User Sets**, or **From** / **to** with **Tick Range** to choose. The Workbench selects and reads each set in turn, then goes back to the set you were on. All 64 take about 3 minutes; **Cancel** stops it.

> Because Back Up Selected selects each Studio Set in turn, changes to the current Studio Set that you haven't written are lost. Write it first, or back it up with Back Up Current Studio Set.


Restore

The Restore list shows every backup in the backup folder, newest first. Click one to see its Studio Set name and its 16 parts below the list. **Restore Selected** loads it into the **current** Studio Set; **Restore From File...** does the same with any .syx file; **Refresh** reads the folder again.

> A restore only changes the current Studio Set on the INTEGRA-7. To keep it, write it with **STUDIO SET WRITE** (7.17) to the number you want. To undo a restore, select a Studio Set from memory again.

7.19 Sound Banks

Click **Sound Banks** on the toolbar for a list of every bank in the tone list: its sound bank name, Bank Select MSB:LSB, how many tones it has, its patch and List # ranges, the expansion it needs and the slot that expansion is in. Banks that need an expansion that isn't in a slot are dimmed.

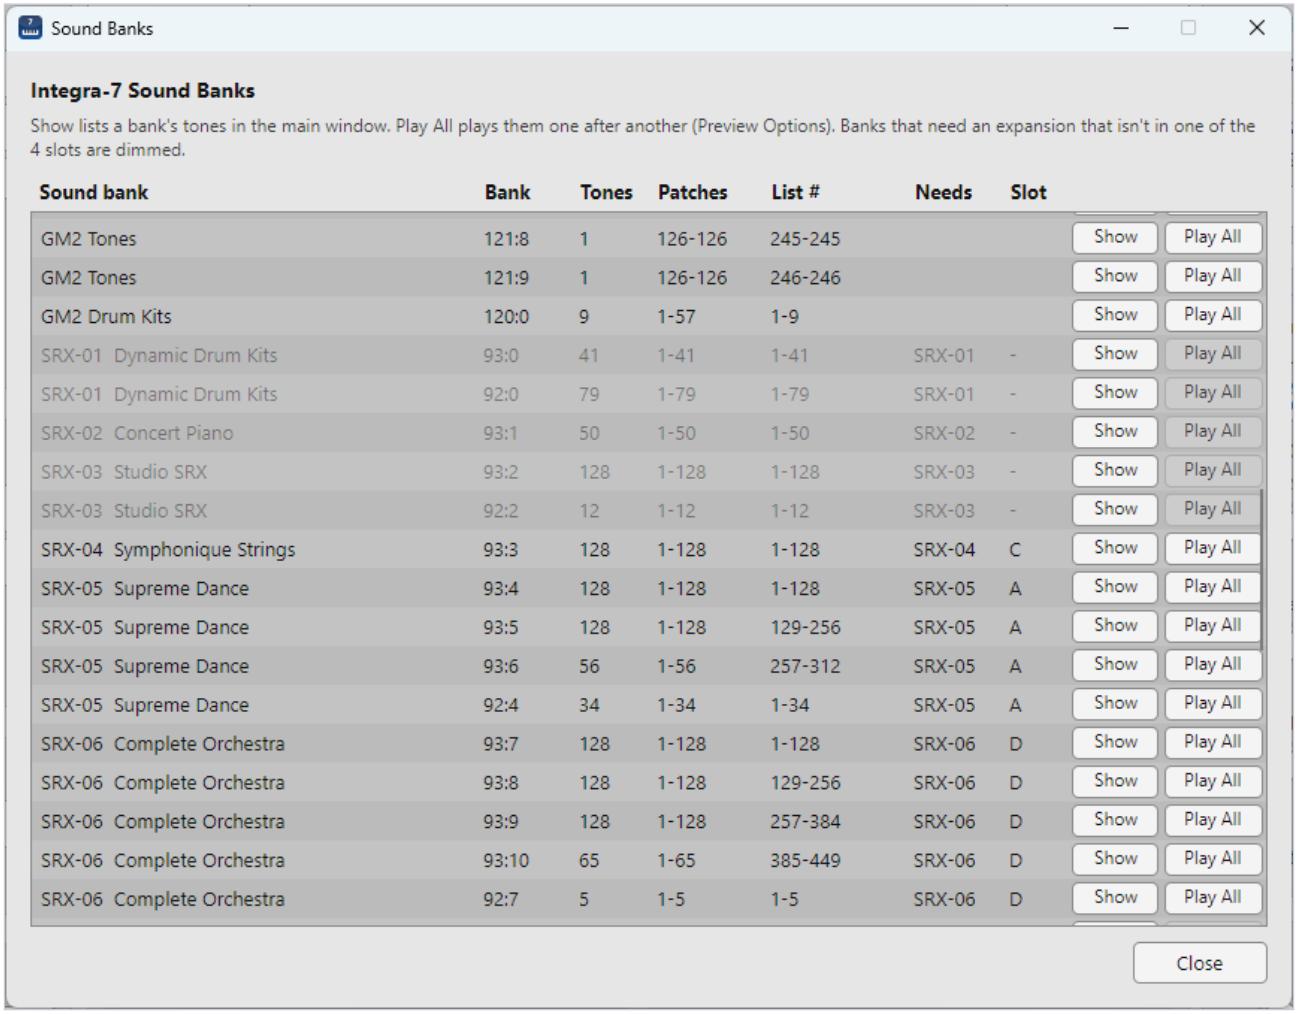


The Sound Banks window: SRX-05 Supreme Dance spread over banks 93:4, 93:5, 93:6 and 92:4.

- **Show** lists the bank's tones in the main window.
- **Play All** lists them and plays them one after another, like Play Entire List (7.9).

A bank holds at most 128 patches, so a large expansion is spread over several banks. SRX-05's 346 tones, for example, are in banks 93:4 (128), 93:5 (128) and 93:6 (56), with its drum kits in 92:4. To see a whole expansion at once, use the **Sound bank** filter in Search Options instead (7.5).

7.20 MidiControl and the I7 button

If you also use Sierra Digital Audio's **MidiControl**, its **I7** button imports the Workbench's Saved Patches (7.6) into MidiControl's patch grid. The Workbench keeps its Saved Patches in the place MidiControl looks for them, so this works with 2.0 just as it did with V1.5. Close the Workbench first, so MidiControl can use the INTEGRA-7.

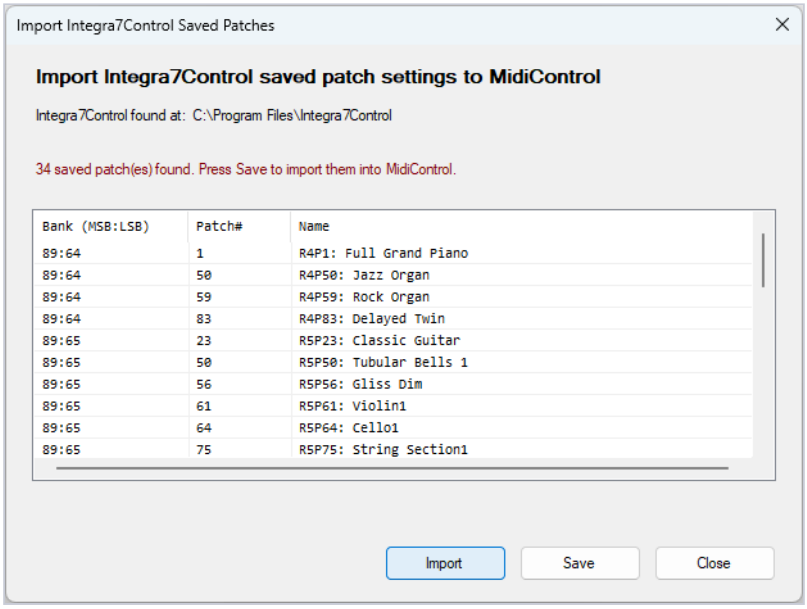


MidiControl's I7 import: it finds the Workbench and lists its saved patches.


MidiControl is a Windows program, so this applies to the Windows Workbench only.

7.21 Styles

Choose the Workbench's colours with the **Style** drop-down at the top right. There are four styles, the same as in the Integra7Control VST: **Windows 11 light**, **Light gray**, **Steel blue** and **Windows 11 dark**. They change only the colours; every control works the same in each. Every open window changes at once, and the Workbench remembers your choice. New installations start with Windows 11 light; the pictures in this guide use Light gray.

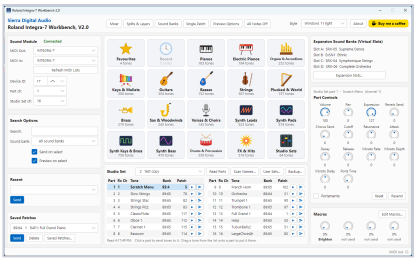

Windows 11 light

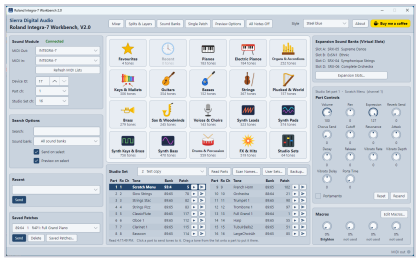

Steel blue



Windows 11 dark

8. Troubleshooting

The Sound Module panel says "Not Connected, waiting"

- Switch the INTEGRA-7 on, or check its USB cable. The Workbench connects by itself within a few seconds (5.3).
- Only one program at a time may be able to use the INTEGRA-7's USB MIDI port. Close your DAW (and the Integra7Control VST), MidiControl and any other MIDI program, then click **Refresh MIDI Lists**.
- Check Roland's driver is installed and the INTEGRA-7's **SYSTEM - USB Driver** setting is **VENDER** (Section 5).

"Connected (no MIDI In)", or the Studio Set panel and the Mixer stay empty

- The Workbench can send tones, but can't read the INTEGRA-7. Choose the INTEGRA-7 under **MIDI In** as well as MIDI Out.
- If MIDI In is chosen but nothing is read, check the **Device ID** matches the INTEGRA-7's (factory setting 17), then click **Read Parts**.

Tones are sent, but the wrong part changes (or none)

- Tones go to the part (or parts) that receive on the **Part ch**. Click the part you want in the Studio Set panel; it becomes the target part and the Part channel follows it (7.10).
- If two parts receive on the same channel, both change. To put a tone on just one of them, drag it onto that part.
- A part whose receive switch is off shows "(off)" after its channel and won't play.

Choosing a Studio Set does nothing

- The **Studio Set ch** must match the INTEGRA-7's **Studio Set Control Channel** (SYSTEM setting, factory default 16).
- Choosing the Studio Set that is already selected in the drop-down does nothing. To go back to the stored version of the current set, choose another Studio Set first, then the one you want.

The Studio Set names are wrong or missing

- Click **Scan Names...** (7.10). It reads all 64 names from the INTEGRA-7 in a minute or two.
- The Workbench shows names exactly as they are stored on the INTEGRA-7. A set renamed in the Workbench keeps its old name until you write it on the INTEGRA-7.

A tone is gray and can't be sent

- It needs an expansion that isn't in one of the four slots. Click **Expansion Slots...** and set the slots to match your INTEGRA-7, or use **Load into Integra-7** to load the expansion (7.7).

A tone is sent, but the part is silent or sounds wrong

- If the tone needs an expansion, that expansion must really be loaded on the INTEGRA-7. The slot setting only tells the Workbench.
- Check the part's level, Mute and Solo in the Mixer, the Master Level (double-click the Master fader for 127), and the octave in Part Settings and Preview Options.
- Part Controls' Volume, Expression and the offsets stay as you last sent them: click **Reset** in Part Controls (7.11).

Notes keep sounding

- Click **All Notes Off** on the toolbar. It stops the preview, turns sustain off and sends All Notes Off and All Sound Off on all 16 channels.

Changes in the Mixer or Splits & Layers are lost

- They edit the current Studio Set only. Write it on the INTEGRA-7 (7.17) before you select another Studio Set, or run a backup of selected sets.

MidiControl's I7 button doesn't find the saved patches

- Install the Workbench with its installer, into `C:\Program Files\Integra7Control`, and save or change one patch so the Workbench writes them for MidiControl. Close the Workbench before using MidiControl.

Mac: "Integra7Control can't be opened" or "is damaged"

- macOS is blocking the unsigned Workbench. It isn't damaged. Run the unblock command in 4.2, or see Appendix 1. Never click Move to Trash.

Mac: the INTEGRA-7 isn't listed, or is gray in MIDI Studio

- Install Roland's Mac driver (5.2) and check the INTEGRA-7's USB Driver setting is VENDER.
- Unplug and reconnect the INTEGRA-7, or switch it off and on after the Mac has started. After a macOS update with the INTEGRA-7 connected, reinstall Roland's driver.

Appendix 1 - Mac: allowing the unsigned Workbench

The Workbench is free, and isn't signed with a paid Apple developer certificate. When you download it, macOS marks the file as coming from the internet, and its security check, Gatekeeper, blocks it until you say you trust it. This is the Mac equivalent of Windows' "Windows protected your PC" message. It is needed once for each new version; after that the Workbench opens normally.

Without it, macOS may show a message such as *"Integra7Control" Not Opened* or *"Integra7Control" is damaged and can't be opened*. The Workbench isn't damaged; this is how macOS describes unsigned programs from the internet. Click **Done** or **Cancel**, never **Move to Trash**.



The message macOS shows before the Workbench is unblocked: click **Done**.

Method A - Terminal (recommended)

After dragging the Workbench into Applications (4.2, step 3), open Terminal and run:

```
sudo xattr -dr com.apple.quarantine /Applications/Integra7Control.app
```

Type your Mac password when asked. The command removes the "downloaded from the internet" mark from the Workbench and changes nothing else on the Mac.

Method B - System Settings

1. Double-click **Integra7Control** in Applications. When the warning appears, click **Done**.
2. Open **System Settings** → **Privacy & Security** and scroll down to **Security**. Next to the message that Integra7Control was blocked, click **Open Anyway** and enter your password.
3. Double-click **Integra7Control** again and click **Open**.

Appendix 2 - Version history

The full history is in the Workbench: **About** → **Version History**.

Version	Changes
2.0.0 November 1, 2026	A new Workbench, rebuilt from the ground up so one program runs on Windows and on Apple Silicon Macs, with the look of the Integra7Control VST. • Four styles; instrument tiles with Favourites, Recent and Studio Sets; search with several words; sound bank and category filters. • Play, Send and Save icons on every tone; Send on select and Preview on select; Play Entire List; Preview Options with the VST's phrase, a scale, piano and drum loops or your own MIDI file. • Part Controls and Macros from the VST. • Studio Set panel always on screen: click a part to target it, drag a tone onto it, play it. • Mixer showing the target part and the part playing, Master Level and Key Shift; Part EQ, Part Settings, Studio Set Effects, Master EQ, and Splits & Layers. • User Studio Sets, Backup & Restore, Sound Banks, Single Patch, Saved Patches and Expansion Slots (including loading them). • Automatic connect and reconnect; All Notes Off stops the preview first, then clears every channel. • V1.5 settings imported on the first run; settings kept in your user folder; MidiControl's I7 button keeps working.
1.5	Added the 17 ExSN2 Wood Winds tones; GM2 Castanets selects the right bank; corrected Patch and List # ranges in Sound Banks for five banks; List # always matches Roland's Sound List PDF.
1.4	Mixer Mute, Solo, sends and outputs; Splits & Layers; Part Settings; Studio Set Effects and Master EQ; Part EQ; Master Level and Key Shift; tone rename; Backup & Restore.
1.3	Play no longer asks for a name; Play and Send on each Studio Set part; Mixer Reset; a faster, safer All Notes Off; drag and drop checks the part changed.
1.2	Studio Set panel, Single Patch, Sound Banks, Expansion Slots, User Studio Sets, Saved Patches, Mixer, Preview Options, drag and drop onto a part, MIDI In and Device ID, help PDF and version history.

1.0	First release: MidiControl's Roland Integra-7 screen as a standalone Windows program.