
Chapter 2: Operating the Device

2.1 IR Remote Control

All the monitor controls can be accessed through the IR remote control. This controller has a few quick access keys for the user's convenience.



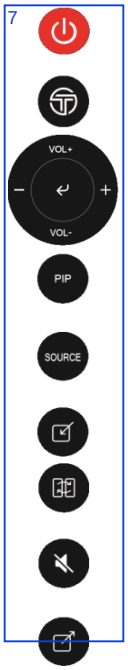

Soft Power

Quick Key – initiates Quick Menu

Central Key – Contains: Volume increase / decrease, down/ less, up/more, and enter

PIP Key – initiates the Picture in Picture Features.

Source Key – Initiates the next active video input

Zoom In Key – Initiates Zoom In

Swap Key – Initiates an image swap during a 2P mode

Mute Key – Activates or deactivates speakers

Zoom Out Key – initiates the Zoom out

2.2 On Screen Display (OSD) Navigation

When the Enter key is touched, the OSD (On Screen Display) menu will appear on the monitor screen. This menu offers the user ability to make many changes to the image. The table below shows the response after touching the different OSD icons



Icon	OSD Menu Status	Response
	Displaying	Close OSD menu
	Off	Open the Quick menu
	Displaying	Enter
	Off	Open OSD Menu
	Displaying	Move down / Decrease value
	Off	N/A
	Displaying	Move up / Increase value
	Off	Auto Adjust
	Displaying	Disable Video Image
	Off	Enable Video Image