



Message Implementation Guideline

D_TX_EE_CORNING_FIV_D10B_310_4010_OE_mp

based on

310

Freight Receipt and Invoice (Ocean)

X12 004010

Version: 1-DEV
Variant: EDIC0003861
Issue date: 06/08/2025
Author: ext.luis.bravo

New Changes Summary

No	Description of Changes	
01	Location	L1 / L1 / . 58
	Instruction Number	2
	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = PPD" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10"
	Map Instruction	"Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT"
02	Additional Info	Halted Message if condition is not meet
	Location	L1 / L1 / . 58
	Instruction Number	5
	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CPP" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10"
03	Map Instruction	"Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT"
	Additional Info	Halted Message if condition is not meet
	Location	L1 / L1 / . 16
	Instruction Number	2
04	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = PPD" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")
	Map Instruction	Hard Code "P"
	Location	L1 / L1 / . 16
	Instruction Number	5
05	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "CPP" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")
	Map Instruction	Hard Code "P"
	Location	L1 / C3 / .
	Instruction Number	2
06	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "PPD" AND SG7/MOA/C516.5025= "10"
	Map Instruction	Map first instance of SG7/MOA/C516.6345
	Location	L1 / C3 / .
	Instruction Number	5
07	Condition	If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "CPP" AND SG7/MOA/C516.5025= "10"
	Map Instruction	Map first instance of SG7/MOA/C516.6345
	Location	L1 / C3 / .
	Instruction Number	5

No = Consecutive segment number

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	ISA	M	1	0	Interchange Control Header
0000	2	GS	C	1	0	Functional Group Header
0010	3	ST	M	1	0	Transaction Set Header
0020	4	B3	M	1	0	Beginning Segment for Carrier's Invoice
0030	5	B2A	O	1	0	Set Purpose
0060	6	N9	O	15	1	Reference Identification
0060	7	N9	O	15	1	Reference Identification
0060	8	N9	O	15	1	Reference Identification
0070	9	V1	M	2	1	Vessel Identification
0110	10	C3	O	1	0	Currency
0120	11	Y2	O	10	1	Container Details
0130		N1	M	10	1	N1-N3-N4
0130	12	N1	M	1	1	Name
0150	13	N3	O	2	2	Address Information
0160	14	N4	O	1	2	Geographic Location
0130		N1	M	10	1	N1-N3
0130	15	N1	M	1	1	Name
0150	16	N3	O	2	2	Address Information
0130		N1	M	10	1	N1-N3
0130	17	N1	M	1	1	Name
0150	18	N3	O	2	2	Address Information
0130		N1	M	10	1	N1-N3
0130	19	N1	M	1	1	Name
0150	20	N3	O	2	2	Address Information
0180		R4	M	20	1	R4
0180	21	R4	M	1	1	Port or Terminal
0180		R4	M	20	1	R4-DTM
0180	22	R4	M	1	1	Port or Terminal
0190	23	DTM	O	15	2	Date/Time Reference
0180		R4	M	20	1	R4-DTM
0180	24	R4	M	1	1	Port or Terminal
0190	25	DTM	O	15	2	Date/Time Reference
0180		R4	M	20	1	R4-DTM
0180	26	R4	M	1	1	Port or Terminal
0190	27	DTM	O	15	2	Date/Time Reference
0010		LX	M	999	1	LX-N7-L0
0010	28	LX	M	1	1	Assigned Number

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group


St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Content
0020		N7	O	999	2	N7-QTY-M7
0020	29	N7	M	1	2	Equipment Details
0025	30	QTY	O	1	3	Quantity
0050	31	M7	O	5	3	Seal Numbers
0150		L0	O	120	2	L0-L5
0150	32	L0	M	1	2	Line Item - Quantity and Weight
0160	33	L5	O	999	3	Description, Marks and Numbers
0010	34	L3	M	1	0	Total Weight and Charges
0030		L1	O	20	1	L1-C3
0030	35	L1	M	1	1	Rate and Charges
0040	36	C3	O	1	2	Currency
0080	37	SE	M	1	0	Transaction Set Trailer
0000	38	GE	C	1	0	Functional Group Trailer
0000	39	IEA	M	1	0	Interchange Control Trailer

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Branching Diagram of Used Segments/Groups

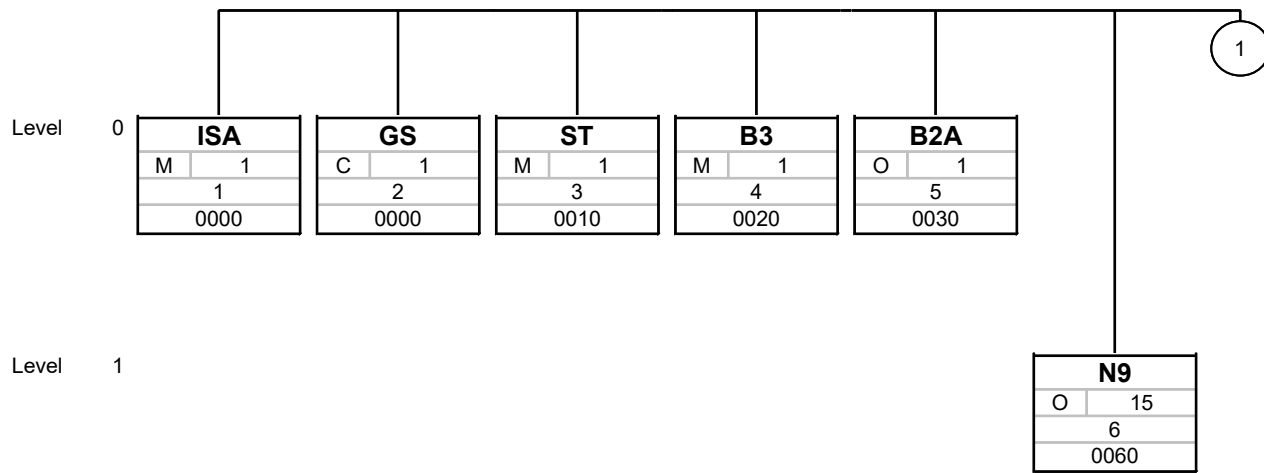

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group


No = Consecutive segment number

Counter = Counter of segment/group within the standard

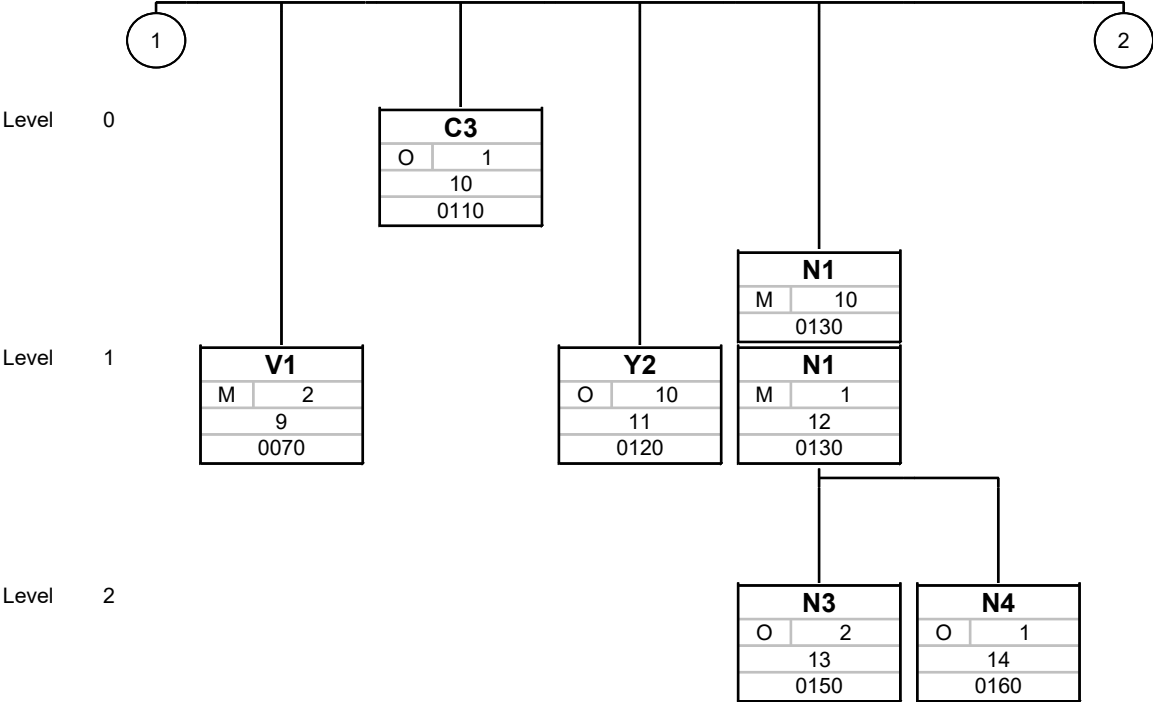


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

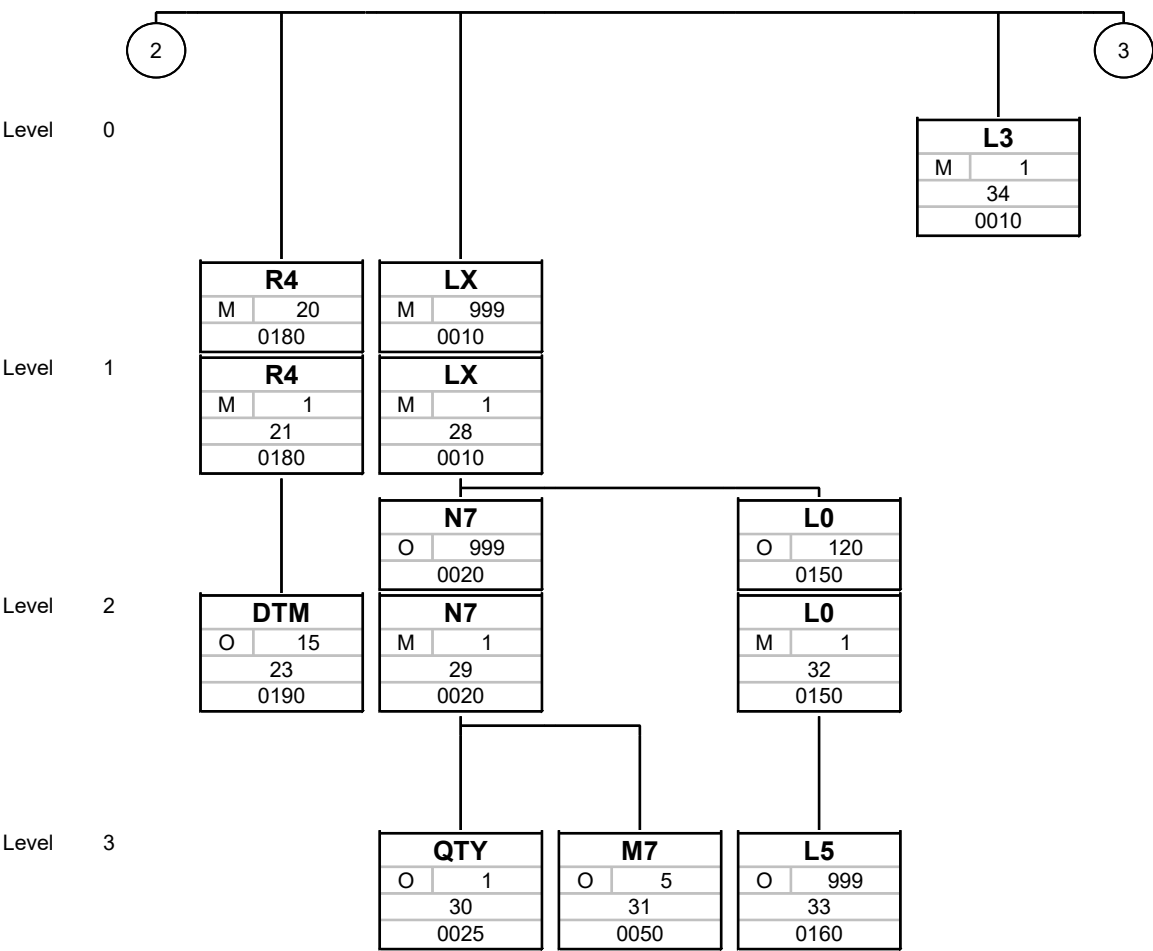

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

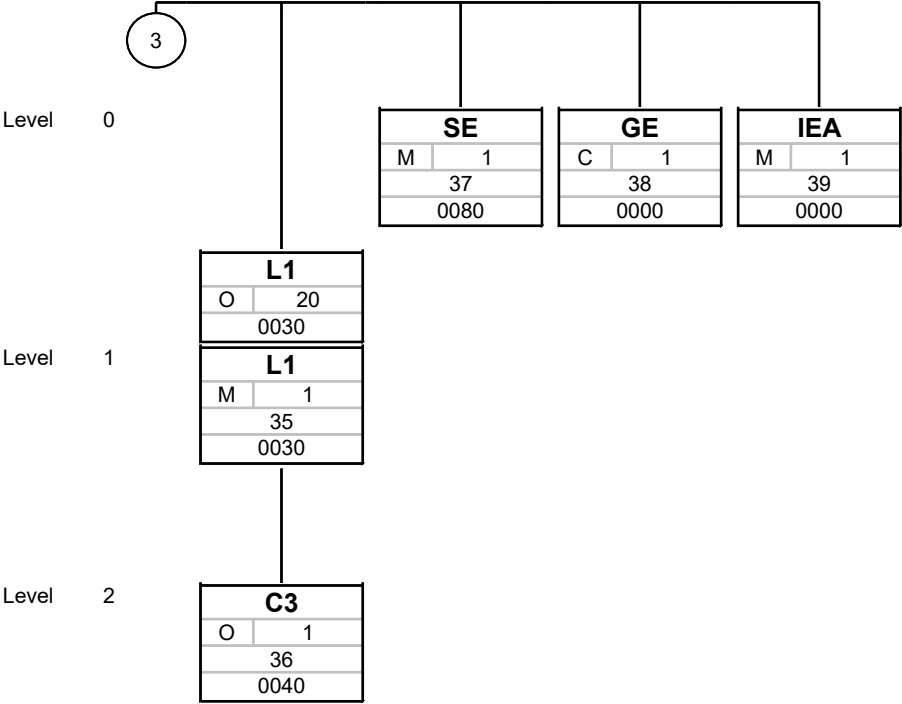

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	1	ISA	M	1	0	Interchange Control Header
------	---	------------	---	---	---	----------------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
ISA				
I01	Authorization Information Qualifier	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Harcode '00' List of valid codes 00 No Authorization Information Present (No Meaningful Information in I02)
I02	Authorization Information	M AN 10/10	M AN 10/10	Map Instructions Instruction nr 1 <i>Instruction</i> Set 10 empty spaces
I03	Security Information Qualifier	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode '00' List of valid codes 00 No Security Information Present (No Meaningful Information in I04)
I04	Security Information	M AN 10/10	M AN 10/10	Map Instructions Instruction nr 1 <i>Instruction</i> Set 10 empty spaces
I05	Interchange ID Qualifier	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'ZZ' List of valid codes ZZ Mutually Defined
I06	Interchange Sender ID	M AN 15/15	M AN 15/15	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "SCHENKEROCEAN"
I05	Interchange ID Qualifier	M ID 2/2	M ID 2/2	Map Instructions

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Instruction</i> Hardcode 'ZZ'
I07	Interchange Receiver ID	M AN 15/15	M AN 15/15	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'GTNEXUS'
I08	Interchange Date	M DT 6/6	M DT 6/6	Map Instructions Instruction nr 1 <i>Instruction</i> System date
I09	Interchange Time	M TM 4/4	M TM 4/4	Map Instructions Instruction nr 1 <i>Instruction</i> System time
I10	Interchange Control Standards Identifier	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'U' List of valid codes U U.S. EDI Community of ASC X12, TDCC, and UCS
I11	Interchange Control Version Number	M ID 5/5	M ID 5/5	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode '00401' List of valid codes 00401 Draft Standards for Trial Use Approved for Publication by ASC X12 Procedures Review Board through October 1997
I12	Interchange Control Number	M N0 9/9	M N0 9/9	Map Instructions Instruction nr 1 <i>Instruction</i> System generated
I13	Acknowledgment Requested	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode '0' List of valid codes 0 No Acknowledgment Requested
I14	Usage Indicator	M ID 1/1	M ID 1/1	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Map Instructions Instruction nr 1 <i>Condition</i> If Test <i>Instruction</i> Hardcode 'T' Instruction nr 1 <i>Condition</i> If Production <i>Instruction</i> Hardcode 'P' List of valid codes T Test Data P Production Data
I15	Component Element Separator	M AN 1/1	M AN 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode ">"

Segment Remarks:**Example:**

ISA*00* *00* *ZZ*SCHENKEROCEAN*01*GTNEXUS*250625*1024*U*00401*000000534*0*P*:

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	2	GS	C	1	0	Functional Group Header
------	---	-----------	---	---	---	-------------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GS				
479	Functional Identifier Code	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'IO' List of valid codes IO Ocean Shipment Billing Details (310, 312, 980)
142	Application Sender's Code	M AN 2/15	M AN 2/15	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "SCHENKEROCEAN"
124	Application Receiver's Code	M AN 2/15	M AN 2/15	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'GTNEXUS'
373	Date	M DT 8/8	M DT 8/8	Map Instructions Instruction nr 1 <i>Instruction</i> System date
337	Time	M TM 4/8	M TM 4/8	Map Instructions Instruction nr 1 <i>Instruction</i> System date
28	Group Control Number	M N0 1/9	M N0 1/9	Map Instructions Instruction nr 1 <i>Instruction</i> System generated
455	Responsible Agency Code	M ID 1/2	M ID 1/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode 'X' List of valid codes X Accredited Standards Committee X12
480	Version / Release / Industry Identifier Code	M AN 1/12	M AN 1/12	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode '004010'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard		Implementation	
Tag	Name	St Format	Usage / Remark
			List of valid codes 004010 Draft Standards Approved for Publication by ASC X12 Procedures Review Board through October 1997

Segment Remarks:**Example:**

GS*IO*SCHENKEROCEAN*GTNEXUS*20250625*1024*1*X*004010!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_
310_4010_OE_mp; 1-DEV;
EDIC0003861

310 / X12 004010

Issue date: 06/08/2025

Print date:

22/08/2025

Page: 13 /



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0010 3 **ST** M 1 0 Transaction Set Header

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
ST				
143	Transaction Set Identifier Code	M ID 3/3	M ID 3/3	List of valid codes 310 Freight Receipt and Invoice (Ocean)
329	Transaction Set Control Number	M AN 4/9	M AN 4/9	Map Instructions Instruction nr 1 <i>Instruction</i> Assign sequential number

Segment Remarks:**Example:**

ST*310*XXXX!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_
310_4010_OE_mp; 1-DEV;
EDIC0003861

310 / X12 004010

Issue date: 06/08/2025

Print date:

22/08/2025

Page: 14 /

Counter	No	Tag	St	MaxOcc	Level	Name
0020	4	B3	M	1	0	Beginning Segment for Carrier's Invoice

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
B3				
147	Shipment Qualifier	O ID 1/1	O ID 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "B" List of valid codes B Bill of Lading for Individual Shipment
76	Invoice Number	M AN 1/22	M AN 1/22	Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153=BH <i>Instruction</i> Map from SG3/RFF/C506.1154 <i>Add. Info</i> HALTED MESSAGE IF CONDITION IS NOT MEET
145	Shipment Identification Number	O AN 1/30	N	
146	Shipment Method of Payment	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Condition</i> If all instances of 0400/L1/16 return "E" <i>Instruction</i> Map "CC" Instruction nr 2 <i>Condition</i> If all instances of 0400/L1/16 return "P" <i>Instruction</i> Map "PO" Instruction nr 3 <i>Condition</i> Else <i>Instruction</i> Map "MX"
188	Weight Unit Code	O ID 1/1	N	
373	Date	M DT 8/8	M DT 8/8	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "19000101"
193	Net Amount Due	M N2 1/12	M N2 1/12	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "000"
202	Correction Indicator	O ID 2/2	N	
32	Delivery Date	C DT 8/8	N	
374	Date/Time Qualifier	C ID 3/3	N	
140	Standard Carrier Alpha Code	M ID 2/4	M ID 2/4	Map Instructions

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Instruction</i> Hardcode "SHKK"
373	Date	O DT 8/8	N	
375	Tariff Service Code	O ID 2/2	O ID 2/2	TBD Is required a code list for this field
335	Transportation Terms Code	O ID 3/3	N	

Segment Remarks:**Example:**

B3*B*CNSHA0001491079**11**20250806*9***XX**1A!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0030	5	B2A	O	1	0	Set Purpose

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
B2A				
353	Transaction Set Purpose Code	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "53" List of valid codes 53 Completion
346	Application Type	O ID 2/2	O ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "BL" List of valid codes BL Bill of Lading

Segment Remarks:**Example:**

B2A*53*BL!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0060 6 **N9** O 15 1 Reference Identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N9				
128	Reference Identification Qualifier	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "B" List of valid codes OB Ocean Bill of Lading
127	Reference Identification	C AN 1/30	C AN 1/30	Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153=BH <i>Instruction</i> Map from SG3/RFF/C506.1154
369	Free-form Description	C AN 1/45	N	
373	Date	O DT 8/8	N	
337	Time	C TM 4/8	N	
623	Time Code	O ID 2/2	N	
C040	Reference Identifier	O	N	
128	Reference Identification Qualifier	M ID 2/3	N	
127	Reference Identification	M AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	

Segment Remarks:**Example:**

N9*0B*CNSHA0001491079!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0060	7	N9	O	15	1	Reference Identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N9				
128	Reference Identification Qualifier	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "IV" List of valid codes IV Seller's Invoice Number
127	Reference Identification	C AN 1/30	C AN 1/30	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
369	Free-form Description	C AN 1/45	N	
373	Date	O DT 8/8	N	
337	Time	C TM 4/8	N	
623	Time Code	O ID 2/2	N	
C040	Reference Identifier	O	N	
128	Reference Identification Qualifier	M ID 2/3	N	
127	Reference Identification	M AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	

Segment Remarks:**Example:**

N9*IV*2025-0661!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0060	8	N9	O	15	1	Reference Identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N9				
128	Reference Identification Qualifier	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Condition</i> Hardcode "BN" List of valid codes BN Booking Number
127	Reference Identification	C AN 1/30	C AN 1/30	Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153=BH <i>Instruction</i> Map from SG3/RFF/C506.1154
369	Free-form Description	C AN 1/45	N	
373	Date	O DT 8/8	N	
337	Time	C TM 4/8	N	
623	Time Code	O ID 2/2	N	
C040	Reference Identifier	O	N	
128	Reference Identification Qualifier	M ID 2/3	N	
127	Reference Identification	M AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	
128	Reference Identification Qualifier	C ID 2/3	N	
127	Reference Identification	C AN 1/30	N	

Segment Remarks:**Example:**

N9*BN*X!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0070	9	V1	M	2	1	Vessel Identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
V1				
597	Vessel Code	C ID 1/8	N	
182	Vessel Name	C AN 2/28	C AN 2/28	Map Instructions Instruction nr 1 <i>Condition</i> If SG8/TDT/8051 = "20" <i>Instruction</i> Map from SG8/TDT/C222.8212
26	Country Code	O ID 2/3	N	
55	Flight/Voyage Number	O AN 2/10	O AN 2/10	Map Instructions Instruction nr 1 <i>Condition</i> If SG8/TDT/8051 = "20" <i>Instruction</i> Map from SG8/TDT/C001.8178
140	Standard Carrier Alpha Code	O ID 2/4	N	
249	Vessel Requirement Code	O ID 1/1	N	
854	Vessel Type Code	O ID 2/2	N	
897	Vessel Code Qualifier	O ID 1/1	N	
91	Transportation Method/Type Code	O ID 1/2	N	

Segment Remarks:**Example:**

V1**MAERSK ATHABASCA**519E!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0110	10	C3	O	1	0	Currency

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
C3				
100	Currency Code	M ID 3/3	M ID 3/3	
280	Exchange Rate	O R 4/10	N	
100	Currency Code	O ID 3/3	O ID 3/3	
100	Currency Code	O ID 3/3	N	

Segment Remarks:**Example:**

C3*USD**USD!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025 Print date: 22/08/2025
 Page: 22 /



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0120 11 **Y2** O 10 1 **Container Details**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
Y2				
95	Number of Containers	M N0 1/4	M N0 1/4	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
78	Container Type Request Code	O ID 1/1	N	
56	Type of Service Code	O ID 2/2	O ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
24	Equipment Type	M ID 4/4	M ID 4/4	
91	Transportation Method/Type Code	O ID 1/2	N	
177	Intermodal Service Code	O ID 1/2	N	
140	Standard Carrier Alpha Code	O ID 2/4	N	
464	Container Terms Code	O ID 3/3	N	
465	Container Terms Code Qualifier	O ID 1/1	N	
466	Total Stopoffs	O N0 1/2	N	

Segment Remarks:

Example:

Y2*9***XXXX!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025

Print date: 22/08/2025

Page: 23 /

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3-N4
0130	12	N1	M	1	1	Name

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N1				
98	Entity Identifier Code	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "BT"
93	Name	C AN 1/60	C AN 1/60	Map Instructions Instruction nr 1 <i>Condition</i> If SG2/NAD/3035 = "IV" <i>Instruction</i> Map SG2/NAD/C080.3036
66	Identification Code Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "25" List of valid codes 25 Carrier's Customer Code
67	Identification Code	C AN 2/80	C AN 2/80	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
706	Entity Relationship Code	O ID 2/2	O ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "11" List of valid codes 11 Partner
98	Entity Identifier Code	O ID 2/3	N	

Segment Remarks:**Example:**

N1*BT*CORNING INC*25*USCRG1*11!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3-N4
0150	13	N3	O	2	2	Address Information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N3				
166	Address Information	M AN 1/55	M AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> If SG2-NAD/3035 = "IV" <i>Instruction</i> MAP FROM SG2-NAD/C059-3042[1][Position 1-55] <i>Add. Info</i> REMOVE * ~ > from text
166	Address Information	O AN 1/55	N	

Segment Remarks:**Example:**

N3*RIVERFRONT PLZ 1!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3-N4
0160	14	N4	O	1	2	Geographic Location

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N4				
19	City Name	O AN 2/30	O AN 2/30	Map Instructions Instruction nr 1 <i>Condition</i> If SG2-NAD/3035 = "IV" <i>Instruction</i> MAP FROM SG2-NAD/3164[Position 1-30] <i>Add. Info</i> REMOVE * ~ > from text
156	State or Province Code	O ID 2/2	O ID 2/2	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "IV" <i>Instruction</i> Map SG12/NAD/C819.3229
116	Postal Code	O ID 3/15	O ID 3/15	Map Instructions Instruction nr 1 <i>Condition</i> SG2-NAD/3035 = "IV" <i>Instruction</i> MAP FROM SG2-NAD/3251
26	Country Code	O ID 2/3	O ID 2/3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2-NAD/3035 = "IV" <i>Instruction</i> MAP FROM SG2-NAD/3207
309	Location Qualifier	C ID 1/2	N	
310	Location Identifier	O AN 1/30	N	

Segment Remarks:**Example:**

N4*CORNING*NY*14831-000*US!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0130	15	N1	M	1	1	Name

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N1				
98	Entity Identifier Code	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "CN"
93	Name	C AN 1/60	C AN 1/60	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CN" <i>Instruction</i> Map from SG12/NAD/C080.3036 <i>Add. Info</i> Remove all *~ >
66	Identification Code Qualifier	C ID 1/2	N	
67	Identification Code	C AN 2/80	N	
706	Entity Relationship Code	O ID 2/2	N	
98	Entity Identifier Code	O ID 2/3	N	

Segment Remarks:**Example:**

N1*CN*SOLAR HEMLOCK!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0150	16	N3	O	2	2	Address Information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N3				
166	Address Information	M AN 1/55	M AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CN" <i>Instruction</i> Map SG12/NAD/C059.3042[1] Remove all * ~ > in text
166	Address Information	O AN 1/55	O AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CN" <i>Instruction</i> Map SG12/NAD/C059.3042[2] Remove all * ~ > in text

Segment Remarks:**Example:**

N3*NORTH ORR ROADHEMLOCK*PLAZA CORNING NY 14831;TIM LOFTUS!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0130	17	N1	M	1	1	Name

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N1				
98	Entity Identifier Code	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "SH" List of valid codes SH Shipper
93	Name	C AN 1/60	C AN 1/60	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CZ" <i>Instruction</i> Map from SG12/NAD/C080.3036 <i>Add. Info</i> Remove all *~ >
66	Identification Code Qualifier	C ID 1/2	N	
67	Identification Code	C AN 2/80	N	
706	Entity Relationship Code	O ID 2/2	N	
98	Entity Identifier Code	O ID 2/3	N	

Segment Remarks:**Example:**

N1*SH*SHANGHAI E-HENG IMPORT AND EXPORT!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0150	18	N3	O	2	2	Address Information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N3				
166	Address Information	M AN 1/55	M AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CZ" <i>Instruction</i> Map SG12/NAD/C059.3042[1] <i>Add. Info</i> Remove all * ~ > in text
166	Address Information	O AN 1/55	O AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "CZ" <i>Instruction</i> Map SG12/NAD/C059.3042[2] <i>Add. Info</i> Remove all * ~ > in text

Segment Remarks:**Example:**

N3*RM 1502-1503 NO 61 NANJING*ROAD E,SHANGHAI CHINA 200002;TEL 021- 6333 0192!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0130	19	N1	M	1	1	Name

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N1				
98	Entity Identifier Code	M ID 2/3	M ID 2/3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardoce "N1" List of valid codes N1 Notify Party no. 1
93	Name	C AN 1/60	C AN 1/60	Map Instructions Instruction nr 1 <i>Condition</i> If SG12/NAD/3035 = "NI" <i>Instruction</i> Map from SG12/NAD/C080.3036 <i>Add. Info</i> Remove all *~ > Instruction nr 2 <i>Condition</i> If SG12/NAD/3035 = "DP" <i>Instruction</i> Map from SG12/NAD/C080.3036 <i>Add. Info</i> Remove all *~ >
66	Identification Code Qualifier	C ID 1/2	N	
67	Identification Code	C AN 2/80	N	
706	Entity Relationship Code	O ID 2/2	N	
98	Entity Identifier Code	O ID 2/3	N	

Segment Remarks:**Example:**

N1*N1*SOLAR HEMLOCK!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130		N1	M	10	1	N1-N3
0150	20	N3	O	2	2	Address Information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N3				
166	Address Information	M AN 1/55	M AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "NI" <i>Instruction</i> Map SG12/NAD/C059.3042[1] <i>Add. Info</i> Remove all * ~ > in text
166	Address Information	O AN 1/55	O AN 1/55	Map Instructions Instruction nr 1 <i>Condition</i> if SG12/NAD/3035 = "DP" <i>Instruction</i> Map SG12/NAD/C059.3042[2] <i>Add. Info</i> Remove all * ~ > in text

Segment Remarks:**Example:**

N3*NORTH ORR ROADHEMLOCK*CORNING IMPORT TC ;CORNING IMPORT TC!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4
0180	21	R4	M	1	1	Port or Terminal

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
R4				
115	Port or Terminal Function Code	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "R" List of valid codes R Place of Receipt (Contractual)
309	Location Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> Hardcode "UN" List of valid codes UN United Nations Location Code (UNLOCODE)
310	Location Identifier	C AN 1/30	C AN 1/30	General NotesGeneral NotesGeneral NotesGeneral NotesGeneral Notes Gene (if none of these are available then the ENTIRE R4/DTM loop for "R" should not be mapped PW: Pick up Address CZ: Shipper 5: Place of receipt (Origin) 9: Port of Loading 9: Port of Loading Map Instructions Instruction nr 1 <i>Condition</i> If SG12/LOC/3227 = "184" AND SG12/NAD/3035 = "PW" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 2 <i>Condition</i> If SG12/LOC/3227 = "184" AND SG12/NAD/3035 = "CZ" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "5" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 4 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 =

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				"20")and SG10/LOC/3227= "9" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 5 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "g" <i>Instruction</i> Map from SG10/LOC/C517.3225
114	Port Name	O AN 2/24	O AN 2/24	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
26	Country Code	O ID 2/3	O ID 2/3	General NotesGeneral Notes 5 Place of receipt (Origin) 9: Port of Loading 9: Port of Loading Map Instructions Instruction nr 1 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "5" <i>Instruction</i> Map from SG10/LOC/C517.3224 Instruction nr 2 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "9" <i>Instruction</i> Map from SG10/LOC/C517.3224 Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "9" <i>Instruction</i> Map from SG10/LOC/C517.3224
174	Terminal Name	O AN 2/30	N	
113	Pier Number	O AN 1/4	N	
156	State or Province Code	O ID 2/2	N	

Segment Remarks:**Example:**

R4*R*UN*CNSHA*Shanghai*CN!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0180	22	R4	M	1	1	Port or Terminal

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
R4				
115	Port or Terminal Function Code	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "9" <i>Instruction</i> Hardcode 'L' Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "9" <i>Instruction</i> Hardcode 'L' List of valid codes L Port of Loading (Operational) L Port of Loading (Operational)
309	Location Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> Hardcode "UN" List of valid codes UN United Nations Location Code (UNLOCODE)
310	Location Identifier	C AN 1/30	C AN 1/30	General Notes (ABOVE is ensuring the leg mode matches the main transport mode ... ie only looking for SEA legs if SEA main transport) EXAMPLE TDT+20+Sea+1 TDT+22+Sea+1 Map Instructions Instruction nr 1 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "9" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "9" <i>Instruction</i> Map from SG10/LOC/C517.3225

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
114	Port Name	O AN 2/24	O AN 2/24	Map Instructions Instruction nr 1 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "9" <i>Instruction</i> Map from SG10/LOC/C517.3224 Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "9" <i>Instruction</i> Map from SG10/LOC/C517.3224
26	Country Code	O ID 2/3	O ID 2/3	Map Instructions Instruction nr 1 <i>Condition</i> First occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "9" <i>Instruction</i> Map from SG10/LOC/C517.3225 "Take first two characters" Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "9" <i>Instruction</i> Map from SG10/LOC/C517.3225 "Take first two characters"
174	Terminal Name	O AN 2/30	N	
113	Pier Number	O AN 1/4	N	
156	State or Province Code	O ID 2/2	N	

Segment Remarks:**Example:**

R4*L*UN*X*XX*AD!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0190	23	DTM	O	15	2	Date/Time Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
374	Date/Time Qualifier	M ID 3/3	M ID 3/3	
373	Date	C DT 8/8	C DT 8/8	
337	Time	C TM 4/8	C TM 4/8	
623	Time Code	O ID 2/2	O ID 2/2	
1250	Date Time Period Format Qualifier	C ID 2/3	N	
1251	Date Time Period	C AN 1/35	N	

Segment Remarks:**Example:**

DTM*001*20250806*2158*01!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0180	24	R4	M	1	1	Port or Terminal

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
R4				
115	Port or Terminal Function Code	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "Z11" <i>Instruction</i> Hardcode 'D' Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Hardcode 'D' List of valid codes D Port of Discharge (Operational) D Port of Discharge (Operational)
309	Location Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> Hardcode "UN" List of valid codes UN United Nations Location Code (UNLOCODE)
310	Location Identifier	C AN 1/30	C AN 1/30	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225
114	Port Name	O AN 2/24	O AN 2/24	Map Instructions Instruction nr 1

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				<i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227= "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3224 Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3224
26	Country Code	O ID 2/3	O ID 2/3	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and <i>Instruction</i> Map from SG10/LOC/C517.3225 "Take first two characters" Instruction nr 2 <i>Condition</i> SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225 "Take first two characters"
174	Terminal Name	O AN 2/30	N	
113	Pier Number	O AN 1/4	N	
156	State or Province Code	O ID 2/2	N	

Segment Remarks:**Example:**

R4*D*UN*X*XX*AD!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0190	25	DTM	O	15	2	Date/Time Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
374	Date/Time Qualifier	M ID 3/3	M ID 3/3	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Hardcode"140" Instruction nr 2 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> Hardcode"139" Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="178" <i>Instruction</i> Hardcode"140" Instruction nr 4 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="232" <i>Instruction</i> Hardcode"139"
373	Date	C DT 8/8	C DT 8/8	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Map SG8/ DTM/C507.2380 (CCYYMMDD) Instruction nr 2 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> Map SG8/ DTM/C507.2380 (CCYYMMDD) Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="178" <i>Instruction</i> Map SG8/ DTM/C507.2380 (CCYYMMDD) Instruction nr 4

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				<i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="232" <i>Instruction</i> Map SG8/ DTM/C507.2380 (CCYYMMDD)
337	Time	C TM 4/8	C TM 4/8	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Map SG8/ DTM/C507.2380 (HHMM) Instruction nr 2 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> SG8/ Map DTM/C507.2380 (HHMM) Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="178" <i>Instruction</i> SG8/Map DTM/C507.2380 (HHMM) Instruction nr 4 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005="232" <i>Instruction</i> Map SG8/ DTM/C507.2380 (HHMM)
623	Time Code	O ID 2/2	O ID 2/2	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "LT" List of valid codes LT Local Time
1250	Date Time Period Format Qualifier	C ID 2/3	N	
1251	Date Time Period	C AN 1/35	N	

Segment Remarks:**Example:**

DTM*001*20250806*2158*LT!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0180	26	R4	M	1	1	Port or Terminal

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
R4				
115	Port or Terminal Function Code	M ID 1/1	M ID 1/1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "E" List of valid codes E Place of Delivery (Contractual)
309	Location Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> Hardcode "UN" List of valid codes UN United Nations Location Code (UNLOCODE)
310	Location Identifier	C AN 1/30	C AN 1/30	Map Instructions Instruction nr 1 <i>Condition</i> If SG12/LOC/3227 = "184" AND SG12/NAD/3035 = "DP" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 2 <i>Condition</i> If SG12/LOC/3227 = "184" AND SG12/NAD/3035 = "CN" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" AND SG10/LOC/3227 = "8" <i>Instruction</i> Map from SG10/LOC/C517.3225 Instruction nr 4 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227="Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225
114	Port Name	O AN 2/24	O AN 2/24	Map Instructions Instruction nr 2 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227="Z11" <i>Instruction</i> Map from SG10/LOC/C517.3224 Instruction nr 3 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3224
26	Country Code	O ID 2/3	O ID 2/3	Map Instructions Instruction nr 1 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" (ie we skip the main transport TDT) and where SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20")and SG10/LOC/3227="Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225. "Take first two characters" Instruction nr 2 <i>Condition</i> If SG8/TDT/8051 = "20" and SG10/LOC/3227 = "Z11" <i>Instruction</i> Map from SG10/LOC/C517.3225. "Take first two characters"
174	Terminal Name	O AN 2/30	N	
113	Pier Number	O AN 1/4	N	
156	State or Province Code	O ID 2/2	N	

Segment Remarks:**Example:**

R4*E*UN*X*XX*AD!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0180		R4	M	20	1	R4-DTM
0190	27	DTM	O	15	2	Date/Time Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
374	Date/Time Qualifier	M ID 3/3	M ID 3/3	Map Instructions Instruction nr 1 <i>Condition</i> If SG0 DTM/C507.2005=35 <i>Instruction</i> Hardcode"140" Instruction nr 2 <i>Condition</i> If SG0/DTM/C507.2005=ZED <i>Instruction</i> Hardcode"139" Instruction nr 3 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Hardcode"140" Instruction nr 4 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> Hardcode"139" Instruction nr 5 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=178 <i>Instruction</i> Hardcode"140" Instruction nr 6 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=232 <i>Instruction</i> Hardcode"139"
373	Date	C DT 8/8	C DT 8/8	Map Instructions Instruction nr 1 <i>Condition</i> IfSG0/ DTM/C507.2005=35 <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG0/DTM/C507.2380 Instruction nr 2 <i>Condition</i> If SG0/DTM/C507.2005=17 <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG0/ DTM/C507.2380 Instruction nr 3 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG8/DTM/C507.2380 Instruction nr 4 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG8/DTM/C507.2380 Instruction nr 5 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=178 <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG10/DTM/C507.2380 Instruction nr 6 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=232 <i>Instruction</i> Map 8 characters from left (map only CCYYMMDD) from SG8/DTM/C507.2380
337	Time	C TM 4/8	C TM 4/8	Map Instructions Instruction nr 1 <i>Condition</i> If SG0/DTM/C507.2005=35 <i>Instruction</i> Map SG0/DTM/C507.2380 (HHMM) Instruction nr 2 <i>Condition</i> If SG0/DTM/C507.2005=17 <i>Instruction</i> Map SG0/DTM/C507.2380 (HHMM) Instruction nr 3 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "178" <i>Instruction</i> Map SG8/DTM/C507.2380 (HHMM) Instruction nr 4 <i>Condition</i> Last occurrence where SG8/TDT/8051 <> "20" and SG8/TDT/C220.8067 = (SG8/TDT/C220.8067 where SG8/TDT/8051 = "20") and if SG8/DTM/C507.2005 = "232" <i>Instruction</i> Map SG8/DTM/C507.2380 (HHMM) Instruction nr 5 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=178 <i>Instruction</i> Map SG8/DTM/C507.2380 (HHMM) Instruction nr 6 <i>Condition</i> If SG8/TDT/8051 = "20" and SG8/DTM/C507.2005=232 <i>Instruction</i> Map SG8/DTM/C507.2380 (HHMM)
623	Time Code	O ID 2/2	O ID 2/2	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "LT"
1250	Date Time Period Format Qualifier	C ID 2/3	N	
1251	Date Time Period	C AN 1/35	N	

Segment Remarks:**Example:**

DTM*001*20250806*2158*01!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0010		LX	M	999	1	LX-N7-L0
0010	28	LX	M	1	1	Assigned Number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LX				
554	Assigned Number	M N0 1/6	M N0 1/6	Map Instructions Instruction nr 1 <i>Instruction</i> Make a LX loop for each occurrence of SG38/EQD/ C237.8260

Segment Remarks:**Example:**

LX*1!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020		N7	O	999	2	N7-QTY-M7
0020	29	N7	M	1	2	Equipment Details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
N7				
206	Equipment Initial	O AN 1/4	O AN 1/4	Map Instructions Instruction nr 1 <i>Condition</i> If SG38/EQD/8053="CN" <i>Instruction</i> Map 4 characters from left from SG38/EQD/C237.8260
207	Equipment Number	M AN 1/10	M AN 1/10	Map Instructions Instruction nr 1 <i>Condition</i> if data found in SG38/EQD/C237.8260 <i>Instruction</i> Map SG38/EQD/C237.8260 Positions 5-n
81	Weight	C R 1/10	C R 1/10	Map Instructions Instruction nr 1 <i>Instruction</i> MAP SUM ALL OCURRENCES SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG21-MEA/6311 = "WT" and SG21-MEA/C502-6313 = "AAD" and SG21/MEA/C174.6411= KGM (for all occurrences with the same SG38-EQD/C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
187	Weight Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> if SG21/MEA/6311 = "WT" and SG21/MEA/C502.6313 = "AAD" and SG21/MEA/C174.6411= KGM <i>Instruction</i> Hardcode "G" List of valid codes G Gross Weight
167	Tare Weight	C N0 3/8	N	
232	Weight Allowance	O N0 2/6	N	
205	Dunnage	O N0 1/6	N	
183	Volume	C R 1/8	C R 1/8	Map Instructions Instruction nr 1 <i>Instruction</i> Map SUM all occurrences SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG21-

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				MEA/6311 = "VOL" and SG21/MEA/C174.6411= MTQ (for all occurrences with the same SG38-EQD/ C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260)) Instruction nr 2 <i>Condition</i> <i>Instruction</i> Map SUM all occurrences SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/ C237-8260 = SG30/SGP/C237-8260 AND SG21-MEA/6311 = "WT" and SG21/MEA/C174.6411= MTQ (for all occurrences with the same SG38-EQD/ C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
184	Volume Unit Qualifier	C ID 1/1	C ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If SG21/MEA/6311 = "VOL" and SG21/MEA/C174. 6411 = "MTQ" <i>Instruction</i> Hardcode"X" Instruction nr 2 <i>Condition</i> if SG27/MEA/6311 = "WT" and SG27/MEA/C174. 6411 = "MTQ" <i>Instruction</i> Hardcode"X" List of valid codes X Cubic Meters
102	Ownership Code	O ID 1/1	N	
40	Equipment Description Code	O ID 2/2	N	
140	Standard Carrier Alpha Code	O ID 2/4	N	
319	Temperature Control	O AN 3/6	N	
219	Position	O AN 1/3	N	
567	Equipment Length	O N0 4/5	N	
571	Tare Qualifier Code	C ID 1/1	N	
188	Weight Unit Code	O ID 1/1	O ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> if SG21/MEA/6311 = "WT" and SG21/MEA/C502. 6313 = "AAD" and SG21/MEA/C174.6411= KGM <i>Instruction</i> Hardcode"K" List of valid codes K Kilograms
761	Equipment Number Check Digit	O N0 1/1	O N0 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If SG38/EQD/8053="CN" <i>Instruction</i> map last character from SG38/EQD/C237.8260

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Make a N7 loop for each occurrence of SG38/ EQD/C237.8260
56	Type of Service Code	O ID 2/2	N	
65	Height	O R 1/8	N	
189	Width	O R 1/8	N	
24	Equipment Type	O ID 4/4	O ID 4/4	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
140	Standard Carrier Alpha Code	O ID 2/4	N	
301	Car Type Code	O ID 1/4	N	

Segment Remarks:**Example:**

N7*HAMU*315893*3212.200*G****17.770*X*****K*0****45GP!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025 Print date: 22/08/2025
 Page: 50 /

Counter	No	Tag	St	MaxOcc	Level	Name
0020		N7	O	999	2	N7-QTY-M7
0025	30	QTY	O	1	3	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
673	Quantity Qualifier	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Condition</i> IF SG19/GID/C213.7224 is available <i>Instruction</i> Hardcode"39" List of valid codes 39 Shipped Quantity
380	Quantity	C R 1/15	C R 1/15	Map Instructions Instruction nr 1 <i>Condition</i> <i>Instruction</i> Map sum all occurrences SG19/GID/C213.7224 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 (for all occurrences with the same SG38-EQD/C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
C001	Composite Unit of Measure	O	O	
355	Unit or Basis for Measurement Code	M ID 2/2	M ID 2/2	Map Instructions Instruction nr 1 <i>Condition</i> If SG19/GID/C213.7224 is available <i>Instruction</i> Hardcode "PC" List of valid codes PC Piece
1018	Exponent	O R 1/15	N	
649	Multiplier	O R 1/10	N	
355	Unit or Basis for Measurement Code	O ID 2/2	N	
1018	Exponent	O R 1/15	N	
649	Multiplier	O R 1/10	N	
355	Unit or Basis for Measurement Code	O ID 2/2	N	
1018	Exponent	O R 1/15	N	
649	Multiplier	O R 1/10	N	
355	Unit or Basis for Measurement Code	O ID 2/2	N	
1018	Exponent	O R 1/15	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
649	Multiplier	O R 1/10	N	
355	Unit or Basis for Measurement Code	O ID 2/2	N	
1018	Exponent	O R 1/15	N	
649	Multiplier	O R 1/10	N	
61	Free-Form Message	C AN 1/30	N	

Segment Remarks:**Example:**

QTY*39*9*PC!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025 Print date: 22/08/2025
 Page: 52 /

Counter	No	Tag	St	MaxOcc	Level	Name
0020		N7	O	999	2	N7-QTY-M7
0050	31	M7	O	5	3	Seal Numbers

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
M7				
225	Seal Number	M AN 2/15	M AN 2/15	Map Instructions Instruction nr 1 <i>Condition</i> If data found in SG38/SEL/9308 <i>Instruction</i> Map from SG38/SEL/9308
225	Seal Number	O AN 2/15	N	
225	Seal Number	O AN 2/15	N	
225	Seal Number	O AN 2/15	N	
98	Entity Identifier Code	O ID 2/3	N	

Segment Remarks:**Example:**

M7*XX!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0150		L0	O	120	2	L0-L5
0150	32	L0	M	1	2	Line Item - Quantity and Weight

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
L0				
213	Lading Line Item Number	O N0 1/3	N	
220	Billed/Rated-as Quantity	C R 1/11	N	
221	Billed/Rated-as Qualifier	C ID 2/2	N	
81	Weight	C R 1/10	C R 1/10	Map Instructions Instruction nr 1 <i>Instruction</i> Map SUM all occurrences SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG21-MEA/6311 = "WT" and SG21-MEA/C502-6313 = "AAB" and SG21/MEA/C174.6411= KGM (for all occurrences with the same SG38-EQD/C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
187	Weight Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> If SG21-MEA/6311 = "WT" and SG21-MEA/C502-6313 = "AAB" and SG21/MEA/C174.6411= KGM <i>Instruction</i> Map "G" List of valid codes G Gross Weight
183	Volume	C R 1/8	C R 1/8	DecimalsDecimals real number, 3 decimals real number, 3 decimals Map Instructions Instruction nr 1 <i>Condition</i> <i>Instruction</i> Map Sum all occurrences SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG21-MEA/6311 = "VOL" and SG21/MEA/C174.6411= MTQ (for all occurrences with the same SG38-EQD/C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260)) Instruction nr 2 <i>Instruction</i> Map sum all SG21-MEA/C174-6314 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG21-MEA/6311 =

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				"WT" and SG21/MEA/C174.6411= MTQ (for all occurrences with the same SG38-EQD/ C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
184	Volume Unit Qualifier	C ID 1/1	C ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If SG21-MEA/6311 = "VOL" and SG21/MEA/C174. 6411= MTQ <i>Instruction</i> Hardcode"X" Instruction nr 2 <i>Condition</i> If SG21-MEA/6311 = "WT" and SG21/MEA/C174. 6411= MTQ <i>Instruction</i> Hardcode"X" List of valid codes X Cubic Meters
80	Lading Quantity	C N0 1/7	C N0 1/7	Map Instructions Instruction nr 1 <i>Instruction</i> Map sum all occurrences SG19/GID/C213.7224 where SG38-EQD/8053 = "CN" AND SG38-EQD/ C237-8260 = SG30/SGP/C237-8260 (for all occurrences with the same SG38-EQD/ C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260))
211	Packaging Form Code	C ID 3/3	C ID 3/3	Map Instructions Instruction nr 1 <i>Condition</i> If Map SG19/GID/C213.7224 <i>Instruction</i> Map "PCS" List of valid codes PCS Pieces
458	Dunnage Description	O AN 2/25	N	
188	Weight Unit Code	O ID 1/1	O ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If SG21-MEA/6311 = "WT" and SG21-MEA/C502- 6313 = "AAB" and SG21/MEA/C174.6411= KGM <i>Instruction</i> Map "K" List of valid codes K Kilograms
56	Type of Service Code	O ID 2/2	N	
380	Quantity	C R 1/15	N	
211	Packaging Form Code	O ID 3/3	N	
1073	Yes/No Condition or Response Code	C ID 1/1	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Segment Remarks:

Example:

L0****9*G*9*X**PCS**K!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0150		L0	O	120	2	L0-L5
0160	33	L5	O	999	3	Description, Marks and Numbers

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
L5				
213	Lading Line Item Number	O N0 1/3	N	
79	Lading Description	O AN 1/50	O AN 1/50	General Notes L5 for each LX LOOP Map Instructions Instruction nr 1 <i>Instruction</i> Map sum all occurrences SG19 FTX /C108.4440 where SG38-EQD/8053 = "CN" AND SG38-EQD/C237-8260 = SG30/SGP/C237-8260 AND SG19 FTX/ 4451 = "AAA" (for all occurrences with the same SG38-EQD/C237-8260 (one at GID loop) as the container being mapped in N7 (SG38-EQD/C237-8260)) REMOVE all * > : ~ and truncate to maximum length
22	Commodity Code	C AN 1/30	N	
23	Commodity Code Qualifier	C ID 1/1	N	
103	Packaging Code	O AN 3/5	N	
87	Marks and Numbers	C AN 1/48	N	
88	Marks and Numbers Qualifier	O ID 1/2	N	
23	Commodity Code Qualifier	C ID 1/1	N	
22	Commodity Code	C AN 1/30	N	
595	Compartment ID Code	O ID 1/1	N	

Segment Remarks:**Example:**

L5**Heavy-duty workbench Tel/mobile# 607-684-81!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0010 34 **L3** M 1 0 **Total Weight and Charges**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
L3				
81	Weight	C R 1/10	C R 1/10	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "7" <i>Instruction</i> Map from CNT/C270.6066
187	Weight Qualifier	C ID 1/2	C ID 1/2	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "7" <i>Instruction</i> Hardcode"G" List of valid codes G Gross Weight
60	Freight Rate	C R 1/9	N	
122	Rate/Value Qualifier	C ID 2/2	N	
58	Charge	O N2 1/12	O N2 1/12	General Notes SHW: Show Collect Charges, AG: Overseas Agent PPD: Show prepaid Charges, OY: Local Client ALL: Prepaid and Collect Charges (ONLY COLLECT CHARGES AG: Overseas Agent) CCL: Show Original As Agreed & Copy with Collect Charges, AG: Overseas Agent CPP: Show Original As Agreed & Copy with Prepaid Charges, OY: Local Client (ONLY COLLECT CHARGES AG: Overseas Agent) CAL: Show Original As Agreed & Copy with Prepaid Charges and Collect Charges (ONLY COLLECT CHARGES AG: Overseas Agent) "NON" : Non charges, (ONLY COLLECT CHARGES AG: Overseas Agent) "AGR" : Show "As Agreed" in the charges section, (ONLY COLLECT CHARGES AG: Overseas Agent) Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = SHW" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map SUM of SG7/MOA/C516.5004 (where the condition is met) Instruction nr 2 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = PPD" and SG7/FTX/C108.4440(4)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_310_4010_OE_mp; 1-DEV;
 EDIC0003861

310 / X12 004010

Issue date: 06/08/2025

Print date:

22/08/2025

Page: 58 /

Standard		Implementation	
Tag	Name	St Format	Usage / Remark
			WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map "0" Instruction nr 3 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = SHW" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map SUM of SG7/MOA/C516.5004 (where the condition is met) Instruction nr 4 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CCL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map SUM of SG7/MOA/C516.5004 (where the condition is met) Instruction nr 5 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CPP" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map "0" Instruction nr 6 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CCL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> Map SUM of SG7/MOA/C516.5004 (where the condition is met) Instruction nr 7 <i>Condition</i> 1. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" 2. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 != "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> 1. Map SUM of SG7/MOA/C516.5004 (where the condition is met) 2. Map '0'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 8 <i>Condition</i> 1. If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C506.1154 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" 2. If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C506.1154 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 != "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> 1. Map SUM of SG7/MOA/C516.5004 (where the condition is met) 2. Map '0'
191	Advances	O N2 1/9	N	
117	Prepaid Amount	O N2 1/9	N	
150	Special Charge or Allowance Code	O ID 3/3	N	
183	Volume	C R 1/8	C R 1/8	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "15" <i>Instruction</i> Map from CNT/C270.6066
184	Volume Unit Qualifier	C ID 1/1	C ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "15" <i>Instruction</i> Hardcode"X" List of valid codes X Cubic Meters
80	Lading Quantity	O N0 1/7	O N0 1/7	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "Z11" <i>Instruction</i> Map from CNT/C270.6066
188	Weight Unit Code	O ID 1/1	O ID 1/1	Map Instructions Instruction nr 1 <i>Condition</i> If CNT/C270.6069 = "7" <i>Instruction</i> Hardcode"K" List of valid codes K Kilograms
171	Tariff Number	O AN 1/7	N	
74	Declared Value	C N2 2/12	N	
122	Rate/Value Qualifier	C ID 2/2	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Segment Remarks:

Example:

L3*9*G***9***9*X*9*K!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0030		L1	O	20	1	L1-C3
0030	35	L1	M	1	1	Rate and Charges

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
L1				
213	Lading Line Item Number	O N0 1/3	O N0 1/3	Map Instructions Instruction nr 1 <i>Instruction</i> Incremental Starting in 1
60	Freight Rate	C R 1/9	N	
122	Rate/Value Qualifier	C ID 2/2	N	
58	Charge	C N2 1/12	C N2 1/12	SHW: Show Collect Charges, AG: Overseas Agent PPD: Show prepaid Charges, OY: Local Client ALL: Prepaid and Collect Charges CCL: Show Original As Agreed & Copy with Collect Charges, AG: Overseas Agent CPP: Show Original As Agreed & Copy with Prepaid Charges, OY: Local Client CAL: Show Original As Agreed & Copy with Prepaid Charges and Collect Charges "NON" :COLLECT Non charges, AG: Overseas Agent, "NON" : Non charges, PREPAID, OY: Local Client, NON: Prepaid and Collect Charges "AGR" :COLLECT Non charges, AG: Overseas Agent, "AGR" : Non charges, PREPAID, OY: Local Client, AGR: Prepaid and Collect Charges Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = SHW" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 2 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = PPD" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard		Implementation	
Tag	Name	St Format	Usage / Remark
			Instruction nr 3 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "ALL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 4 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CCL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 5 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CPP" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 6 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "CAL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 7 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard		Implementation	
Tag	Name	St Format	Usage / Remark
			where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 8 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 9 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 10 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 11 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet Instruction nr 12 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C506.1154 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= ((SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") OR (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY")) AND SG7/MOA/C516.5025= "10" <i>Instruction</i> "Map SG7/MOA/C516.5004 Skip any MOA loops

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				where line amount = 0 and negative amounts and if SG7-TCC/C200.8023 = "COM" or "CMT" <i>Add. Info</i> Halted Message if condition is not meet
191	Advances	C N2 1/9	N	
117	Prepaid Amount	C N2 1/9	N	
120	Rate Combination Point Code	O AN 3/9	N	
150	Special Charge or Allowance Code	O ID 3/3	O ID 3/3	Map Instructions Instruction nr 1 <i>Instruction</i> TBD
121	Rate Class Code	O ID 1/3	N	
39	Entitlement Code	O ID 1/1	N	
16	Charge Method of Payment	O ID 1/1	O ID 1/1	SHW: Show Collect Charges, AG: Overseas Agent PPD: Show prepaid Charges, OY: Local Client ALL: Prepaid and Collect Charges CCL: Show Original As Agreed & Copy with Collect Charges, AG: Overseas Agent CPP: Show Original As Agreed & Copy with Prepaid Charges, OY: Local Client CAL: Show Original As Agreed & Copy with Prepaid Charges and Collect Charges NON AGR Map Instructions Instruction nr 1 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/ C5601.554 = SHW" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/ C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> Hard Code "C" Instruction nr 2 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/ C5601.554 = PPD" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/ C082.3039 WHERE SG12/NAD/3035 = "OY") <i>Instruction</i> Hard Code "P" Instruction nr 3 <i>Condition</i> 1. If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/ C5601.554 = ALL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/ C082.3039 WHERE SG12/NAD/3035 = "OY") 2. If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/ C5601.554 = ALL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/ C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> 1. Hard Code "P" 2. Hard Code "C" Instruction nr 4

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				<i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "CCL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> Hard Code "C" Instruction nr 5 <i>Condition</i> If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "CPP" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") <i>Instruction</i> Hard Code "P" Instruction nr 6 <i>Condition</i> 1. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = ALL" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") 2. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = ALL" and SG7/FTX/C108.4440(5) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> 1. Hard Code "P" 2. Hard Code "C" Instruction nr 7 <i>Condition</i> 1. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") 2. If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> 1. Hard Code "P" 2. Hard Code "C" Instruction nr 8 <i>Condition</i> SG3/RFF/C5601.554 = "AGR" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "OY") 2. If SG3/RFF/C506.1153 = "AGR"and SG3/RFF/C5601.554 = "NON" and SG7/FTX/C108.4440(4) WHERE SG7/FTX/4451 = ZCC"= (SG12/NAD/C082.3039 WHERE SG12/NAD/3035 = "AG") <i>Instruction</i> 1. Hard Code "P" 2. Hard Code "C"
276	Special Charge Description	O AN 2/25	O AN 2/25	
257	Tariff Application Code	O ID 1/1	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



		Standard	Implementation	
Tag	Name	St Format	St Format	Usage / Remark
74	Declared Value	C N2 2/12	N	
122	Rate/Value Qualifier	C ID 2/2	N	
372	Lading Liability Code	O ID 1/1	N	
220	Billed/Rated-as Quantity	C R 1/11	N	
221	Billed/Rated-as Qualifier	C ID 2/2	N	
954	Percent	O R 1/10	N	
100	Currency Code	O ID 3/3	N	
610	Amount	O N2 1/15	N	

Segment Remarks:**Example:**

L1*1***64047****AVA***A*XX!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025 Print date: 22/08/2025
 Page: 67 /

Counter	No	Tag	St	MaxOcc	Level	Name
0030		L1	O	20	1	L1-C3
0040	36	C3	O	1	2	Currency

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
C3				
100	Currency Code	M ID 3/3	M ID 3/3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7/MOA/C516.5025 = "23" <i>Instruction</i> Map SG7/MOA/C516.6345
280	Exchange Rate	O R 4/10	N	
100	Currency Code	O ID 3/3	N	
100	Currency Code	O ID 3/3	N	

Segment Remarks:

SHW: Show Collect Charges

PPD: Show prepaid Charges

ALL: Prepaid and Collect Charges

CCL: Show Original As Agreed & Copy with Collect Charges,

CPP: Show Original As Agreed & Copy with Prepaid Charges

CAL: Show Original As Agreed & Copy with Prepaid Charges and Collect Charges

"NON" : Non charges

"AGR" As Agreed

Map Instructions**Instruction nr 1***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "SHW" AND SG7/MOA/C516.5025 = "10"*Instruction* Map first instance of SG7/MOA/C516.6345**Instruction nr 2***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "PPD" AND SG7/MOA/C516.5025 = "10"*Instruction* Map first instance of SG7/MOA/C516.6345**Instruction nr 3***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "ALL" AND SG7/MOA/C516.5025 = "10"*Instruction* Map first instance of SG7/MOA/C516.6345**Instruction nr 4***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "CCL" AND SG7/MOA/C516.5025 = "10"*Instruction* Map first instance of SG7/MOA/C516.6345**Instruction nr 5***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "CPP" AND SG7/MOA/C516.5025 = "10"*Instruction* Map first instance of SG7/MOA/C516.6345**Instruction nr 6***Condition* If SG3/RFF/C506.1153 = "CNO" and SG3/RFF/C5601.554 = "CALL" AND SG7/MOA/C516.5025 = "10"

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

Counter = Counter of segment/group within the standard

St = Status

EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent,

A=Advised, N=Not used



Instruction Map first instance of SG7/MOA/C516.6345

Instruction nr 7

Condition If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "NON" AND SG7/MOA/C516.5025= "10"

Instruction Map first instance of SG7/MOA/C516.6345

Instruction nr 8

Condition If SG3/RFF/C506.1153 = "CNO"and SG3/RFF/C5601.554 = "AGR" AND SG7/MOA/C516.5025= "10"

Instruction Map first instance of SG7/MOA/C516.6345

Example:

C3*USD!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0080	37	SE	M	1	0	Transaction Set Trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
SE				
96	Number of Included Segments	M N0 1/10	M N0 1/10	Map Instructions Instruction nr 1 <i>Instruction</i> System generated
329	Transaction Set Control Number	M AN 4/9	M AN 4/9	Map Instructions Instruction nr 1 <i>Instruction</i> System generated

Segment Remarks:**Example:**

SE*55*0534!

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

D_TX_EE_CORNING_FIV_D10B_ 310 / X12 004010
 310_4010_OE_mp; 1-DEV;
 EDIC0003861

Issue date: 06/08/2025 Print date: 22/08/2025
 Page: 70 /

Counter	No	Tag	St	MaxOcc	Level	Name
0000	38	GE	C	1	0	Functional Group Trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GE				
97	Number of Transaction Sets Included	M N0 1/6	M N0 1/6	Map Instructions Instruction nr 1 <i>Instruction</i> System generated
28	Group Control Number	M N0 1/9	M N0 1/9	Map Instructions Instruction nr 1 <i>Instruction</i> System generated

Segment Remarks:**Example:**

GE*1*534!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0000	39	IEA	M	1	0	Interchange Control Trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IEA				
I16	Number of Included Functional Groups	M N0 1/5	M N0 1/5	Map Instructions Instruction nr 1 <i>Instruction</i> System generated
I12	Interchange Control Number	M N0 9/9	M N0 9/9	Map Instructions Instruction nr 1 <i>Instruction</i> System generated

Segment Remarks:**Example:**

IEA*1*000000534!

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Example Message

No	Tag	Example
01	ISA	ISA*00* *00* *ZZ*SCHENKEROCEAN*01*GTNEXUS*250625*1024*U*00401*000000534*0*P*:
02	GS	GS*IO*SCHENKEROCEAN*GTNEXUS*20250625*1024*1*X*004010!
03	ST	ST*310*XXXX!
04	B3	B3*B*CNSHA0001491079**11**20250806*9***XX**1A!
05	B2A	B2A*53*BL!
06	N9	N9*0B*CNSHA0001491079!
07	N9	N9*IV*2025-0661!
08	N9	N9*BN*X!
09	V1	V1**MAERSK ATHABASCA**519E!
10	C3	C3*USD**USD!
11	Y2	Y2*9***XXXX!
	N1	
12	N1	N1*BT*CORNING INC*25*USCRG1*11!
13	N3	N3*RIVERFRONT PLZ 1!
14	N4	N4*CORNING*NY*14831-000*US!
	N1	
15	N1	N1*CN*SOLAR HEMLOCK!
16	N3	N3*NORTH ORR ROADHEMLOCK*PLAZA CORNING NY 14831;TIM LOFTUS!
	N1	
17	N1	N1*SH*SHANGHAI E-HENG IMPORT AND EXPORT!
18	N3	N3*RM 1502-1503 NO 61 NANJING*ROAD E,SHANGHAI CHINA 200002;TEL 021- 63 33 0192!
	N1	
19	N1	N1*N1*SOLAR HEMLOCK!
20	N3	N3*NORTH ORR ROADHEMLOCK*CORNING IMPORT TC ;CORNING IMPORT TC!
	R4	
21	R4	R4*R*UN*CNSHA*Shanghai*CN!
	R4	
22	R4	R4*L*UN*X*XX*AD!
23	DTM	DTM*001*20250806*2158*01!
	R4	
24	R4	R4*D*UN*X*XX*AD!
25	DTM	DTM*001*20250806*2158*LT!
	R4	

No = Consecutive segment number



No	Tag	Example
26	R4	R4*E*UN*X*XX*AD!
27	DTM	DTM*001*20250806*2158*01!
	LX	
28	LX	LX*1!
	N7	
29	N7	N7*HAMU*315893*3212.200*G****17.770*X*****K*0****45GP!
30	QTY	QTY*39*9*PC!
31	M7	M7*XX!
	L0	
32	L0	L0****9*G*9*X**PCS**K!
33	L5	L5**Heavy-duty workbench Tel/mobile# 607-684-81!
34	L3	L3*9*G***9****9*X*9*K!
	L1	
35	L1	L1*1***64047****AVA***A*XX!
36	C3	C3*USD!
37	SE	SE*55*0534!
38	GE	GE*1*534!
39	IEA	IEA*1*000000534!

No = Consecutive segment number