
M450 · RTO-144 CONNECTIONS

M450 - Program Summing Amp · ELCO 00-6007-015-940-002 · 15 contacts, single row


REAR CONNECTOR

REAR VIEW · CARD EDGE · 15 CONTACTS

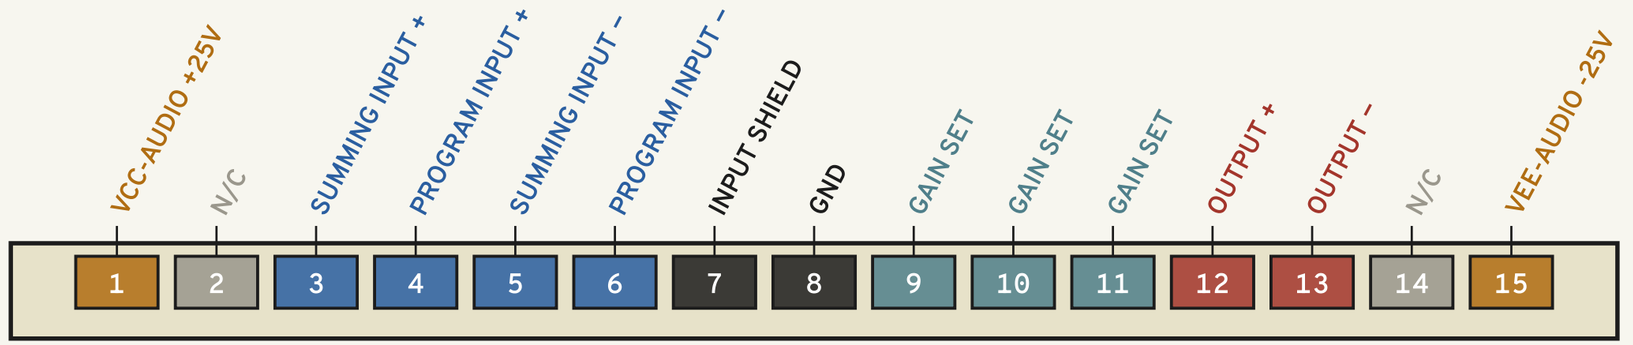

Input · Output · Power · Ground / chassis · Jumper · Not connected

INPUTS AND OUTPUTS

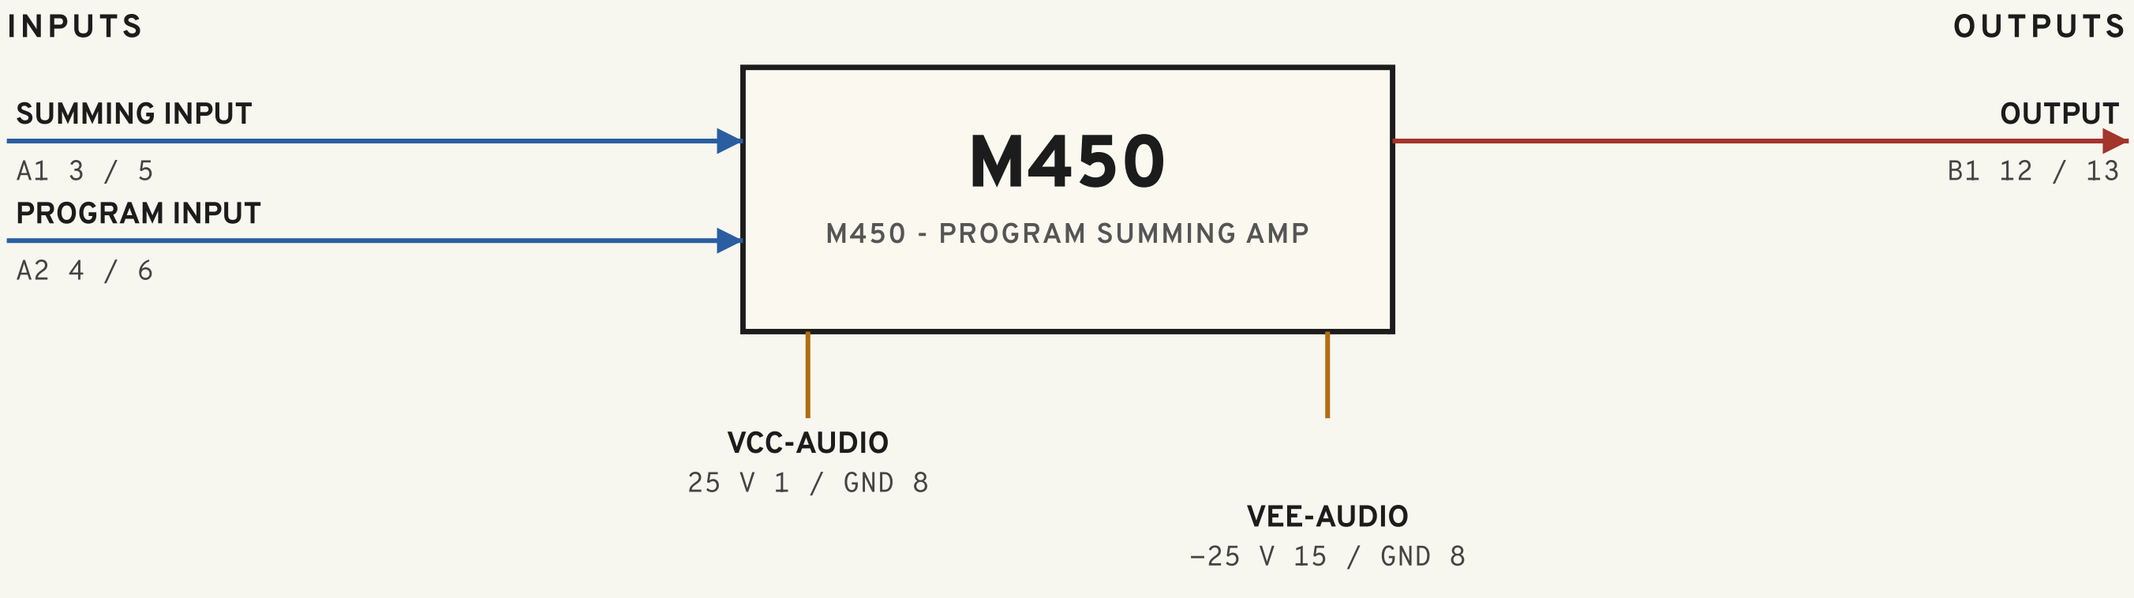

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	NOTE
A1	SUMMING INPUT	in	3	5	input when used as summing amp
A2	PROGRAM INPUT	in	4	6	input when used as program amp
B1	OUTPUT	out	12	13	—

Source: Ward-Beck drawing 450-04-001 iss. 2 (June 1976), M450 and M450A program/summing amplifier connector layout; manual p. 15 pin out. Verify against the module before wiring.

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	—	25	—	1	8	—
VEE-AUDIO	—	-25	—	15	8	—

OTHER PINS

SIGNAL	PINS
INPUT SHIELD	7
COMMON	8
GAIN SET	9, 10, 11
N/C	2, 14

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M450 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 22 2026