
M406 · RTO-144 CONNECTIONS


M406 Compressor · out 600 Ω

REAR CONNECTOR

REAR VIEW · CARD EDGE · CONTACTS 1-22 SHOWN

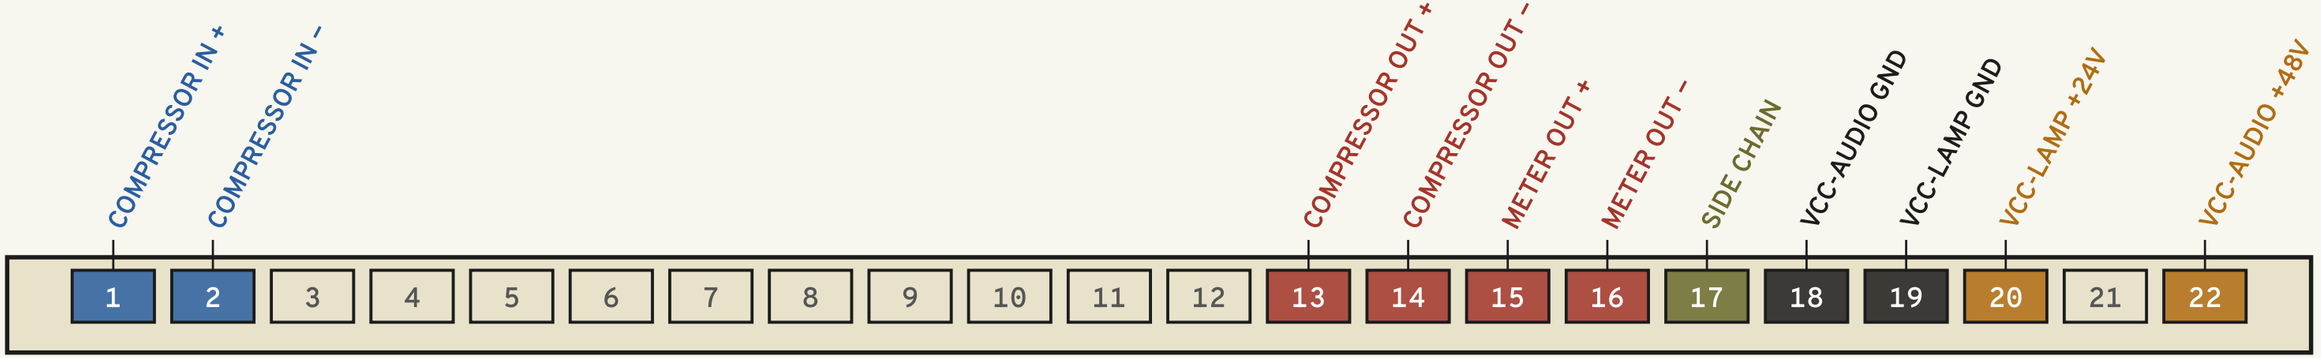

INPUTS AND OUTPUTS

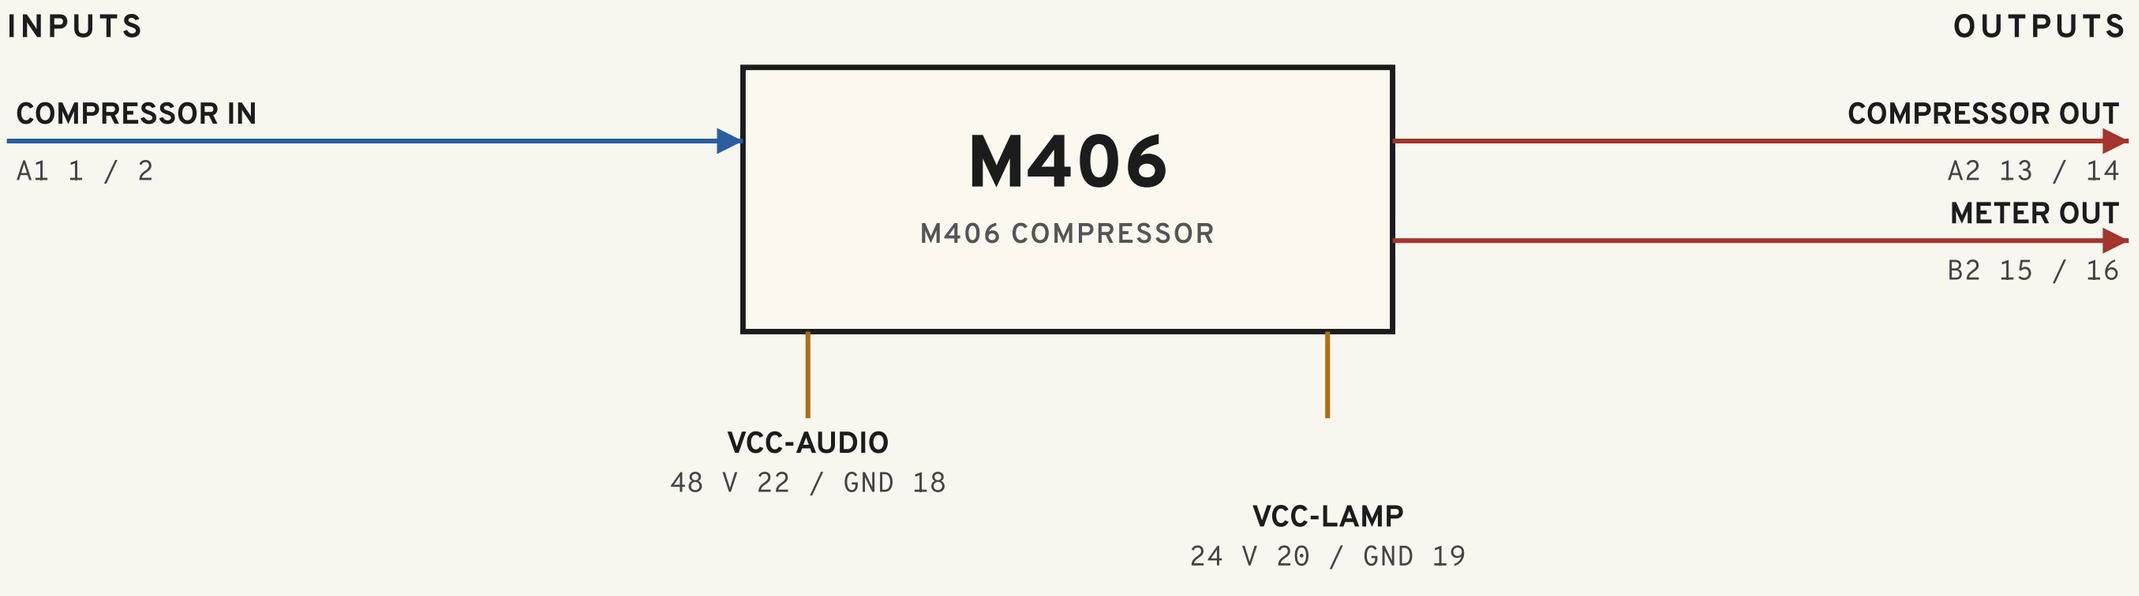

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Compressor IN	in	1	2	1.A.1.P	2.A.1.N
A2	Compressor OUt	out	13	14	13.A.2.P	14.A.2.N
B2	Meter OUT	out	15	16	15.B.2.P	16.B.2.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	OLD	48	0.1	22	18	—
VCC-LAMP	OLD	24	0.1	20	19	—

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M406 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026