
# M453 ·RTO-144 CONNECTIONS

·out 600 Ω

## REAR CONNECTOR

### P2 — REAR VIEW ·CARD EDGE ·44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

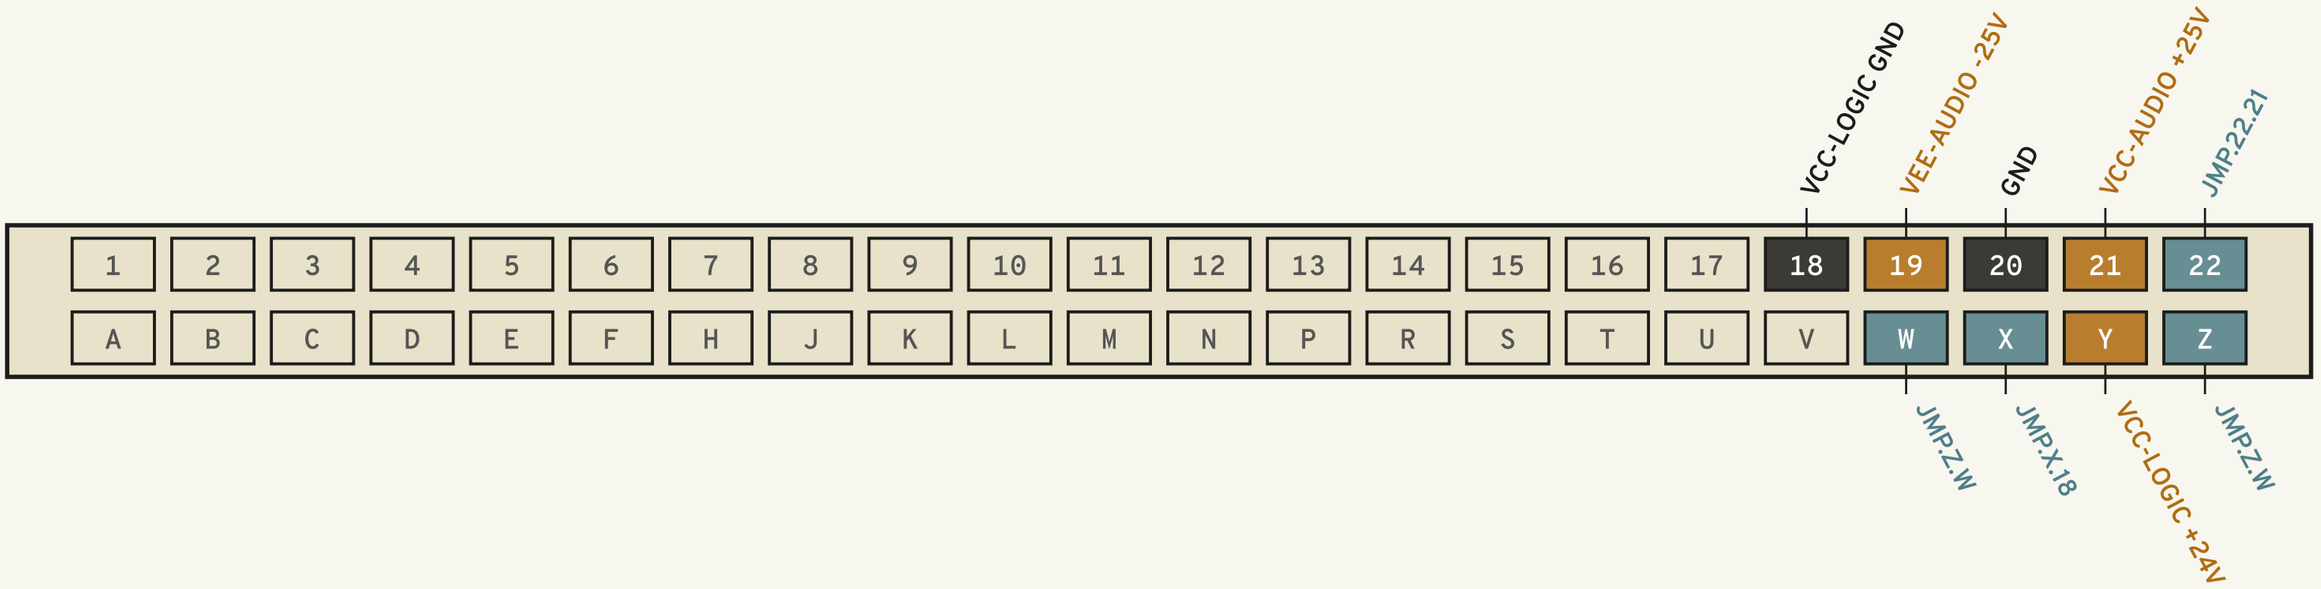



Power  Ground / chassis  Jumper

## INPUTS AND OUTPUTS

INPUTS

OUTPUTS

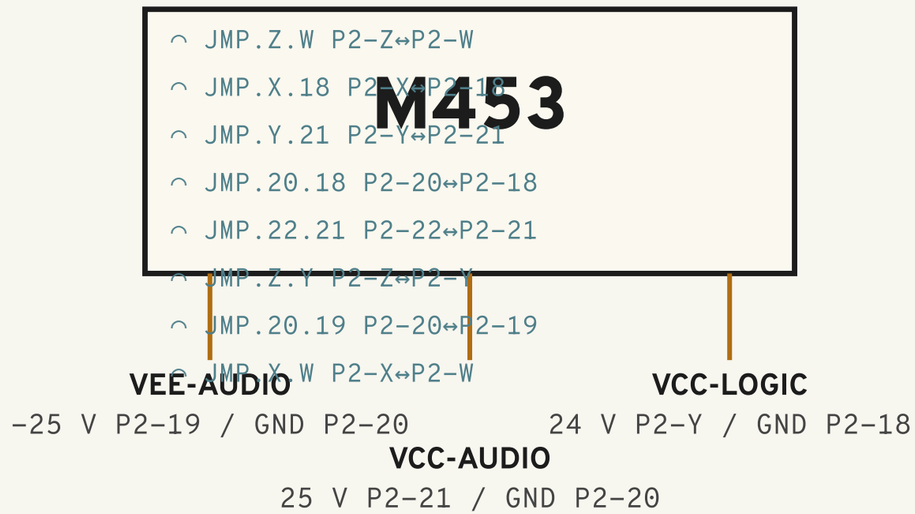


## POWER · BENCH PSU

| RAIL | STYLE | VOLTS | MAX A | SUPPLY | GROUND | LINK |
|---|---|---|---|---|---|---|
| VEE-AUDIO | NEW | -25 | 0.1 | P2-19 | P2-20 | 2 |
| VCC-AUDIO | NEW | 25 | 0.2 | P2-21 | P2-20 | 1 |
| VCC-LOGIC | NEW | 24 | 0.1 | P2-Y | P2-18 | — |

## JUMPERS

| FUNCTION | DESIGNATION | FROM | TO |
|---|---|---|---|
| CH ON LAMP | JMP.Z.W | P2-Z | P2-W |
| CH ON GND | JMP.X.18 | P2-X | P2-18 |
| 24V Jumper | JMP.Y.21 | P2-Y | P2-21 |
| CH ON GND | JMP.20.18 | P2-20 | P2-18 |
| Insert + | JMP.22.21 | P2-22 | P2-21 |
| Insert - | JMP.Z.Y | P2-Z | P2-Y |
| Fader + | JMP.20.19 | P2-20 | P2-19 |
| Fader - | JMP.X.W | P2-X | P2-W |

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

**WBS WARD-BECK SYSTEMS LTD.**

| | | | |
|---|---|---|---|
| TITLE | M453 RTO-144 CONNECTIONS | | |
| DRN. | MAKE_RTO144.PY | DATE | OCT 17 2026 |