
M472A · RTO-144 CONNECTIONS

M472A - Stereo Equalizer

REAR CONNECTOR

REAR VIEW · CARD EDGE · CONTACTS 1-11 SHOWN

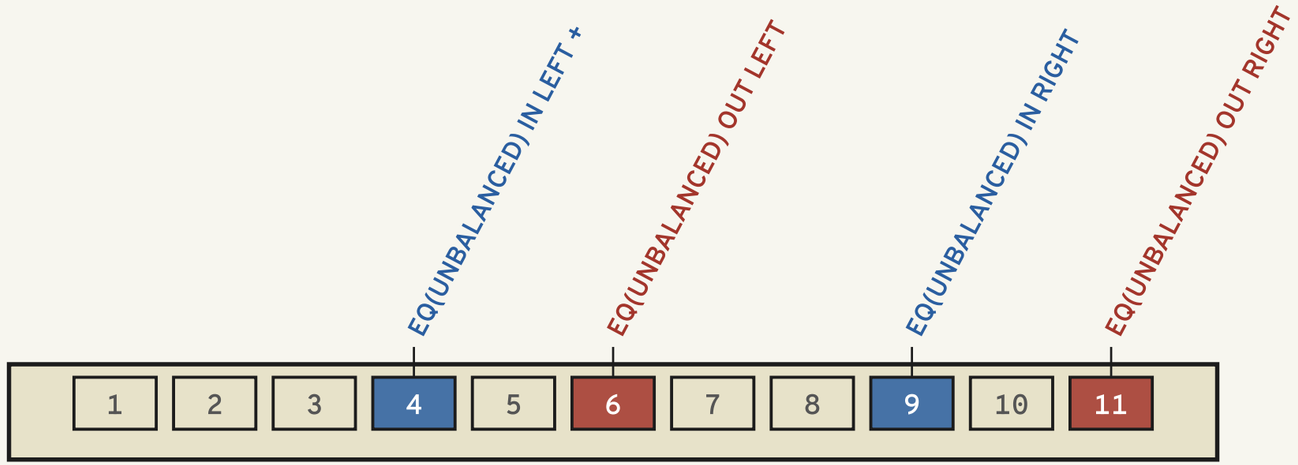

Input Output

INPUTS AND OUTPUTS



AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	EQ(unbalanced) IN LEFT	in	4	—	4.A.1.P	.A.1.N
A2	EQ(unbalanced) OUT LEFT	out	6	—	6.A.2.P	.A.2.N

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A3	EQ(unbalanced) IN RIGHT	in	9	—	9.A.3.P	.A.3.N
A4	EQ(unbalanced) OUT RIGHT	out	11	—	11.A.4.P	.A.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M472A RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026