
M522C · RTO-144 CONNECTIONS

Stereo Equalizer


REAR CONNECTOR

REAR VIEW · CARD EDGE · CONTACTS 1-21 SHOWN

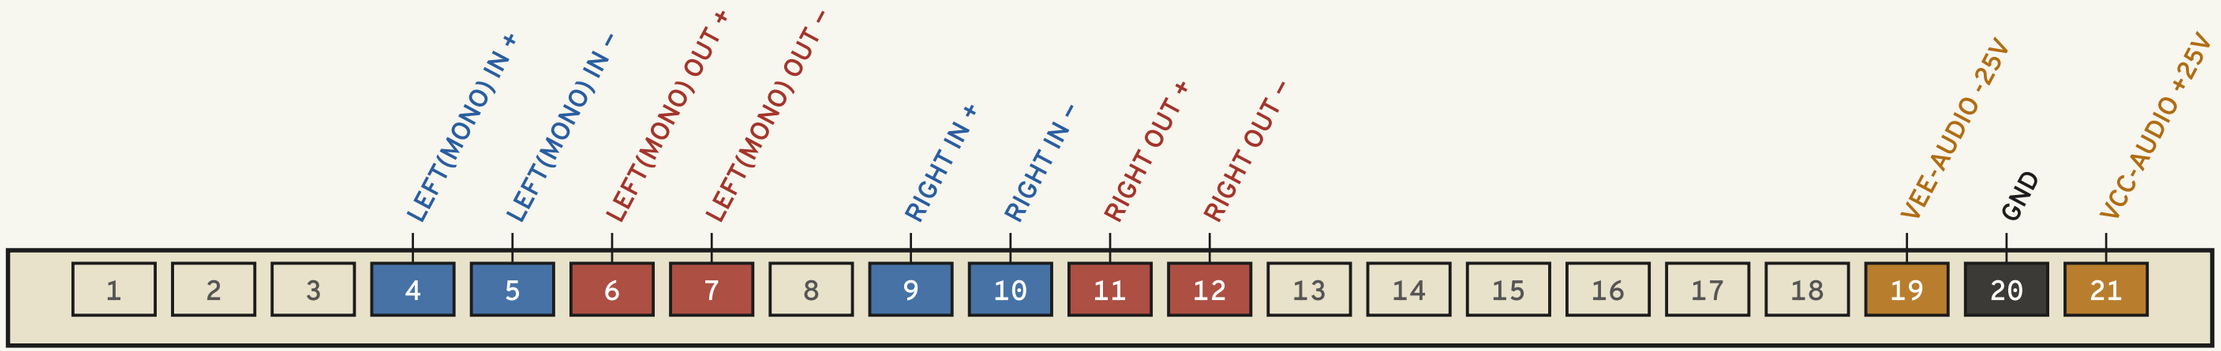

Input · Output · Power · Ground / chassis

INPUTS AND OUTPUTS

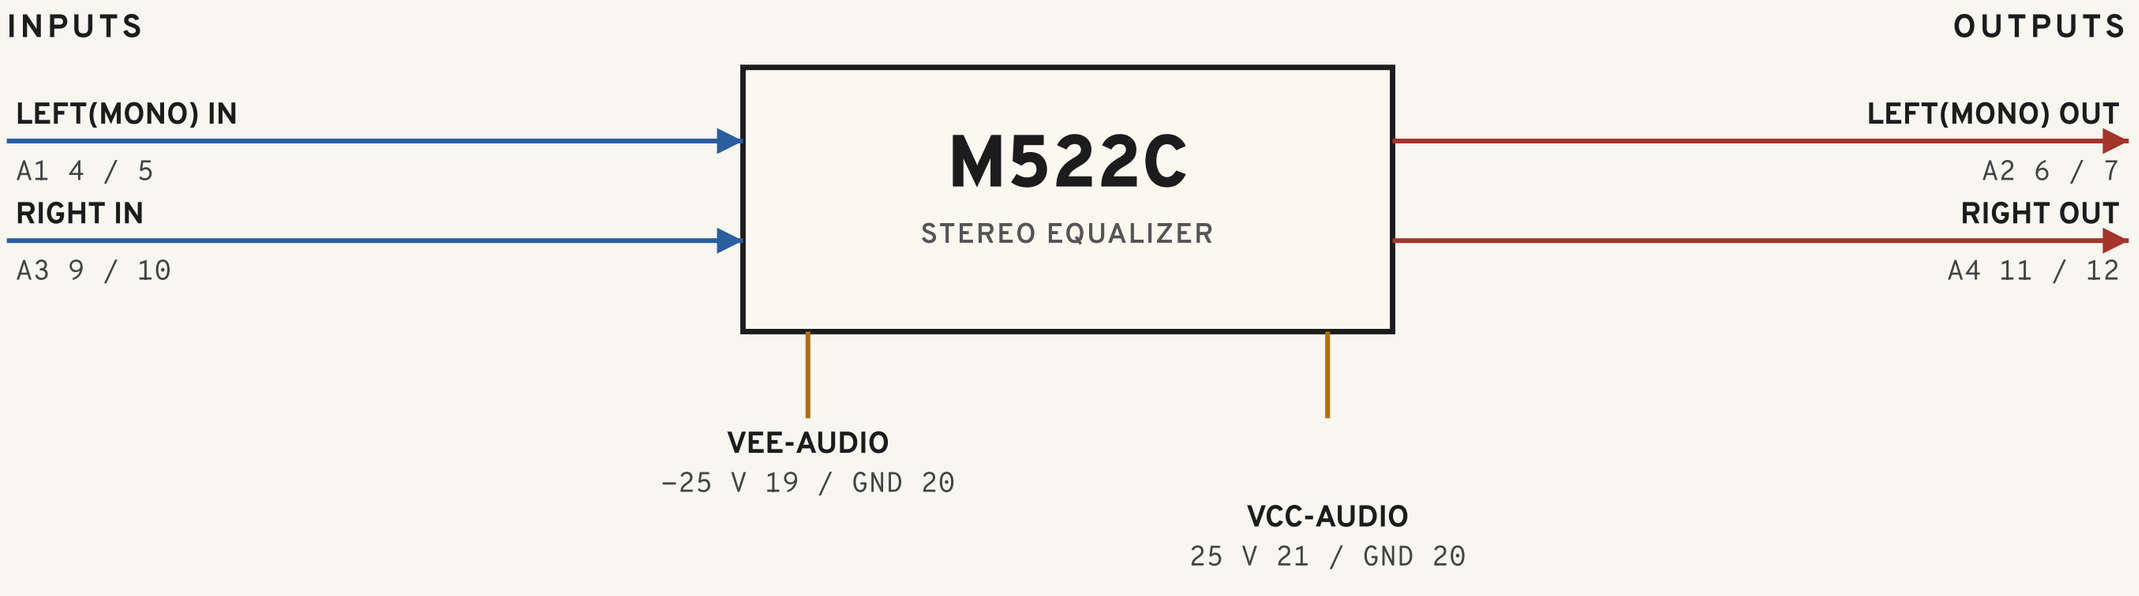

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Left(Mono) IN	in	4	5	4.A.1.P	5.A.1.N
A2	LEFT(MONO) OUT	out	6	7	6.A.2.P	7.A.2.N
A3	Right IN	in	9	10	9.A.3.P	10.A.3.N
A4	Right Out	out	11	12	11.A.4.P	12.A.4.N

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.2	19	20	2
VCC-AUDIO	NEW	25	0.2	21	20	1

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M522C RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026